

Iris Quality Standardization




Elham Tabassi



Role of Standards


- » Open specifications for iris cameras, iris image properties (quality) and iris image record.
- » Prevent vendor lock-in.
- » Allows for a marketplace of off-the-shelf product.
- » Allows modular integration of products without comprising architecture scope.
- » Allows for performance improvement (quality by design)
 - » Prevent GIGO

Prevent GIGO

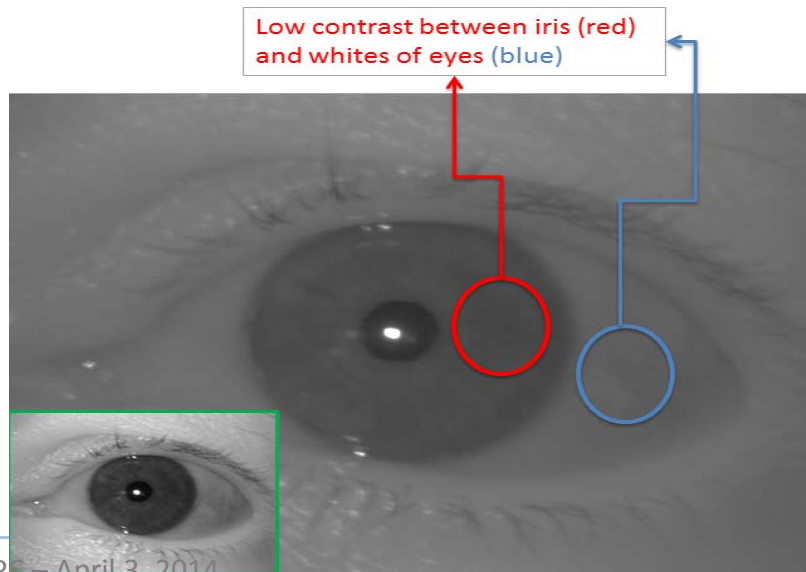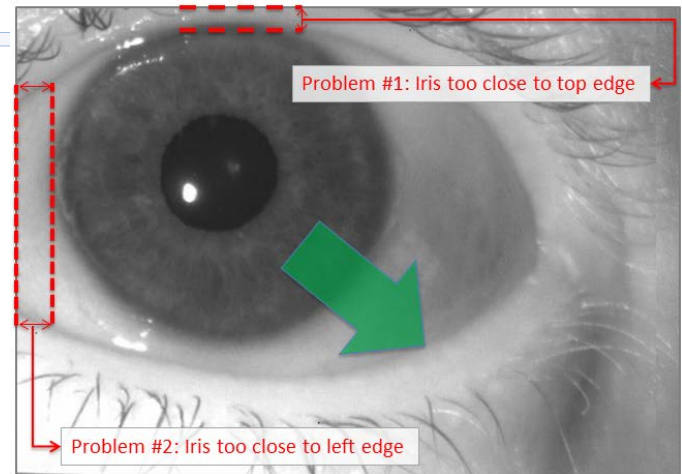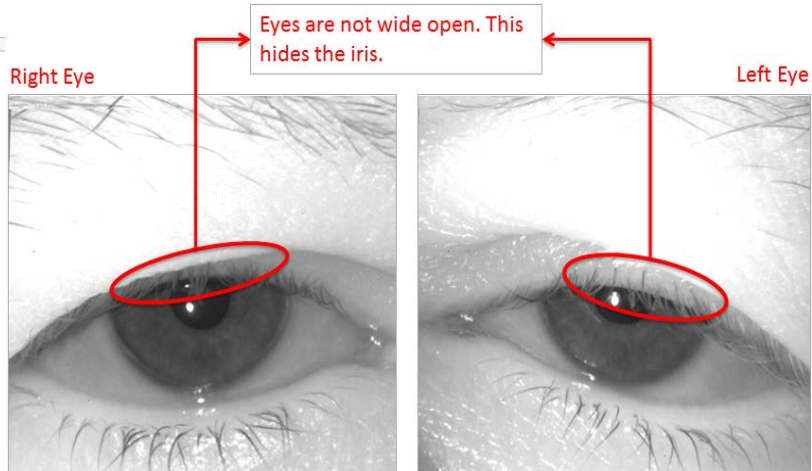


Subject is not looking into the camera.


Looking down




Looking up



Looking left



Looking right



History

2002: IrisCode

2005: : Completion of ISO/IEC 19794-6 G1 (polar + rectilinear)
(includes an 'informative' annex on image quality)

2007: ANSI/NIST ITL-1:2007 Type 17

2008: Initiation of NIST IREX program

2009: Initiation of ISO/IEC 29794-6

2011: : ISO/IEC 19794-6 G2
ANSI/NIST ITLS-1:2011 Type 17

ISO/IEC 19794-2011: Polar format was removed
because interoperability is sensitive to correct
determination of the iris and pupil centers.

2013: SP 800-76 (PIV specification)

Subcommittee 37 “Biometrics”

JTC 1 SC37 ISO/IEC 19794

- » Biometric data interchange format
 - Goal: interoperability
 - Avoid vendor lock-in
- » Multipart standard
 - Part 6: Iris image : Published 2011-09-29
 - Part 1: Framework
 - Parts 2(finger minutiae), 4(finger image), 5(face image), etc.

JTC 1 SC37 ISO/IEC 29794

- » Biometric sample quality
 - Goal: interoperable performance
 - Avoid vendor lock-in
 - Avoid GIGO
- » Multipart standard
 - Part 6: Iris image: Expected 2014
 - Part 1: Framework
 - Part 4(finger image) + Technical Report Part 5(face image).

ISO/IEC 19794-6

Biometric data interchange format – Part 6: Iris image

- specifies iris image interchange formats for biometric enrolment, verification and identification systems.
 - Image format
 - Compression format for size constrained applications
- Out of scope
 - requirements on the optical specifications of cameras, photometric properties of iris images, enrolment processes, workflow and use of iris equipment.
- AMD 1: Conformance Testing

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Conformance	1
3 Normative references	2
4 Terms and definitions	2
5 Symbols and abbreviated terms	3
6 Iris image content specification	3
6.1 General	3
6.2 Uncropped Iris Image	4
6.3 VGA Iris Image	5
6.4 Cropped Iris Image	5
6.5 Cropped and Masked Iris Image	6
6.5.1 General	6
6.5.2 Masking of the sclera	6
6.5.3 Masking of the eyelids	6
6.5.4 Mask transition blurring	7
7 Iris image format specification	7
7.1 General	7
7.2 Iris image biometric data record	7
7.3 Iris general header structure	8
7.4 Iris representation header structure	8
7.4.1 Image type	11
7.4.2 Optional estimation of relative head and camera roll	11
7.4.3 Localisation	11
7.4.4 Image data length	11
7.4.5 Header constants	12
7.5 Representation body	12
8 Registered Format Type Identifier	13
Annex A (normative) Conformance testing methodology	14
Annex B (informative) Iris image capture	15
Bibliography	19

ISO/IEC 29794-6


Biometric sample quality – Part 6: Iris image

- » Defines and quantifies iris image quality components.
 - » for a single image,
 - » for two images being compared, and
 - » for acquisition device.
- » Considers subject, environment and device covariates.
- » For each quality component, it specifies
 - » description, computation method, units, and valid values/threshold.

Table of contents

1! Scope	1!
2! Conformance	1!
3! Normative references	2!
4! Terms and definitions	2!
4.1! covariate	2!
4.2! defocus	2!
4.3! depth of field	2!
4.4! iris centre	2!
4.5! iris radius	2!
4.6! metric	2!
4.7! modulation	3!
4.8! modulation transfer function	3!
4.9! normalized image	3!
4.10! pupil centre	3!
4.11! segmentation	3!
4.12! spatial sampling rate	3!
5! Acronyms and abbreviated terms	3!
6! Iris image quality metrics	3!
6.1! General	3!
6.2! Required iris image quality metrics computed from a single image	4!
6.2.1! Usable iris area	4!
6.2.2! Iris-sclera contrast	5!
6.2.3! Iris-pupil contrast	6!
6.2.4! Pupil boundary circularity	7!
6.2.5! Grey scale utilisation	8!
6.2.6! Iris radius	9!
6.2.7! Pupil to iris ratio	9!
6.2.8! Iris pupil concentricity	10!
6.2.9! Margin adequacy	10!
6.3! Recommended iris image quality metrics computed from a single image	12!
6.3.1! Sharpness	12!
6.3.2! Frontal gaze-elevation	12!
6.3.3! Frontal gaze-azimuth	13!
6.3.4! Motion blur	14!
6.4! Iris image quality metrics computed from two images	14!
6.4.1! Common usable iris area	14!
6.4.2! Dilation constancy	15!
6.4.3! Illumination similarity	15!
6.5! Unified quality score	15!
6.5.1! General	15!
6.5.2! Computational method	16!
7! Iris acquisition quality	16!
7.1! General	16!
7.2! Dedicated illumination	16!
7.3! Modulation transfer function	17!
7.4! Spatial sampling rate	18!
7.5! Optical distortion	18!
7.6! Pixel aspect ratio	18!
7.7! Sensor signal-to-noise ratio	19!

IQCE :: Quantitative support

- ✕ The 2nd activity under  **irex**
IRIS EXCHANGE
- ✕ Funded by DHS S+T
 - Project “Radical improvement in iris quality assessment and maturing multimodal biometric utilization”
- ✕ An evaluation based program for development of clear, implementable, and interoperable iris quality standard ISO/IEC 29694-6.
 - To establish requirements on software or hardware capturing iris image
 - ✕ A refined list of image properties affecting iris recognition performance
 - To established requirements on iris image covariates

IREX II - IQCE

Iris Quality Calibration and Evaluation

Performance of Iris Image Quality Assessment Algorithms

NIST Interagency Report 7820


E. Tabassi, P. Grother, and W. Salamon

Information Access Division
National Institute of Standards and Technology



September 30, 2011

IQCE



VENDOR SUPPLIED IMAGE
QUALITY ASSESSMENT
ALGORITHM (IQAA)



**QUALITY
VECTOR**






Table 4. IQAAs output format.


The range of each metric shall be [0,254], a value of 255 means that the quality metric is not computed.

Position	Metric
1	Scalar overall quality
2	Gray level spread
3	Effective radius in pixel
4	Pupil iris ratio (ratio of pupil diameter over iris diameter)
5	Upper eyelid position (ratio of upper eyelid diameter over iris diameter)
6	Iris-sclera contrast
7	Iris-pupil contrast
8	Iris-sclera boundary shape (iris shape)
9	Iris pupil boundary shape (pupil shape)
10	Margin (image scale in N3331)
11	Interference
12	Motion blur
13	Signal to noise ratio
14	Magnification
15	Head rotation
16	Gaze angle
17	Interlace
18- 32	Reserved for future standardized quality metric
33 ... 64	Vendor-defined quality measurements


- 1** **Scalar quality**
- 2 .. 17** **Defined (standard) quality metrics**
- 18..32** **Reserved**
- 33..64** **Vendor-defined quality metrics**

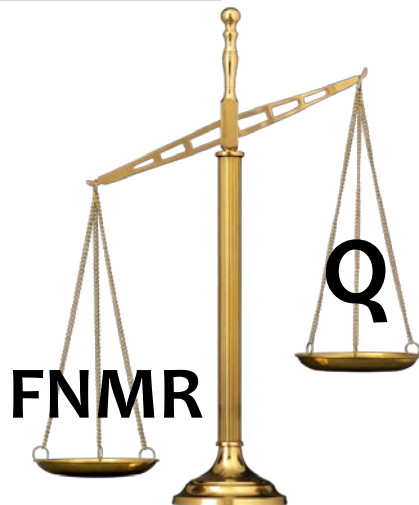

IQCE:: determining factors affecting iris recognition performance

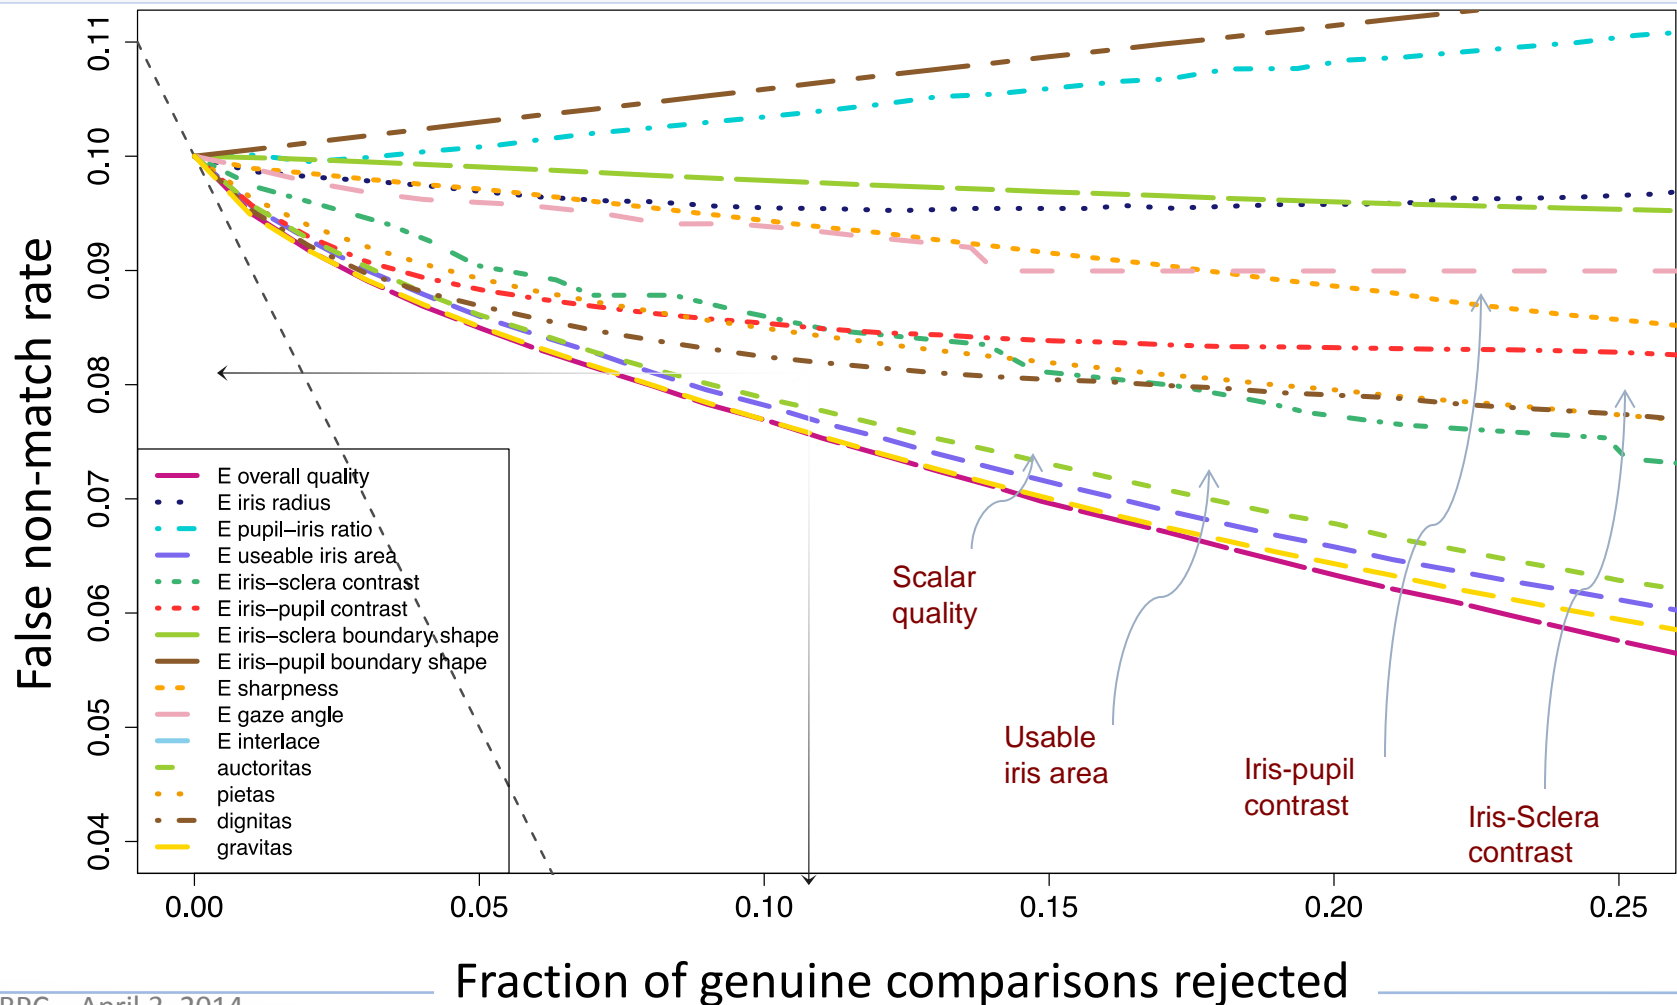

IQCE:: determining requirement (Ex. usable iris area)

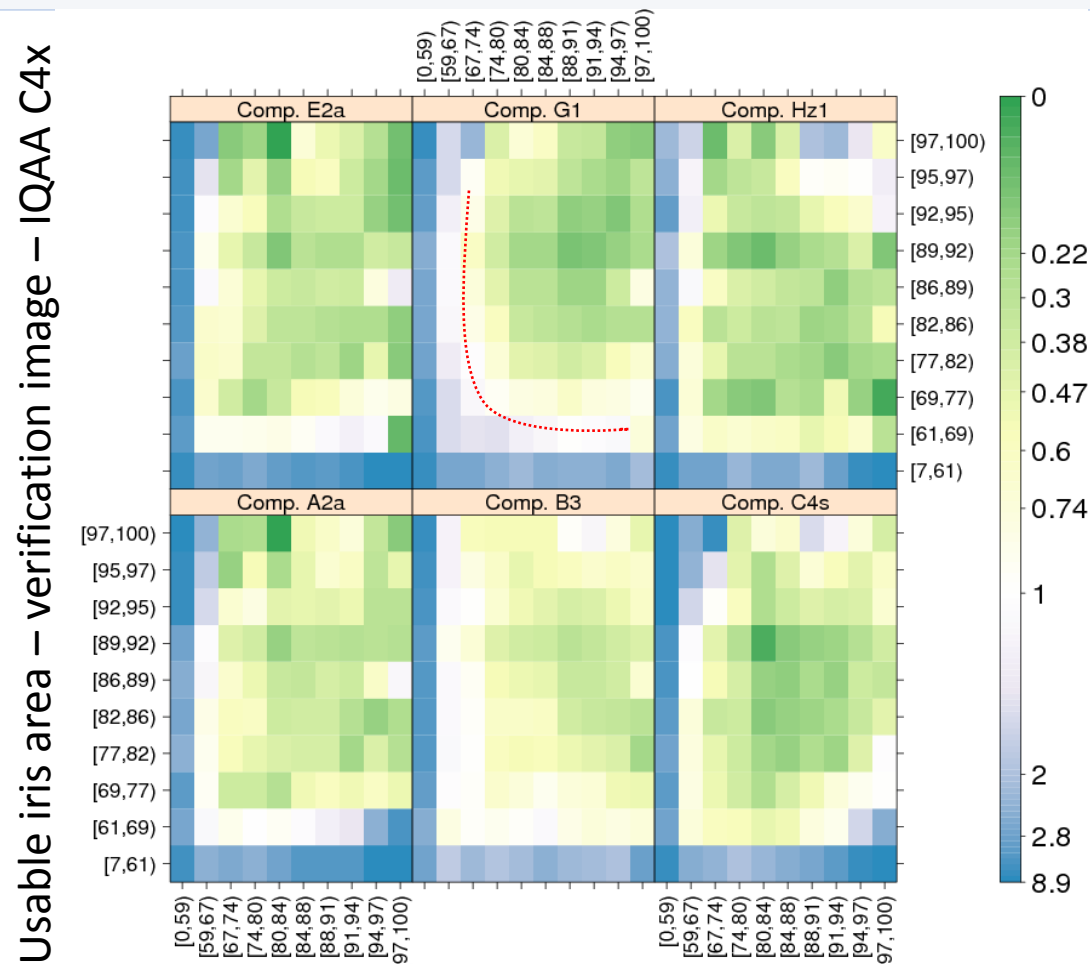

Mutual quality :: How similarity of quality between two images being compared affects performance?

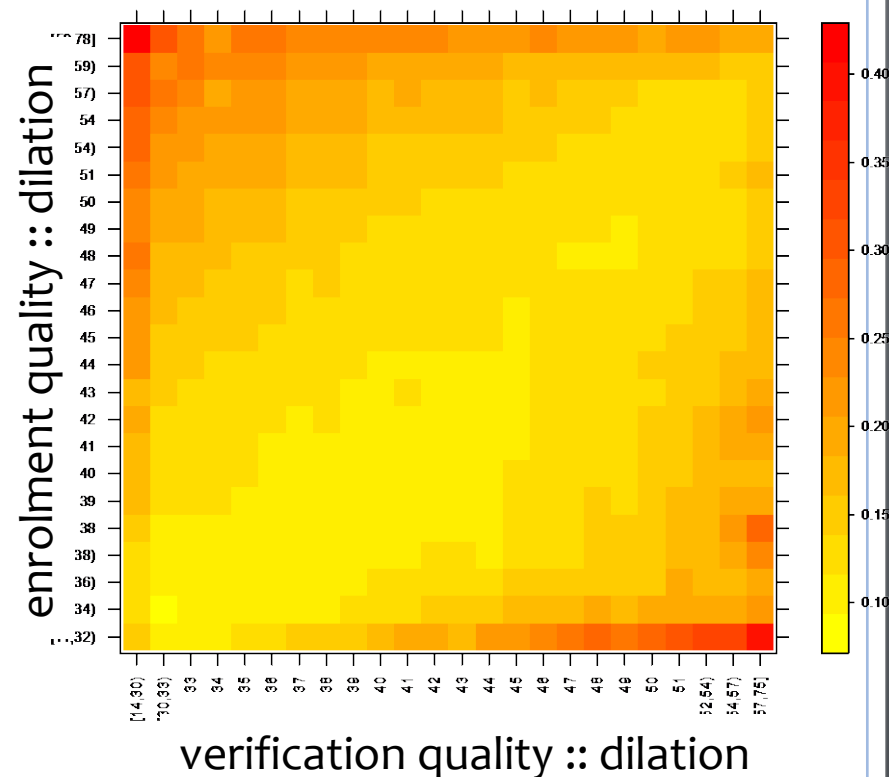
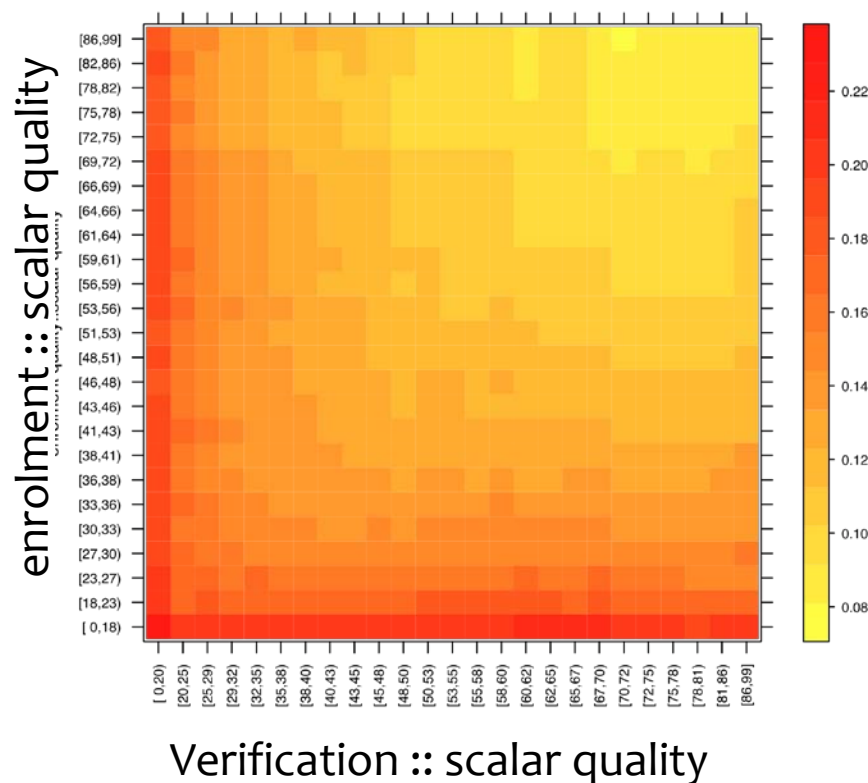


Image quality components

Required

1. Usable iris area [70,100]
2. Iris-sclera contrast [5,100]
3. Iris pupil contrast [30,100]
4. Pupil boundary circularity
5. Grey scale utilisation [6,20]
6. Iris radius [80,253]
7. Pupil iris ratio [20,60]
8. Iris pupil concentricity [90,100]
9. Margin adequacy [80,100]

Recommended

10. Sharpness
11. Frontal gaze-elevation
12. Frontal gaze-azimuth
13. Motion blur

Mutual quality

- » Illumination similarity
 - » Camera interoperability
- » Common usable iris area
- » Dilation constancy

Camera quality components

» Dedicated illumination

$$\frac{\int_{700}^{900} P(\lambda) d\lambda}{\int_{680}^{920} P(\lambda) d\lambda} \geq 0,9$$
$$\frac{\int_{700}^{800} P(\lambda) d\lambda}{\int_{700}^{900} P(\lambda) d\lambda} \geq 0,35$$
$$\frac{\int_{800}^{900} P(\lambda) d\lambda}{\int_{700}^{900} P(\lambda) d\lambda} \geq 0,35$$

» Modulation transfer function

- » modulation of more than 50% at 1lp/mm using appropriate targets.

» Optical distortion

» Pixel aspect ratio

- » between 0.99 and 1.01.

» Sensor signal-to-noise ratio

- » larger or equal to 36 dB.

» Spatial sampling rate

- » at least 15.7 pixel/mm.

Status

Time line

- Is balloted for Draft International Standard.
- Open issues:
 - Computation methods for sharpness, gaze angle
 - Computation method for unified quality score

Editorial Team

Editor: Elham Tabassi (NIST)

Co-editors:

John Daugman (Cambridge University + Morpho),

Raul Sanchez-Reillo (Universidad Carlos III de Madrid)

Adam Czajka (Warsaw University of Technology and NASK)



Thank You.

tabassi AT nist DOT gov

301 975 5292

<http://www.nist.gov/itl/iad/ig/irexii.cfm>

IREX (Iris Exchange)

NIST's umbrella program for iris recognition performance, standards, and image-based interoperability

IREX I

Accuracy of compact iris images in support of the ISO/IEC 19794-6 and ANSI/NIST Type 17 standards

2008-2009

Test

IREX II / IQCE

Image quality definition, evaluation, calibration supporting the ISO/IEC 29794-6 standard

2010-2011

Test

IREX III

One-to-many Iris recognition - Single and two-eye accuracy and resource requirements

2011-2012

Test

IREX IV

Minimum error (weighted FNIR + FPIR) one-to-many recognition; Rapid ID compression profiles

2012

Test

IREX V

Instructional and guidance materials for image collection

2012-2013

Best Practice Documents

IREX VI

Temporal dependence, Iris aging, template aging, longitudinal effects.

2012-2013

Test

IREX VII

Abstraction layers Encapsulating core iris processing functions

2013-

Best Practice Documents



Technical Approach

