



# NHTSA

NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION

## Instantaneous Safety Metric

**Frank Barickman – NHTSA**

**Josh Every – TRC**

**Bowen Weng – TRC**

**Scott Schnelle – TRC**

**Sughosh Rao - TR**

06.25.2019

# Overview

1

**Definitions**

2

**Challenges in ADS testing**

3

**Introduction of concept.**

4

**Explanation of current implementation.**

5

**Conclusions from current development and ongoing research.**

# Definition


---

## **Instantaneous Safety Metric (ISM)**

- **A measurement of performance not only related to the outcome of a situation, but also related to the probability of a collision occurring had actions varied.**

# Traditional Test Procedure Development

---

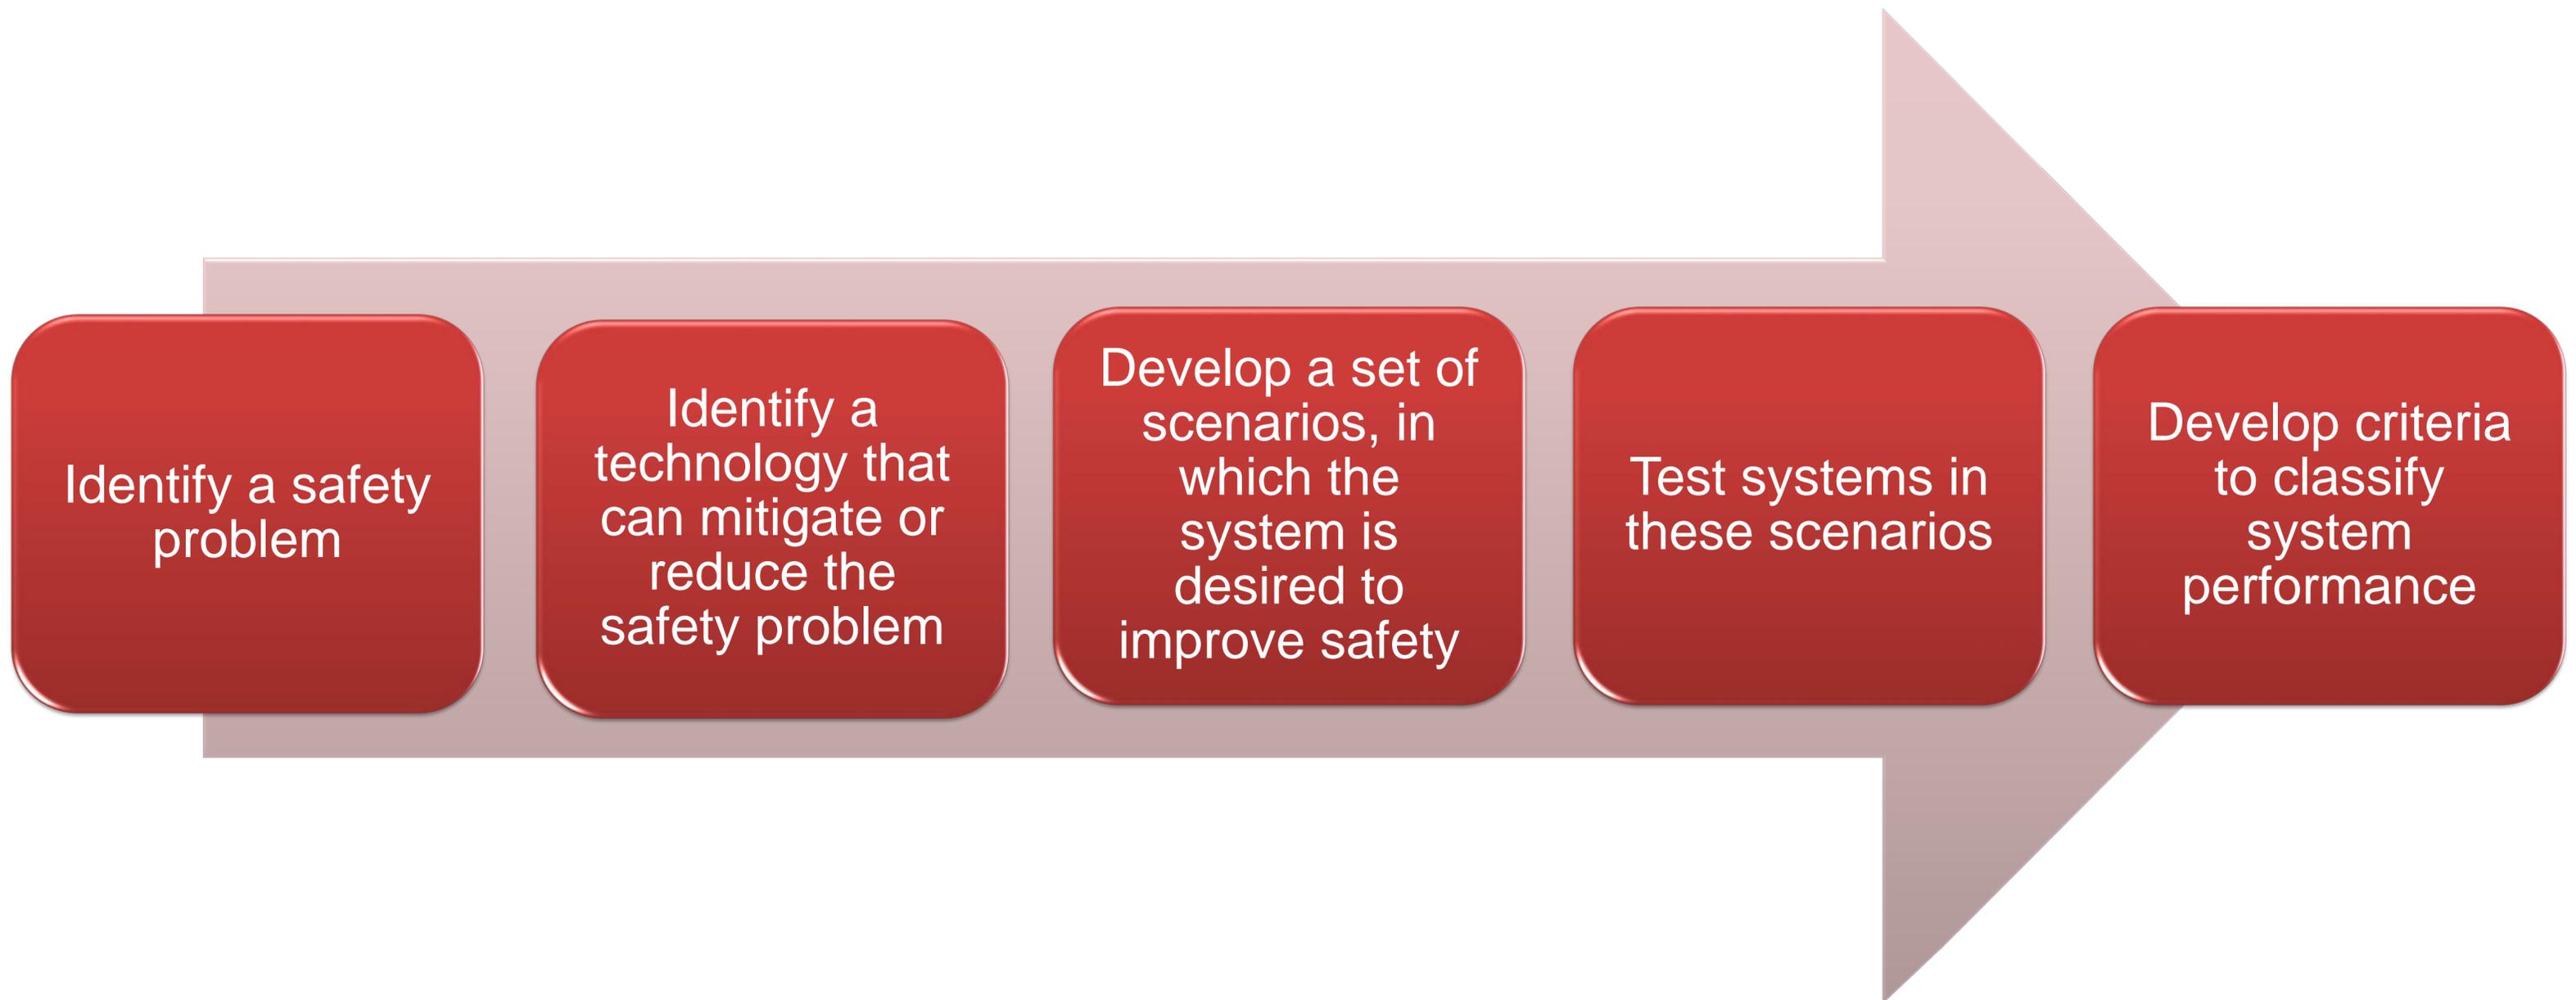

# Challenges

---

Automated Driving Systems (ADS) have a goal of proceeding through an environment safely. There are two main challenges in determining if an ADS will consistently accomplish this goal.

1. Environments are infinitely variable
  - This can be overcome by either performing a large amount of real world testing, or through simulation.
2. Safety is not simply a result.
  - Just because a collision didn't occur doesn't mean an ADS actions were safe.

# Driving Thoughts

---

- Suppose you are driving down the road and you ask yourself, “If something were to happen right now and I needed to avoid it what could I do?”
- Upon reviewing your situation you arrive at the conclusion that there are four basic options you can choose from.
  - Brake up to full vehicle capability.
  - Accelerate up to full vehicle capability.
  - Steer up to full capability to the left.
  - Steer up to full capability to the right.
- After realizing these options it is next natural to ask yourself, “If I do this where will I end up?”

# Simplifying Assumptions in this prediction


---

- We are only looking a short distance into the future.
  - The same accelerations are maintained for the complete interval.
- Vehicle reaction time and jerk limits are ignored.
  - The selected acceleration is achieved from the Time=0.
- The vehicle behaves according to the defined model.
  - This is assumed to be true even for very high accelerations.


# Possible Outcomes – Full Acceleration

---

$T_0$

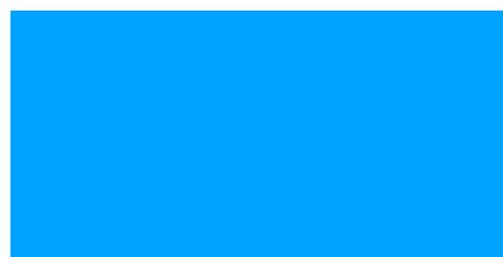

$T_0 + \Delta T$




# Possible Outcomes – Full Deceleration

---




# Possible Outcomes – Full Left

---

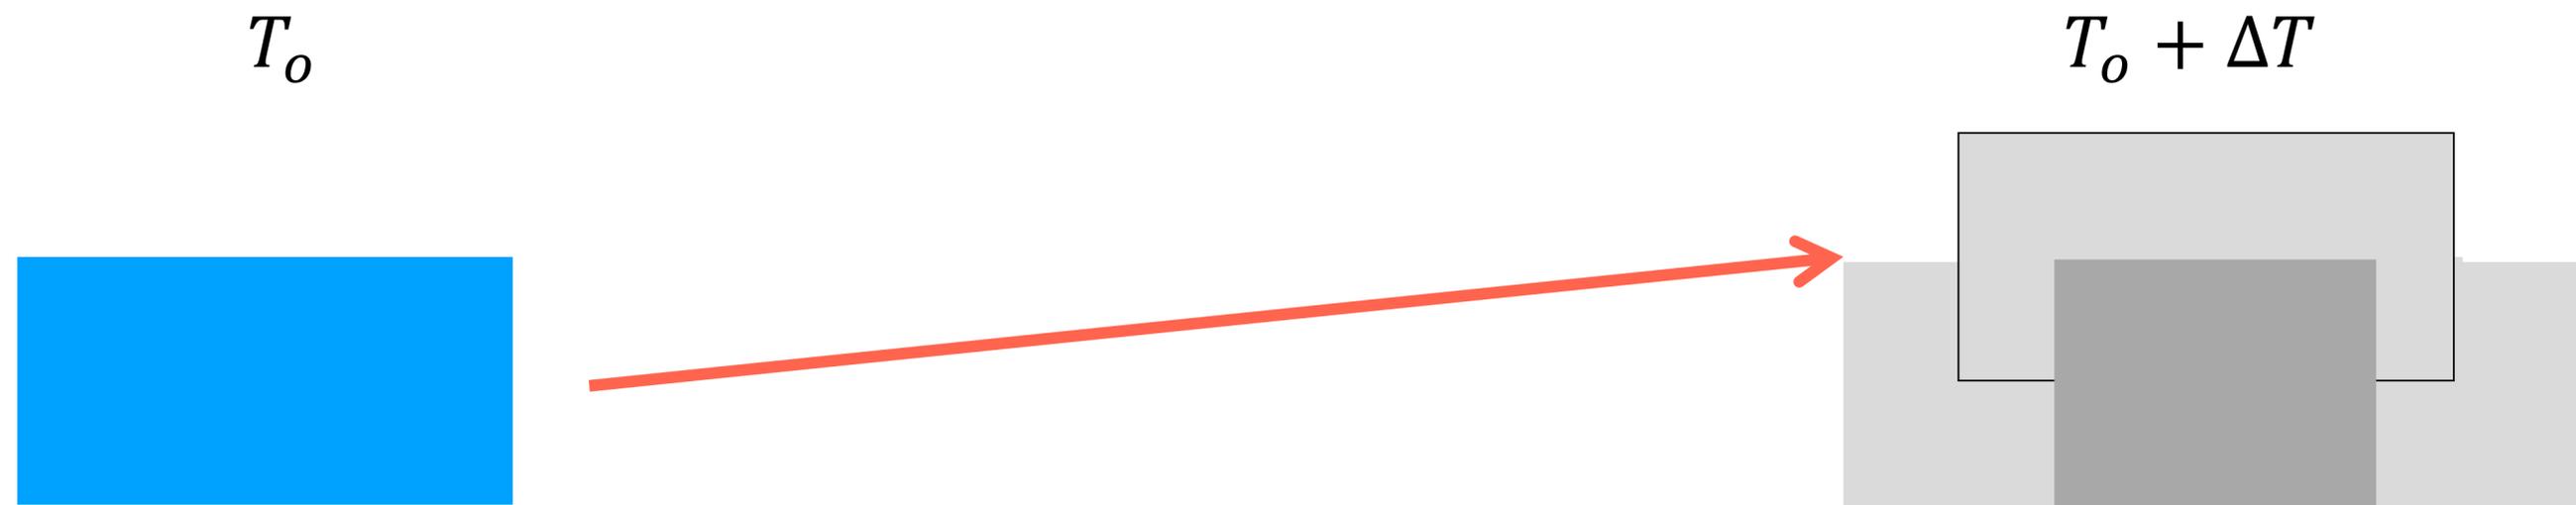


# Possible Outcomes – Full Right

---

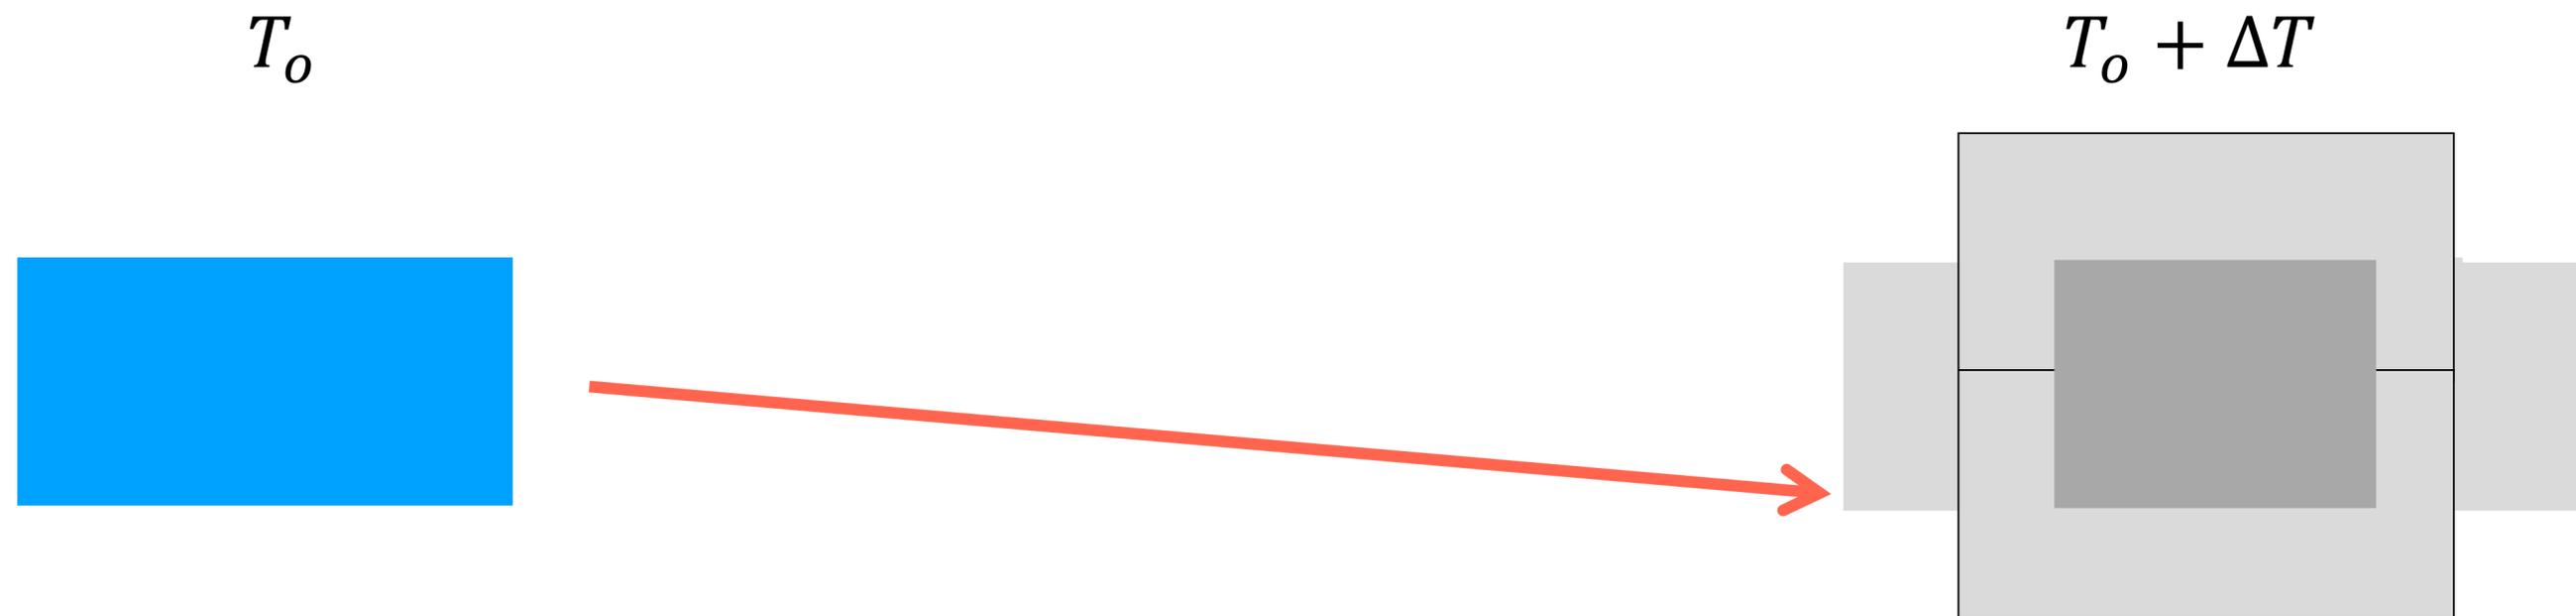


# Interesting Regions

---

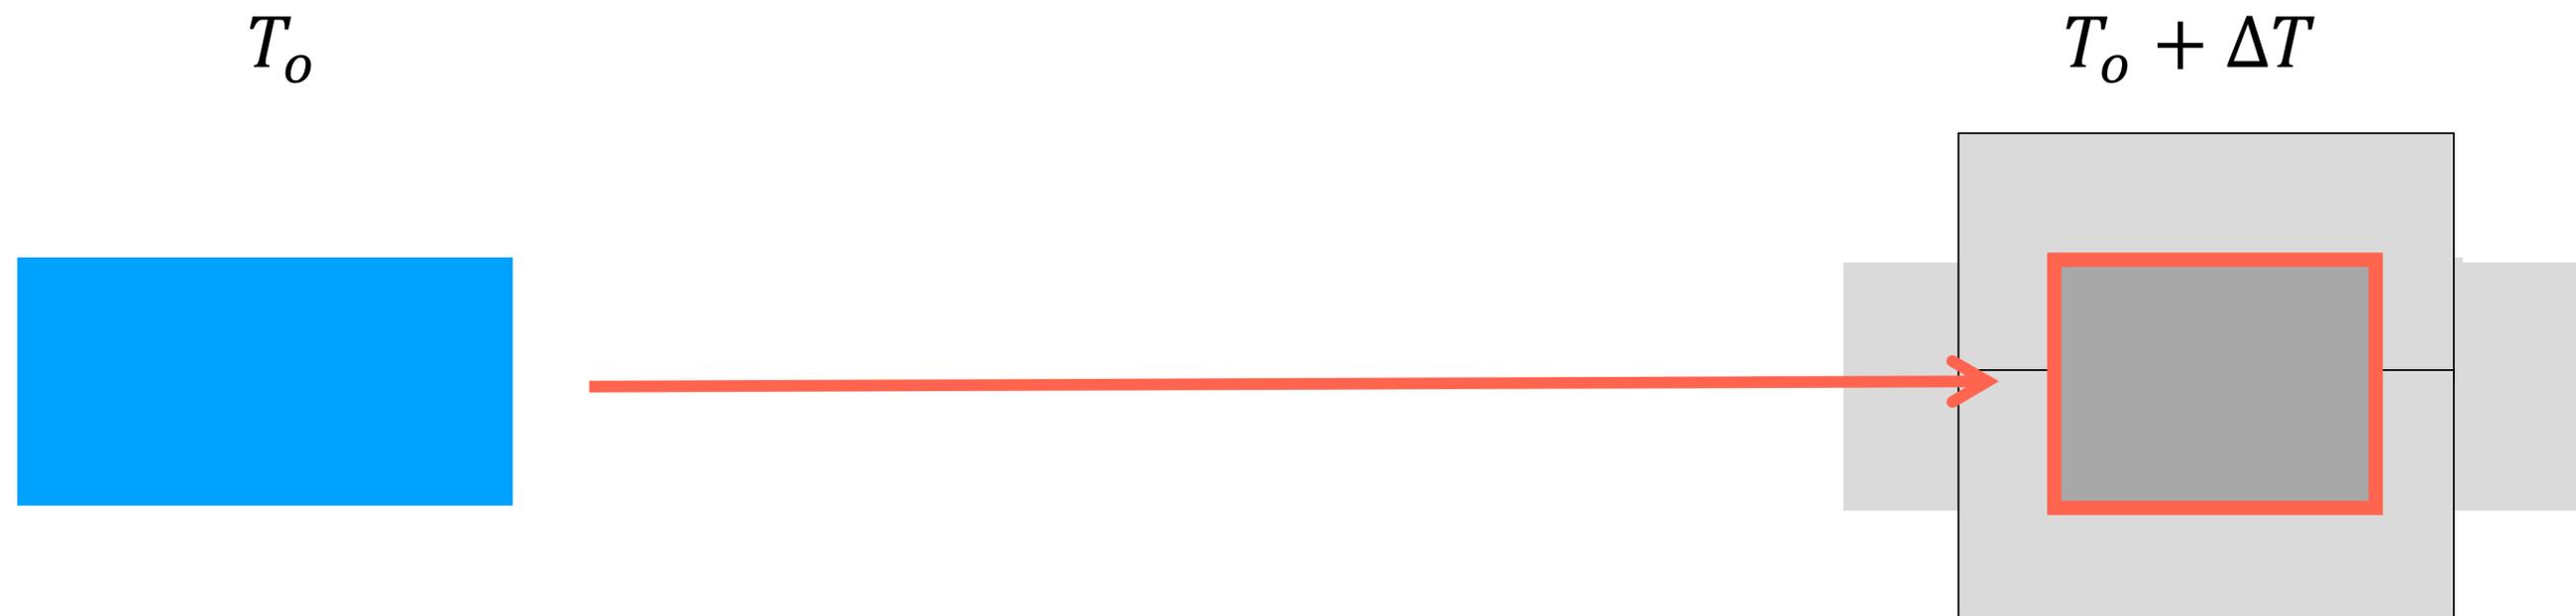


# Extension of Result to Reality

- In real situations the set of all extreme actions is not limited to these four cases.
- Applying any combination of these actions will produce a result which is related to the proportion by which these actions are pursued.
- If we look at the profiles defined by all possible combinations of actions, the facts of the previous example remain.
  - There exists a set of possible locations which the vehicle can occupy at a certain point in the future.
  - If there exists an object which intersects all of these profiles at some point in the future a collision cannot be avoided.

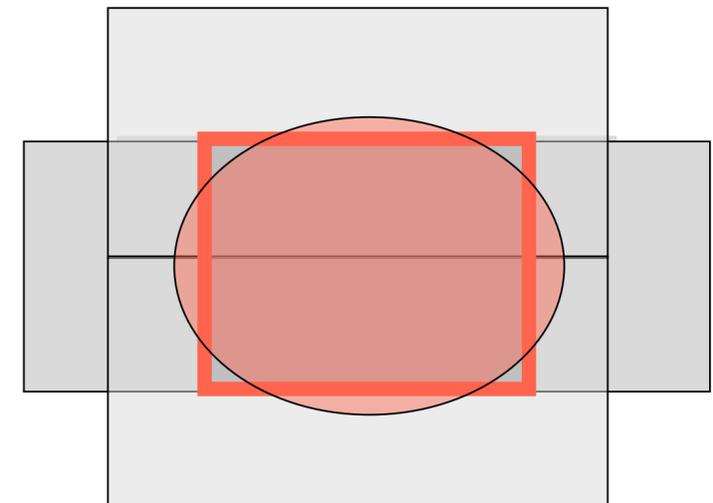

# Can We Calculate this Region of Possibility?

- The set of possible accelerations ( $A_x$  and  $A_y$ ) can be represented by an ellipse.
- Given any value of  $A_x$  there exist two corresponding values of  $A_y$ .

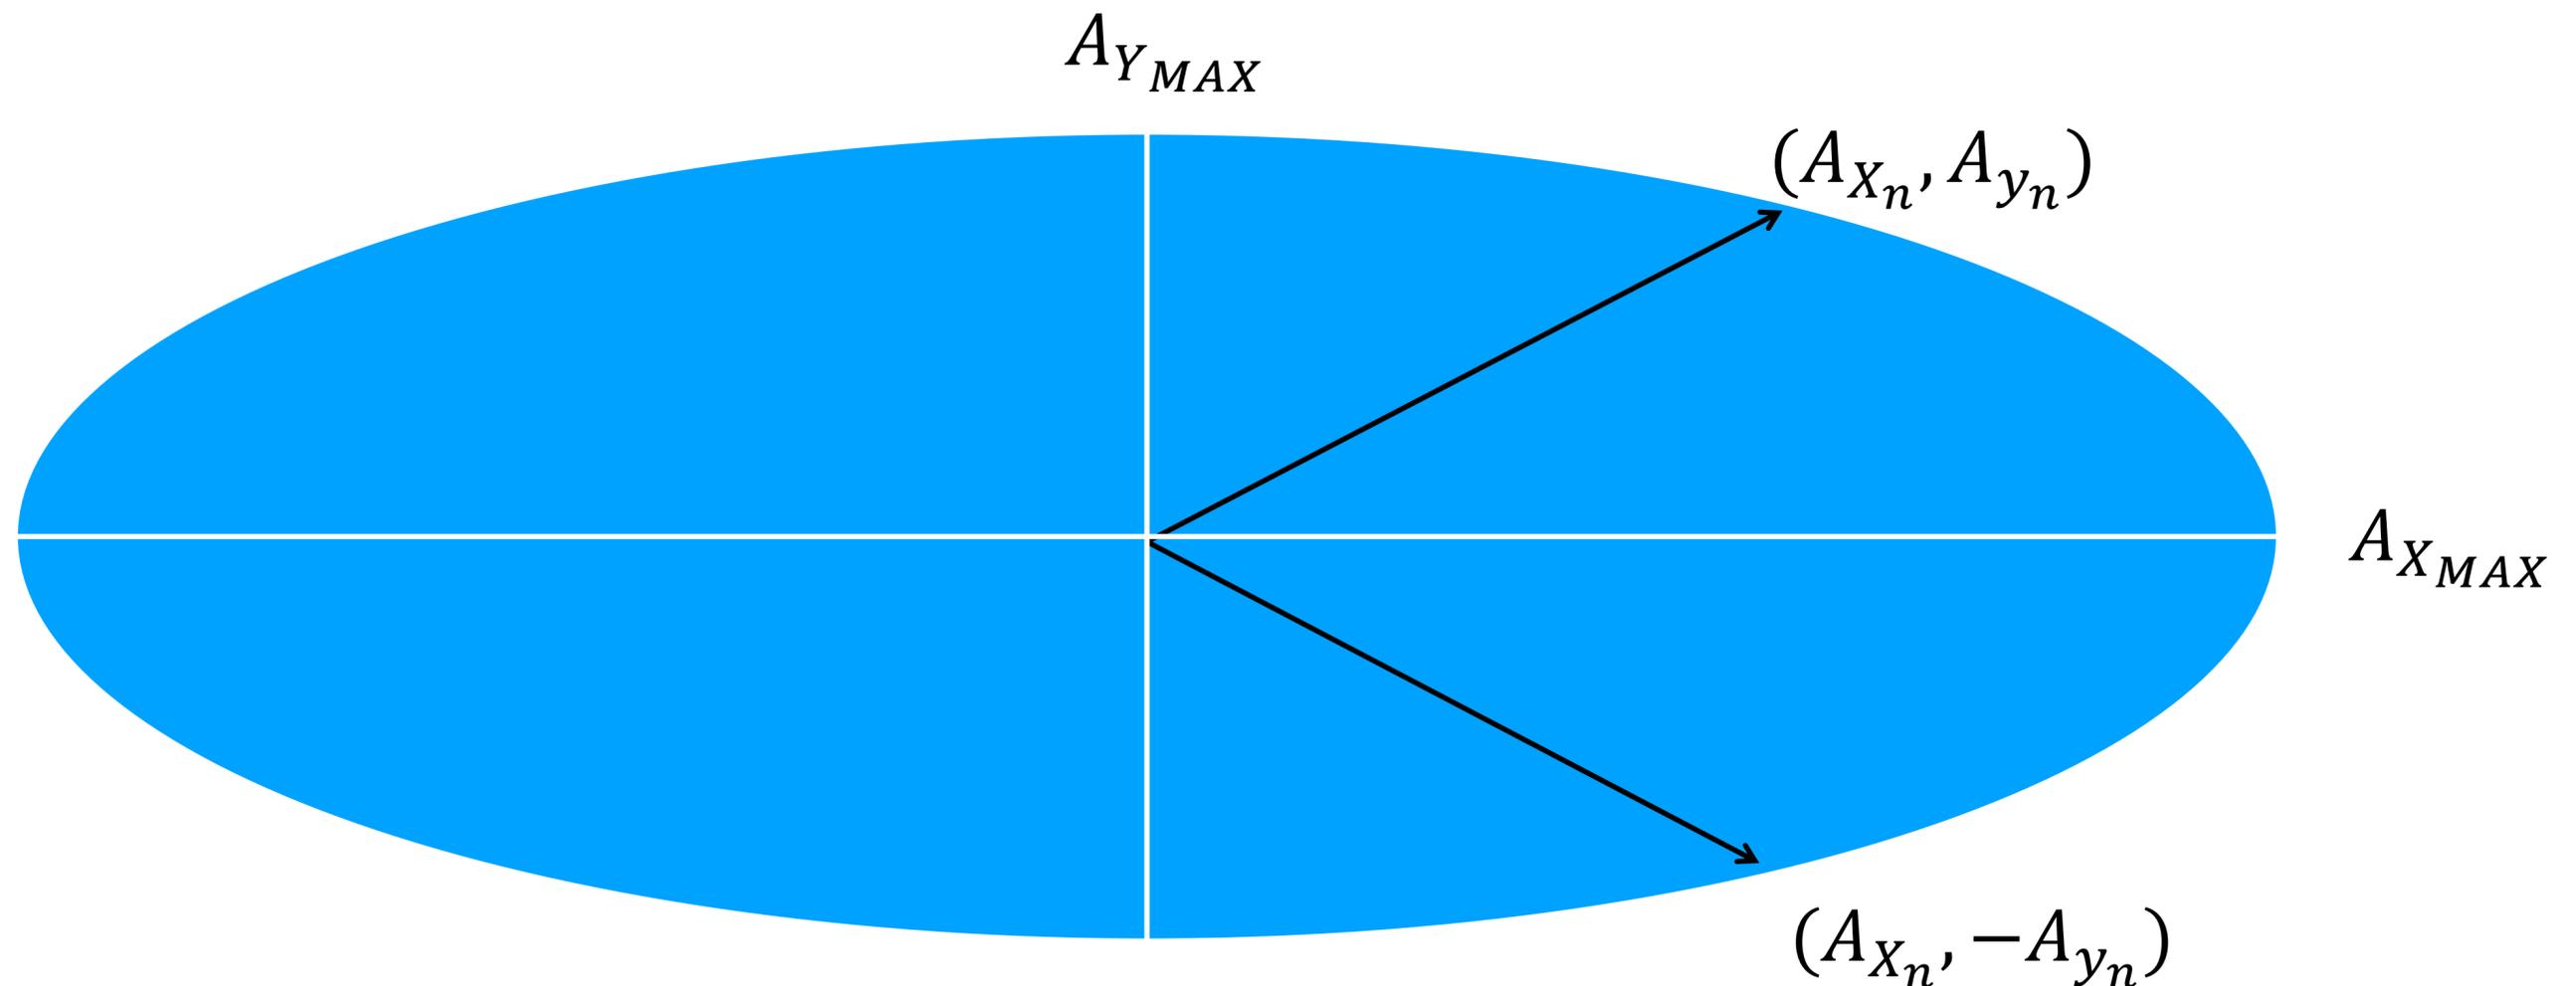

# Can We Calculate this Region of Possibility?


---

- If we use a model that can be adapted to each  $A_y, A_x$  pair we can find the position and orientation given these inputs at some point in the future (**Reachable Set**).
- The set of **profiles** is constructed by placing the vehicle's outline according to the **Reachable Set**.
- The **union** of all **profiles** is the region of space that contains all points that **may** interact with a part of the vehicle.
- The **intersection** of all **profiles** is the region of space that contains all points that **must** interact with a part of the vehicle.

# Basic Definitions Related to this Method

---



- Possible Space
  - Region of space where some part of the vehicle may exist, at a specific point in the future.

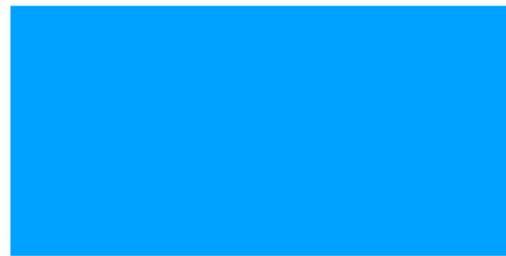

# Basic Definitions Related to this Method

---

- Unavoidable Space
  - Region of space where some part of the vehicle must exist, at a specific point in the future.

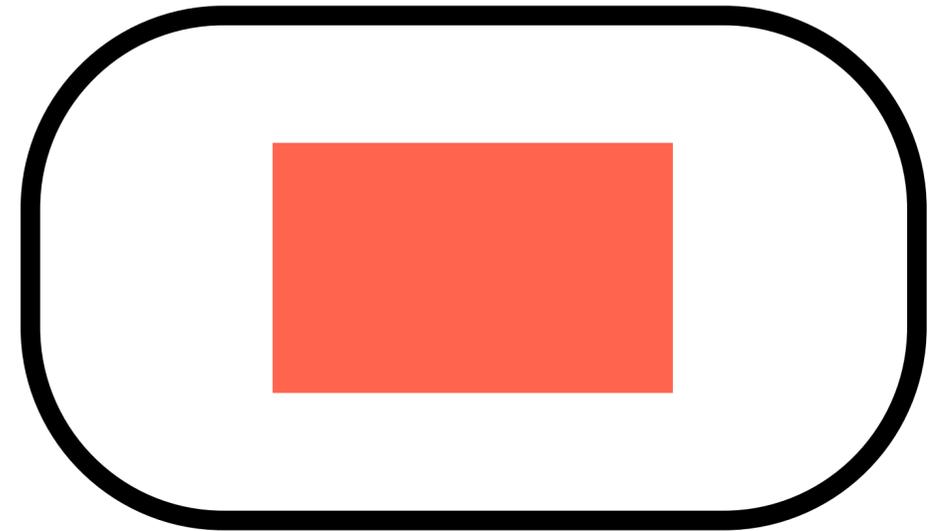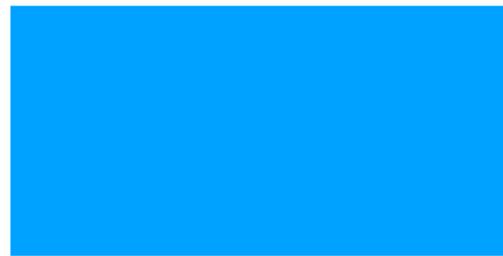


# Summary of Implementation

---

Compute all possible locations at the desired future point in time.

- A bicycle model is used to calculate positions.
- Motion is governed by either lateral acceleration or road wheel angle limits.
- Acceleration limits calculated using an ellipse defined by  $A_{X_{MAX}}$  and  $A_{Y_{MAX}}$

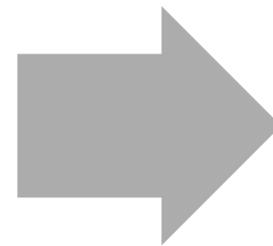

Place a rectangular representation of the vehicle at all possible points.

- Using geometric operations the possible and unavoidable space can be found.
- The possible space is the union of all rectangles
- The unavoidable space is the intersection of all rectangles.

# Interactions between possible and unavoidable spaces for multiple vehicles

---

- These spaces on their own are interesting but not particularly useful.
- By analyzing the overlap of these spaces with those from other vehicles complex traffic interactions can be analyzed.
- There are four possible combinations resulting from interaction between the possible and unavoidable spaces of two vehicles (Vehicles A & B in this case).
  1. The possible space of both vehicles overlap. (**Possible Interaction**)
  2. The unavoidable spaces of both vehicles overlap. (**Imminent Interaction**)
  3. The unavoidable space of Vehicle A overlaps the possible space of Vehicle B. (**Critical interaction for Vehicle A**)
  4. The possible space of Vehicle A overlaps the unavoidable space of Vehicle B. (**Critical Interaction for Vehicle B**)

# Possible Interactions

---

- All cases detected by finding overlap between two vehicles' possible spaces.
- Indicates that a collision between these two vehicles is possible at some point in time.
- As time  $\rightarrow \infty$  the possible space becomes infinitely large. Therefore a possible interaction occurs for all vehicles for a long enough look ahead time.

# Imminent Interaction

---

- All vehicle profiles associated with the subject vehicles reachable set intersect all members of the traffic vehicle's(s') reachable set.
- Indicates that the situation has progressed to the point where a collision is imminent.
  - Assuming that the vehicles behave according to their models a collision will occur at some point in the future.

# Critical Interactions

---

- Risk

- “A situation involving exposure to danger.” (Google)
- In this work we look to detect risk by finding situations where the occurrence (or lack) or a collision, is not longer controlled by the subject vehicle.

- Critical Interactions


- An interaction between the subject vehicle and a POV, or group of POVs, in which the POV(s) can perform an action that the subject cannot avoid.
- This type of scenario aligns with our general definition of risk in that we have limited influence on the outcome of this situation.
- Given knowledge of POV behavior the level of risk the vehicle has been exposed to can be calculated

# Steps in Detection of Critical Interactions

1. If there is no interaction between the possible space of two vehicles then an interaction cannot be critical.
  - Allow certain cases to be ruled out and saves time in detection.
2. If a POV's possible space intersects the subject's unavoidable space the interaction is critical.
  - This is a sufficient but not necessary condition for non-point objects. Therefore it only detects a subset of the desired cases but may be more computationally efficient.

# Detection of Critical Interactions (cont.)

- Detect if there exists a POV profile (or set of profiles for multiple POVs) that intersects profiles for all subject vehicle actions.
  - An efficient algorithm is currently being developed to address these cases.

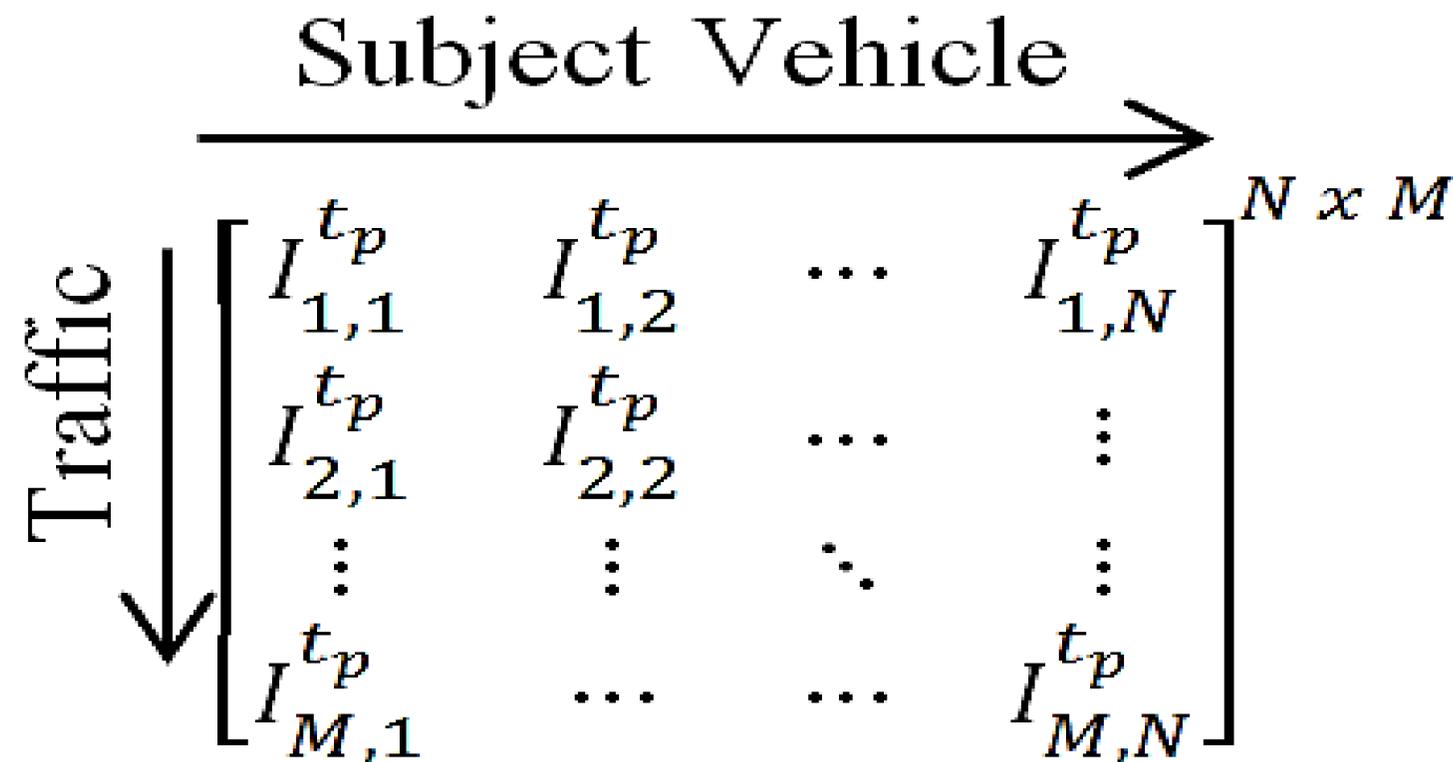

# Method Flow Diagram

---

## Acceleration Map

- Provides a set of  $(A_x, A_y)$  pairs achievable by the vehicle which will be used for vehicle position calculations.

## Vehicle Modeling

- Utilizes the desired acceleration pairs along with vehicle size parameters to calculate possible vehicle trajectories.

## Interaction Classification

- Tests the set of profiles from the prior step to determine the current interaction classification.

## Severity Analysis

- Reviews possible, critical and imminent interactions to quantify their severity.

# Concluding Remarks

---

- A framework for evaluating vehicle ADS Performance, proving ground and real world environments has been created.
- This method focuses on identifying situations in which the automation system has placed the vehicle in a position where the actions of other drivers are governing the outcome.
- The approach to constructing this framework allows various pieces to be changed without the complete method needing revised.
- Going forward this method can be utilized to compare various automation systems as they become available in a wide variety of situations and environments.