Inevitable Changes in Measurements:
redefining what we mean by “fit-for-purpose”

Thomas J. Bruno

Physical and Chemical Properties Division

National Institute of Standards and Technology

Boulder, CO

Fit-for-Purpose:

- A capstone of QA principles
  - product should be suitable for the intended purpose

Fit-for-Purpose:

- A capstone of QA principles
  - product should be suitable for the intended purpose
    - fulfilling a customer’s requirements, needs or desires
    - whether or not a unit meets quality
    - resources should not be squandered to produce higher quality than is necessary
    - conform to generally accepted standards (accreditation or quality assurance body)
    - "in spec" or "out of spec"

Fit-for-Purpose:

- A capstone of QA principles
  - product should be suitable for the intended purpose
    - Specifications
    - Properties

Fit-for-Purpose:

- A capstone of QA principles
  - product should be suitable for the intended purpose
    - Specifications
      - Test methods and procedures
      - Rubrics, for comparison
    - Properties

Fit-for-Purpose:

- A capstone of QA principles
  - product should be suitable for the intended purpose
    - Specifications
      - Test methods and procedures
      - Rubrics, for comparison
    - Properties
      - Often very empirical
      - Cost, simplicity driven

Fit-for-Purpose:

- A capstone of QA principles
  - product should be suitable for the intended purpose
    - Specifications
      - Test methods and procedures
      - Rubrics, for comparison
    - Properties
      - Often very empirical
      - Cost, simplicity driven
- Development driven by what can be measured

An Alternative:

- Fundamental Properties, rather than “fit-for-purpose” properties

An Alternative:

- Fundamental Properties, rather than “fit-for-purpose” properties
  - Fundamental properties are linked to fundamental theory
    - Math ⟺ Measurement

An Alternative:

- Fundamental Properties, rather than “fit-for-purpose” properties
  - Fundamental properties are linked to fundamental theory
    - Math ⟺ Measurement
  - Fundamental properties derive from atoms and molecules
    - Explicit recognition that composition determines property

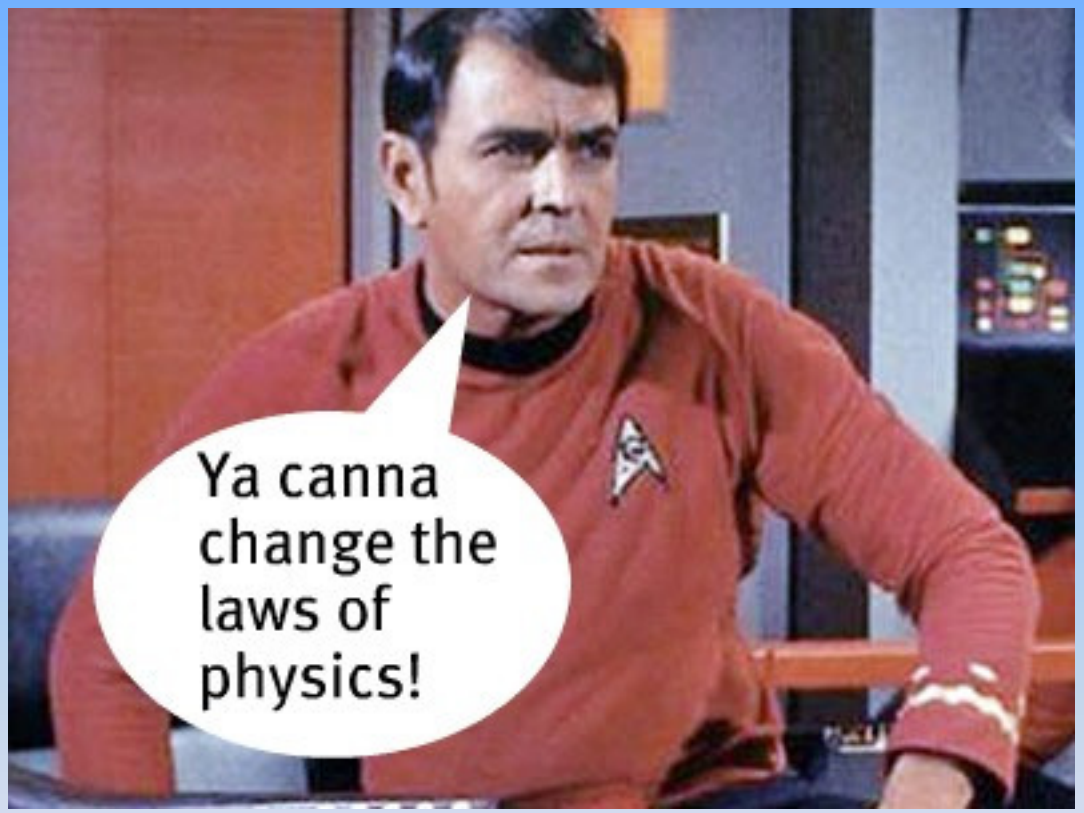
Ya canna change the laws of physics!

Fuel Test Methods:

- Volatility
- Vapor Pressure
- Cetane index
- Antiknock index
- Gravity
- Acidity
- Color
- etc., etc….

At the top of the list for good reasons!

Distillation Curve???

- For a complex mixture, it is a plot of the distillation temperature against cut fraction
  - T *vs*. Vol
  - T *vs*. 100 mL Volume
  - T *vs*. Volume %

    (sometimes expressed as % evaporated)

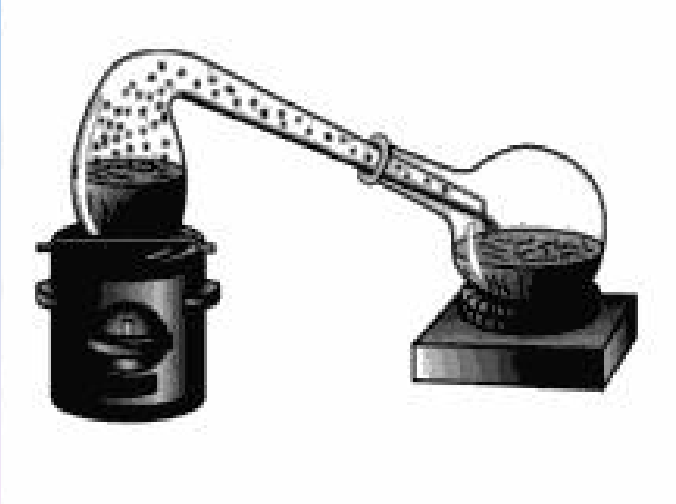

Standard Test Method for Distillation of Petroleum Products at Atmospheric Pressure[1]

This standard is issued under the fixed designation D 86; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

This specification has been approved for use by agencies of the Department of Defense.

1. Scope[2]

1.1 This test method covers the atmospheric distillation of petroleum products using a laboratory batch distillation unit to determine quantitatively the boiling range characteristics of such products as natural gasolines, light and middle distillates, automotive spark-ignition engine fuels, aviation gasolines, aviation turbine fuels, 1-D and 2-D regular and low sulfur diesel fuels, special petroleum spirits, naphthas, white spirits, kerosines, and Grades 1 and 2 burner fuels.

1.2 The test method is designed for the analysis of distillate fuels; it is not applicable to products containing appreciable quantities of residual material.

1.3 This test method covers both manual and automated instruments. In cases of dispute, the manual apparatus and procedure shall be the referee test method.

1.4 Unless otherwise noted, the values stated in SI units are to be regarded as the standard. The values given in parentheses are provided for information only.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 All standards are subject to revision, and parties to agreement on this test method are to apply the most recent edition of the standards indicated below, unless otherwise specified, such as in contractual agreements or regulatory rules, where earlier versions of the method(s) identified may be required.

2.2 *ASTM Standards:*

D 97 Test Method for Pour Point of Petroleum[3]

D 323 Test Method for Vapor Pressure of Petroleum Products (Reid Method)[3]

D 850 Test Method for Distillation of Industrial Aromatic Hydrocarbons and Related Materials[4]

D 1078 Test Method for Distillation Range of Volatile Organic Liquids[4]

D 2892 Test Method for Distillation of Crude Petroleum (15-Theoretical Plate Column)[5]

D 4057 Practice for Manual Sampling of Petroleum and Petroleum Products[5]

D 4177 Practice for Automatic Sampling of Petroleum and Petroleum Products[5]

D 4953 Test Method for Vapor Pressure of Gasoline and Gasoline Oxygenate Blends (Dry Method)[6]

D 5190 Test Method for Vapor Pressure of Petroleum Products (Automatic Method)[6]

D 5191 Test Method for Vapor Pressure of Petroleum Products (Mini Method)[6]

D 5482 Test Method for Vapor Pressure of Petroleum Products (Mini Method-Atmospheric)[6]

D 5949 Test Method for Pour Point of Petroleum Products (Automatic Pressure Pulsing Method)[6]

D 5950 Test Method for Pour Point of Petroleum Products (Automatic Tilt Method)[6]

D 5985 Test Method for Pour Point of Petroleum Products (Rotational Method)[6]

E 1 Specification for ASTM Thermometers[7]

E 77 Test Method for Inspection and Verification of Thermometers[7]

E 1272 Specification for Laboratory Glass Graduated Cylinders[8]

E 1405 Specification for Laboratory Glass Distillation Flasks[8]

2.3 *IP Standards:*[9]

IP 69 Determination of Vapour Pressure—Reid Method

IP 123 Petroleum Products—Determination of Distillation Characteristics

IP 394 Determination of Air Saturated Vapour Pressure

IP Standard Methods for Analysis and Testing of Petroleum and Related Products 1996—Appendix A

3. Terminology

3.1 *Definitions:*

3.1.1 *charge volume, n*—the volume of the specimen, 100 mL, charged to the distillation flask at the temperature specified in Table 3.

3.1.2 *decomposition, n—of a hydrocarbon*, the pyrolysis or cracking of a molecule yielding smaller molecules with lower boiling points than the original molecule.

3.1.2.1 *decomposition point, n*—the corrected thermom-

---

[1] This test method is under the jurisdiction of ASTM Committee D-2 on Petroleum Products and Lubricants and is the direct responsibility of Subcommittee D02.08 on Volatility.

In the IP, the equivalent test method is published under the designation IP 123. It is under the jurisdiction of the Standardization Committee.

Current edition approved Nov. 10, 1997. Published February 1998.

[2] This test method is a complete rewrite of D 86 – 96.

[3] *Annual Book of ASTM Standards*, Vol 05.01.

[4] *Annual Book of ASTM Standards*, Vol 06.04.

[5] *Annual Book of ASTM Standards*, Vol 05.02.

[6] *Annual Book of ASTM Standards*, Vol 05.03.

[7] *Annual Book of ASTM Standards*, Vol 14.03.

[8] *Annual Book of ASTM Standards*, Vol 14.02.

[9] Available from the Institute of Petroleum, 61 New Cavendish St., London, W1M 8AR, UK.

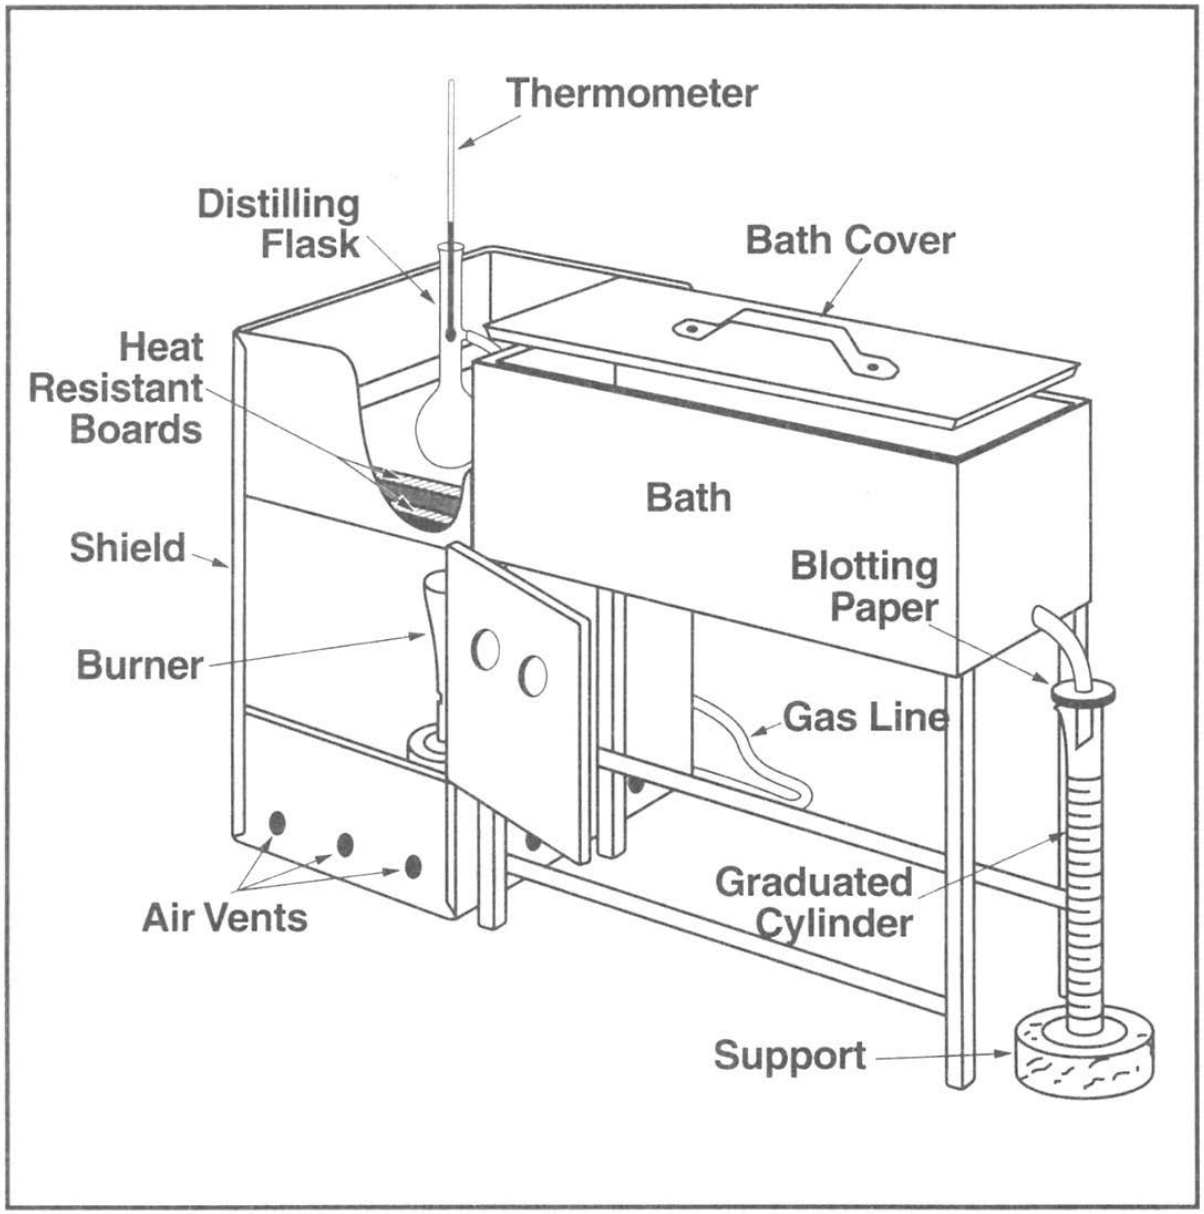
Thermometer
Distilling Flask
Bath Cover
Heat Resistant Boards
Bath
Shield
Blotting Paper
Burner
Gas Line
Air Vents
Graduated Cylinder
Support

ADC Analytical Protocol for Complex Fluids:

- temperatures are **true thermodynamic state points**
- **consistent** with a century of historical data
- temperature, volume and pressure measurements of **low uncertainty** – **EOS development**
- composition explicit data channel for **qualitative, quantitative and trace analysis** of fractions
- Explicit identification of **azeotropes**
- **energy content** of each fraction
- **corrosivity** of each fraction
- **greenhouse** gas output of each fraction
- thermal and oxidative **stability** of the fluids

Advanced Distillation Curve (ADC) Apparatus

Sampling adapter designed to allow instantaneous sampling of distillate (~70 mL) for analysis

Twin the (~70 mL) fdes – T1 meas. kettle temp , T2 meas. head temp

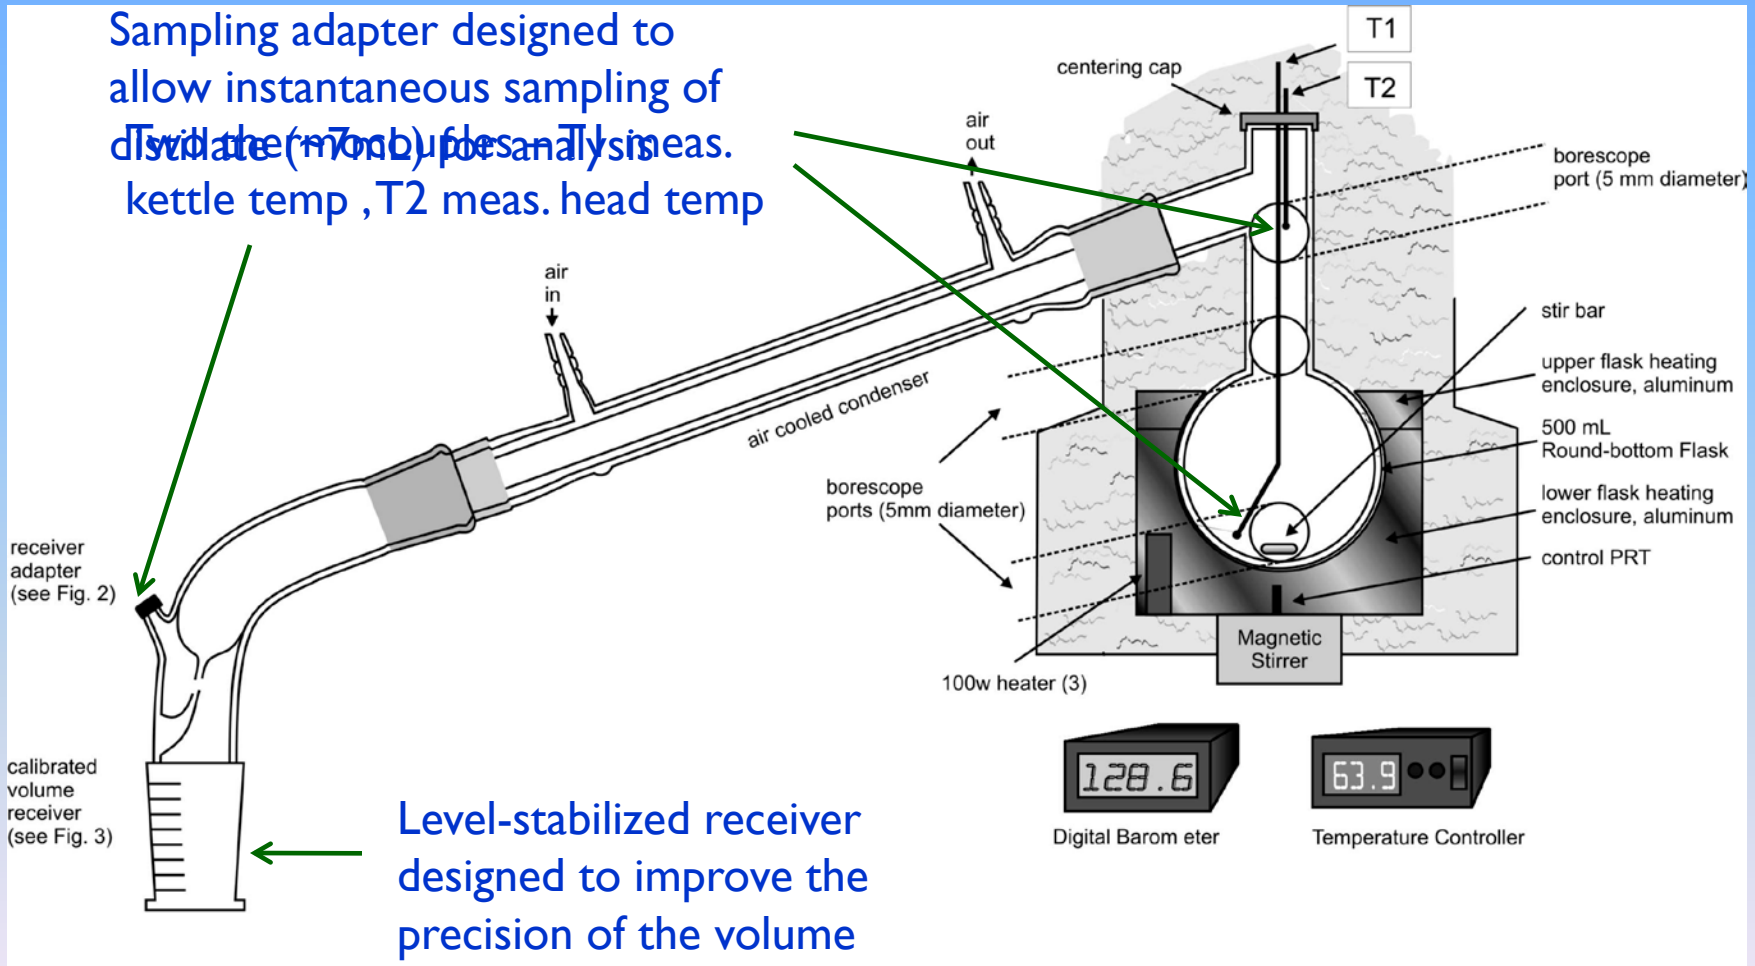

Level-stabilized receiver designed to improve the precision of the volume measurement

Sampling Adapter & Level Stabilized Receiver

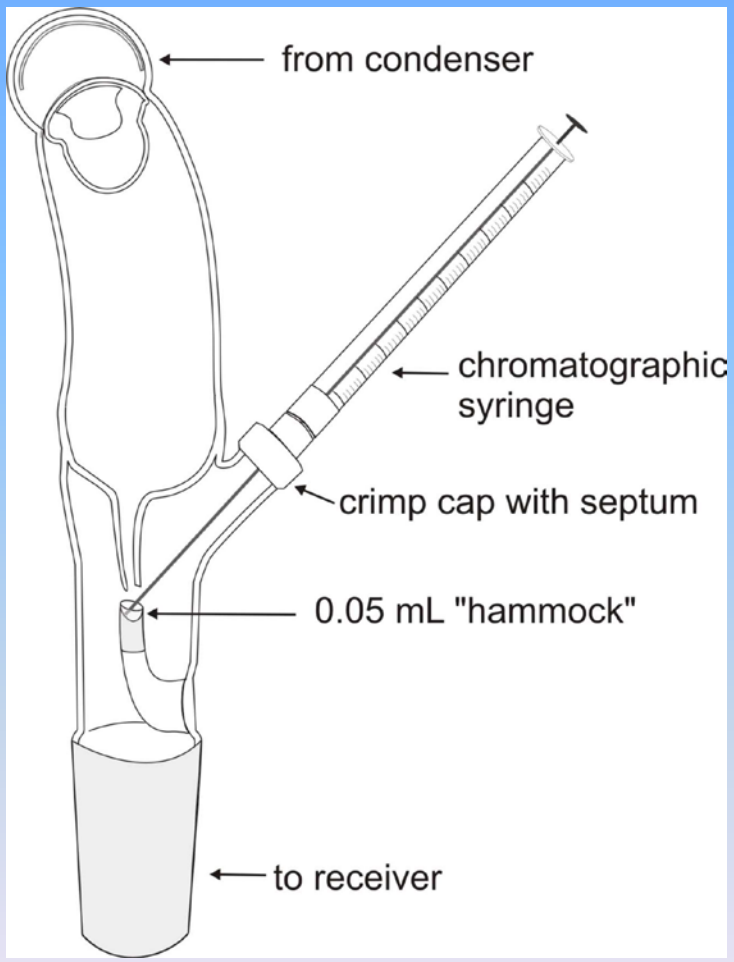

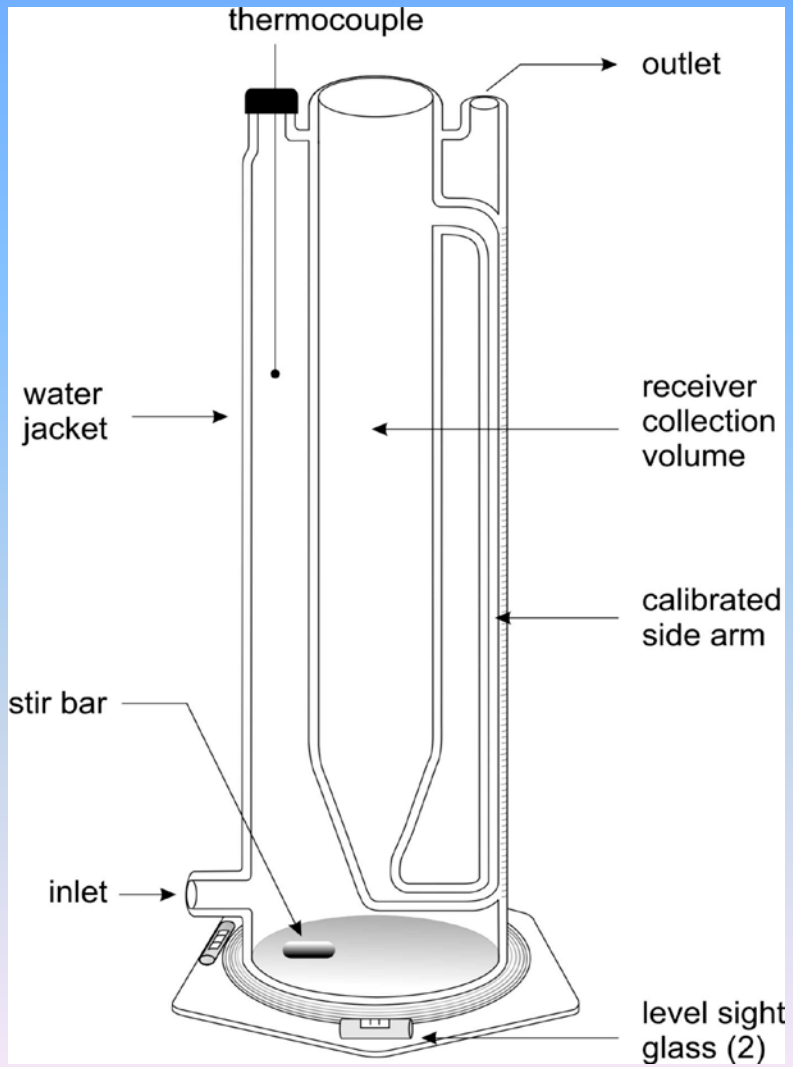

Commercialized by Sigma Aldrich

Choosing a Biodiesel Fuel Feedstock

- Grown locally
  - geography
  - climate
  - availability
- Feedstock oil determines
  - fatty acid content
  - FAME profile (composition and degree of unsaturation)
  - resulting properties of the biodiesel fuel
    - cold flow properties
    - oxidative stability
    - energy content

Triglyceride

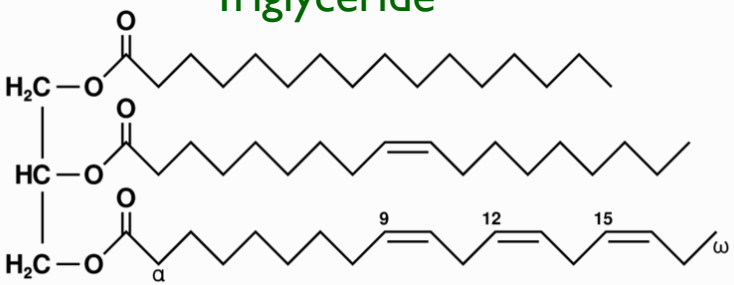

Soy Based Biodiesel Fuel:

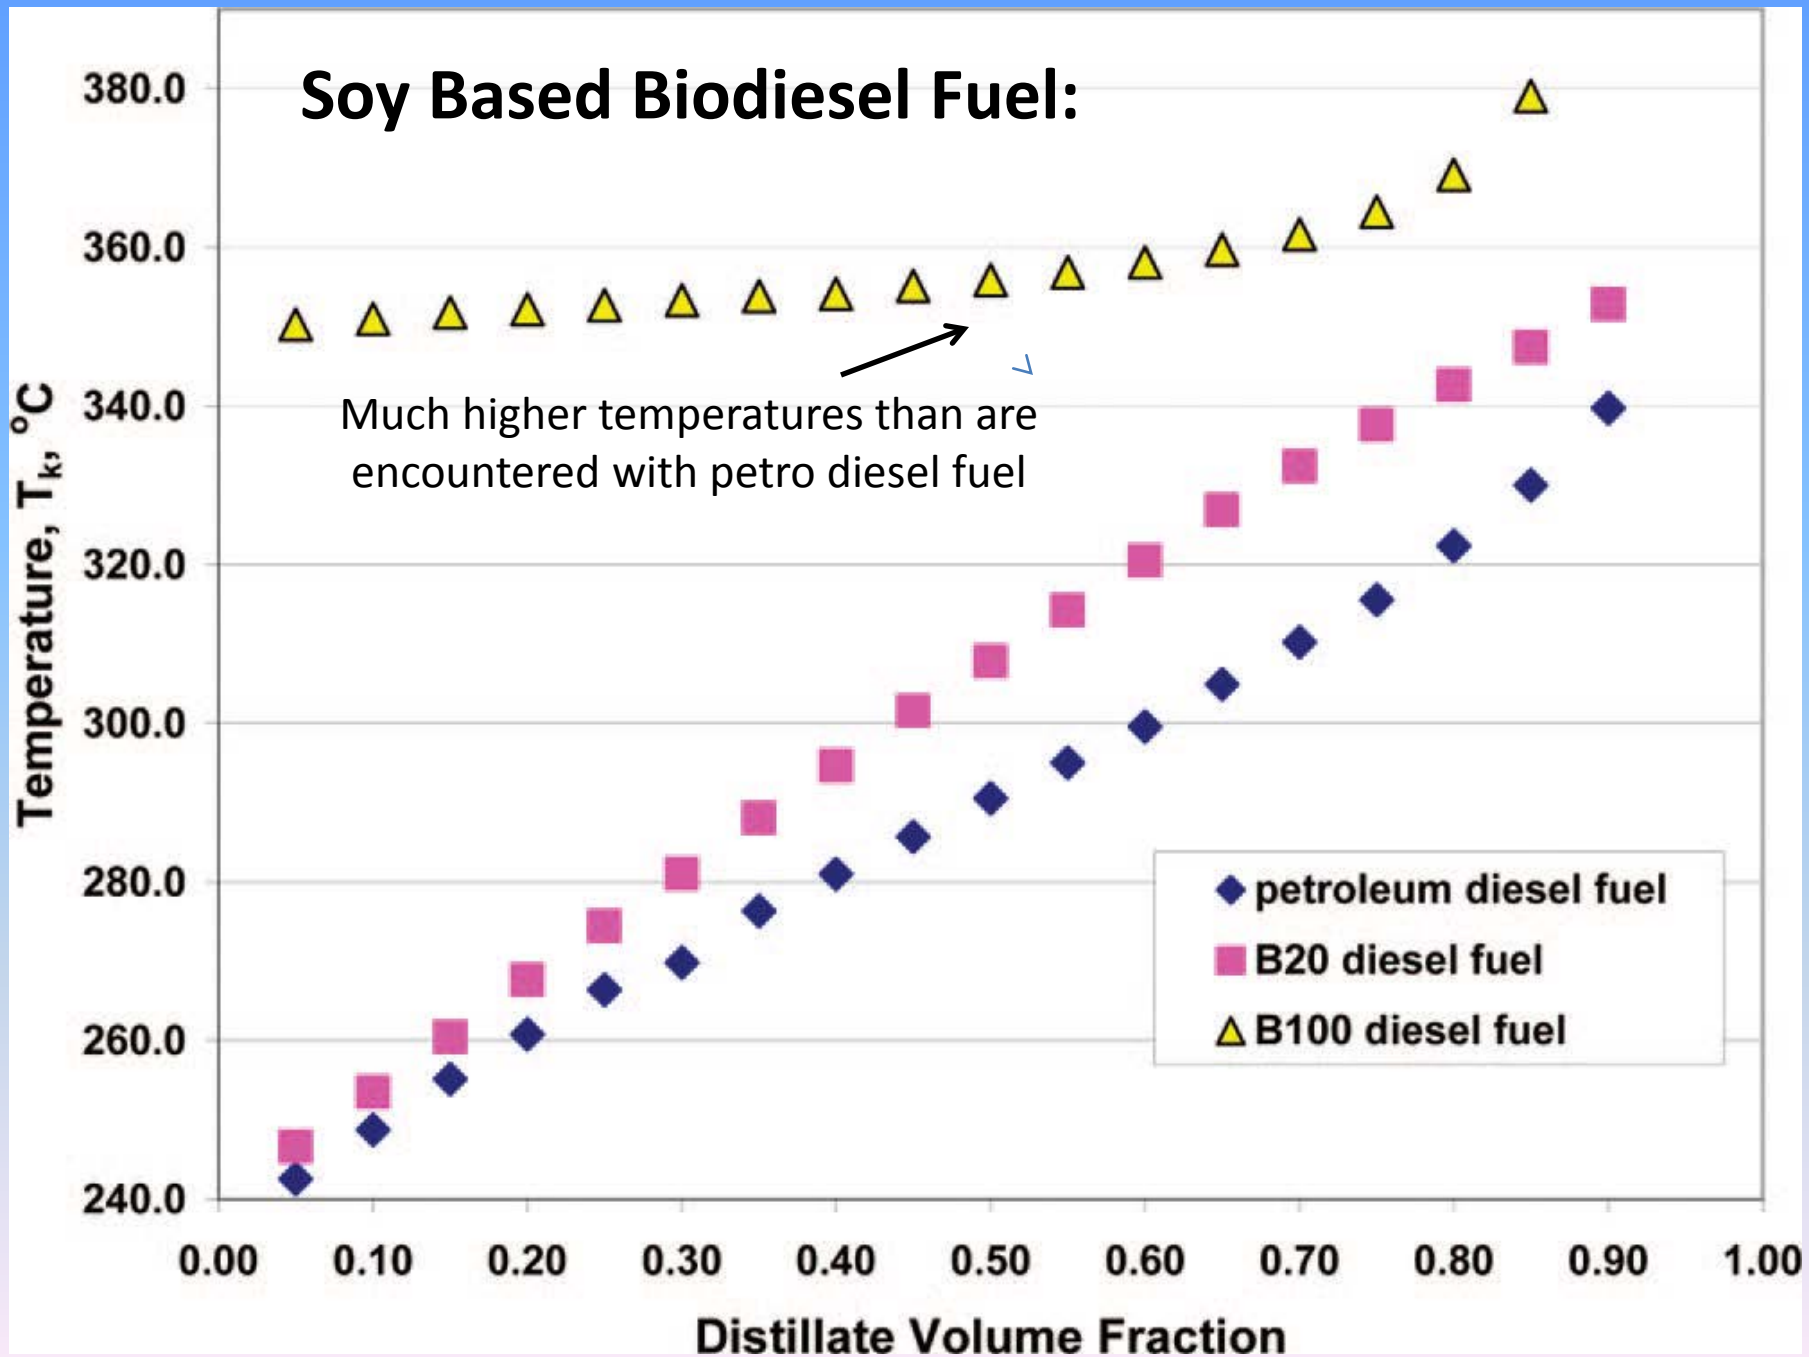

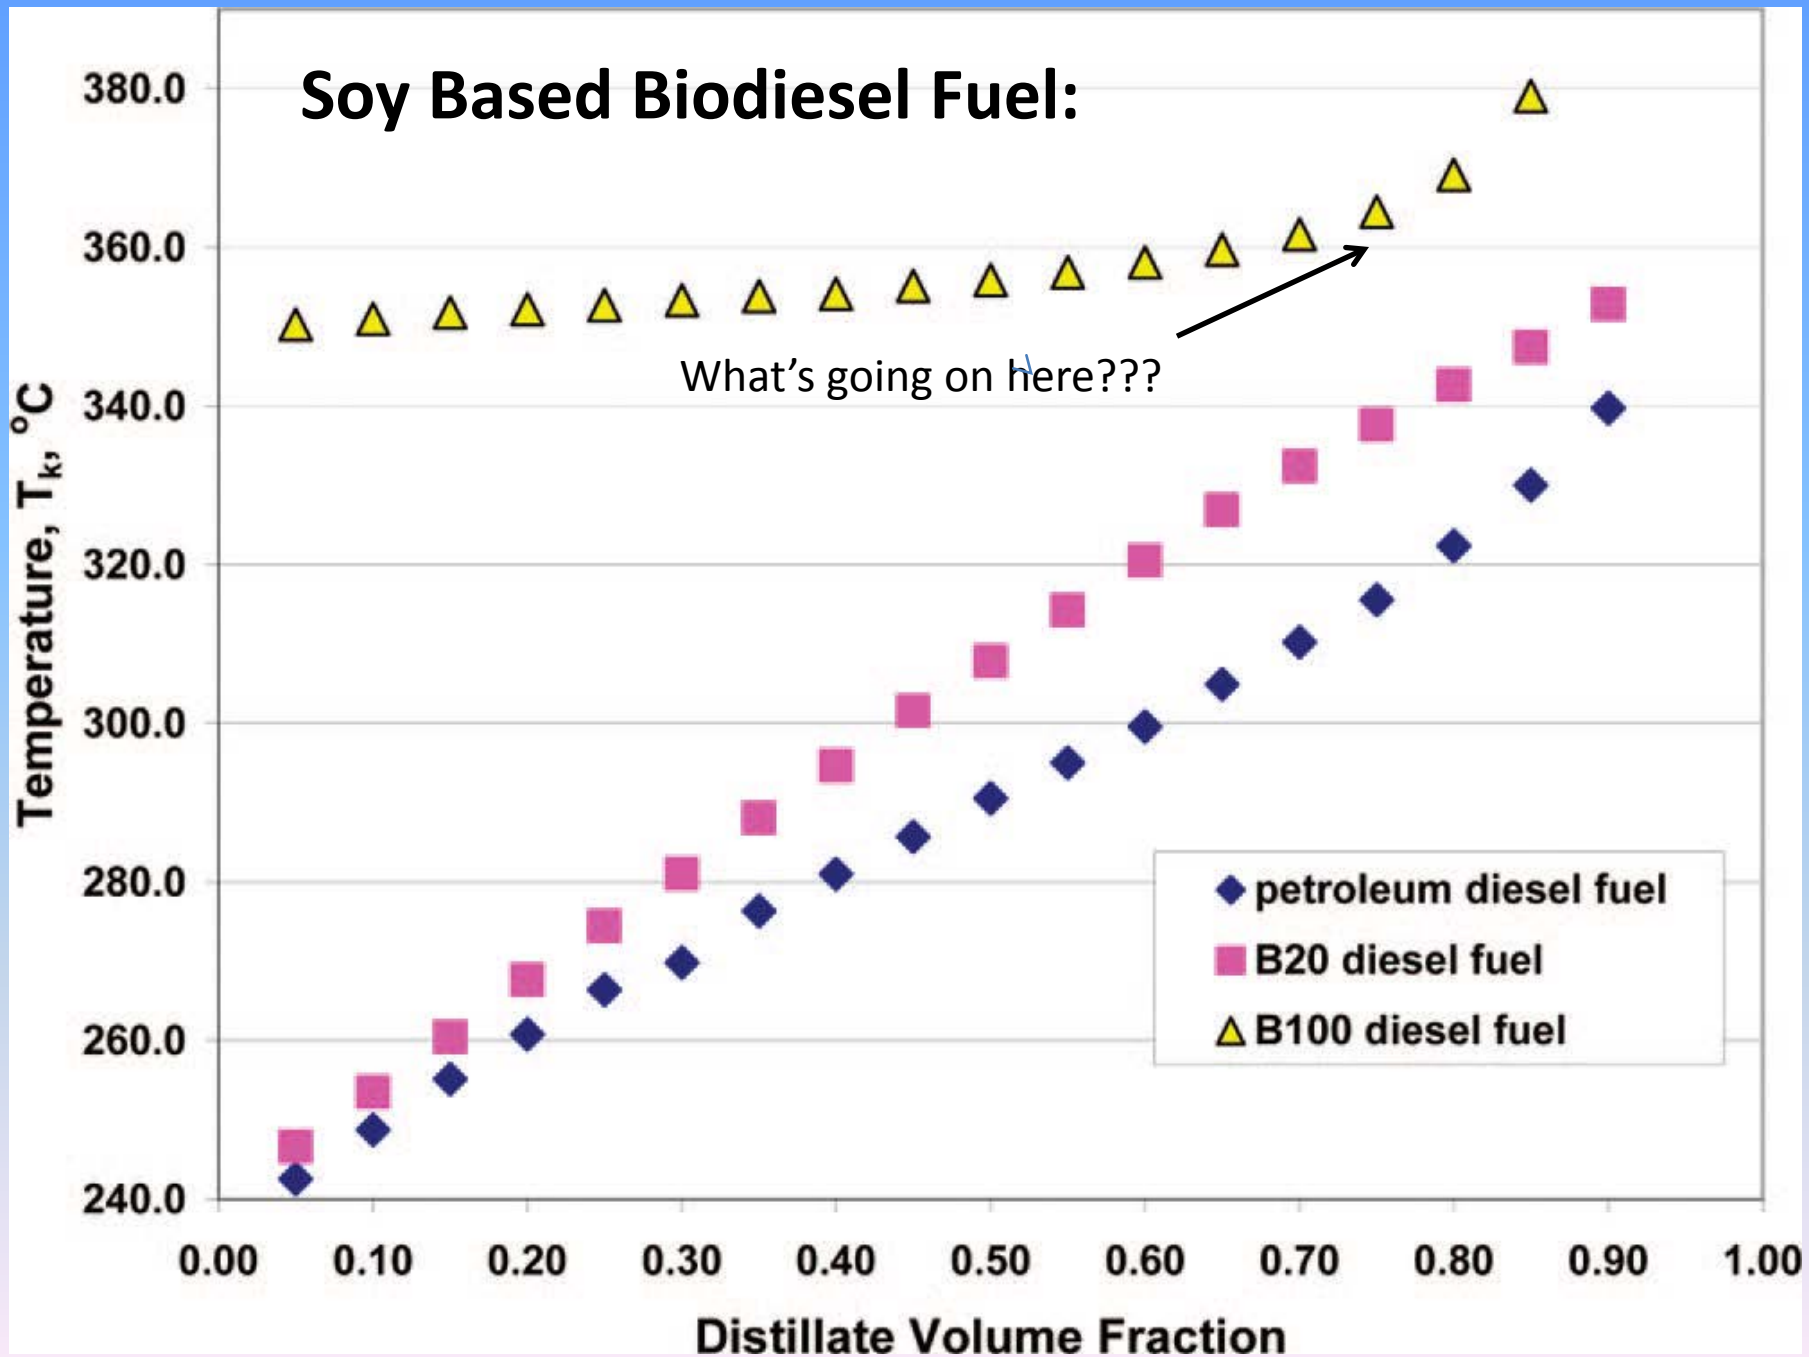
Soy Based Biodiesel Fuel:
What's going on here???
Temperature, T_k, °C
380.0
360.0
340.0
320.0
300.0
280.0
260.0
240.0
0.00
0.10
0.20
0.30
0.40
0.50
0.60
0.70
0.80
0.90
1.00
Distillate Volume Fraction
petroleum diesel fuel
B20 diesel fuel
B100 diesel fuel

Use the composition explicit data channel to find out

Diels Alder products forming

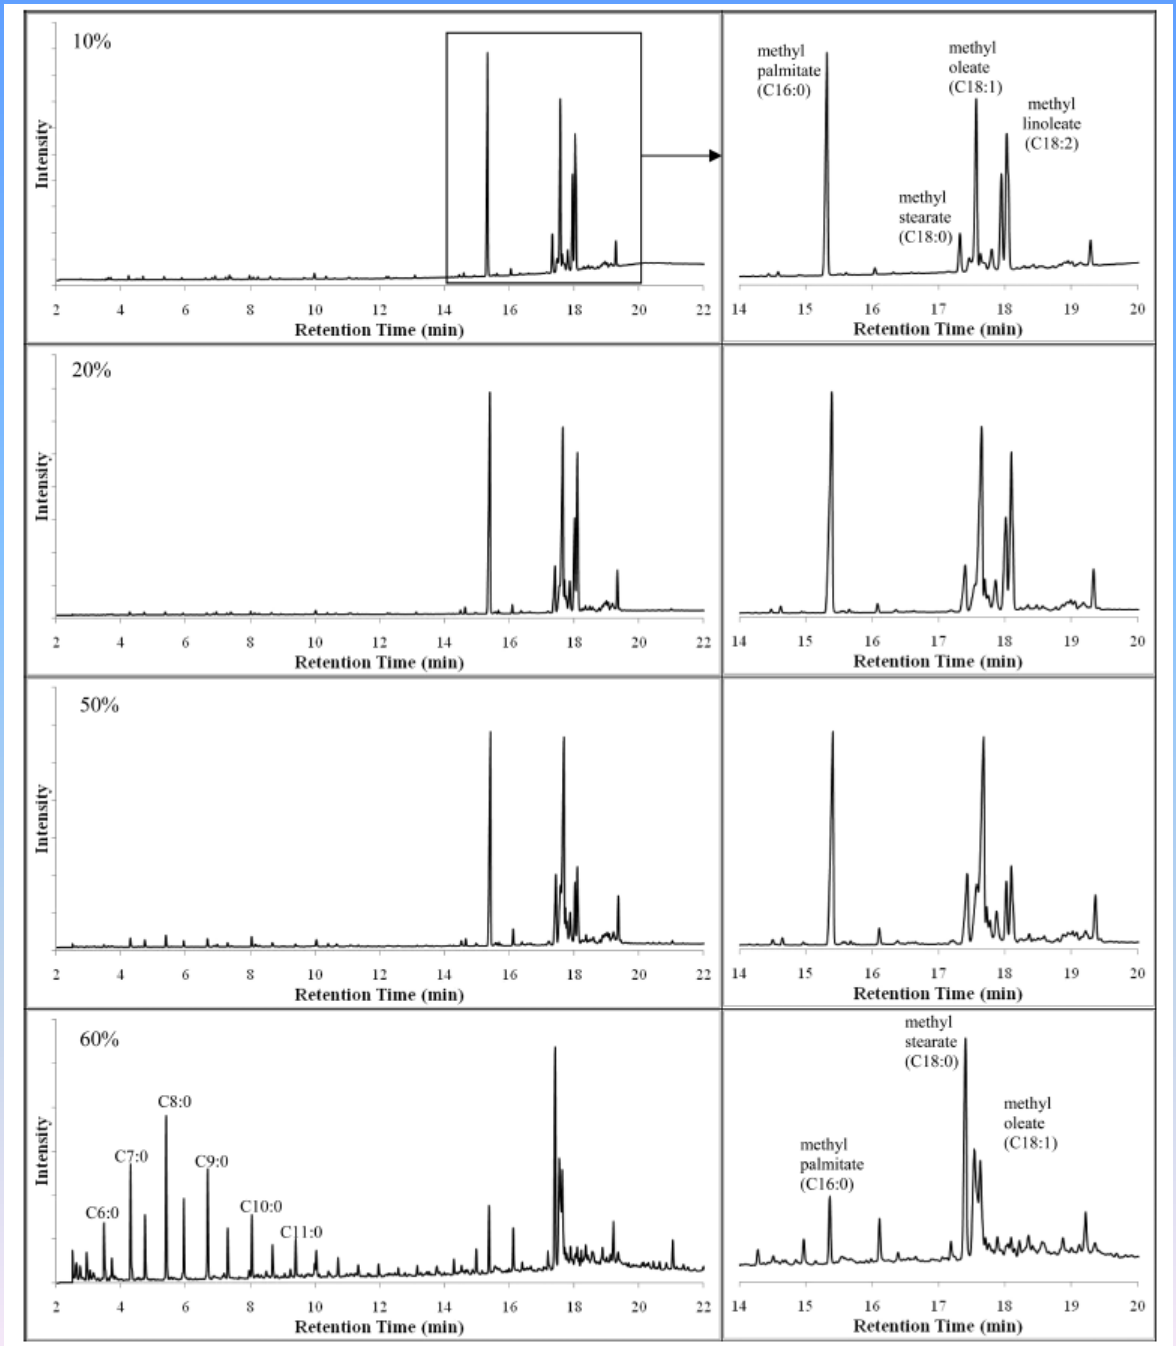

Use the composition explicit data channel to find out

Diels Alder products forming

Cracking products and lots of Diels Alder products

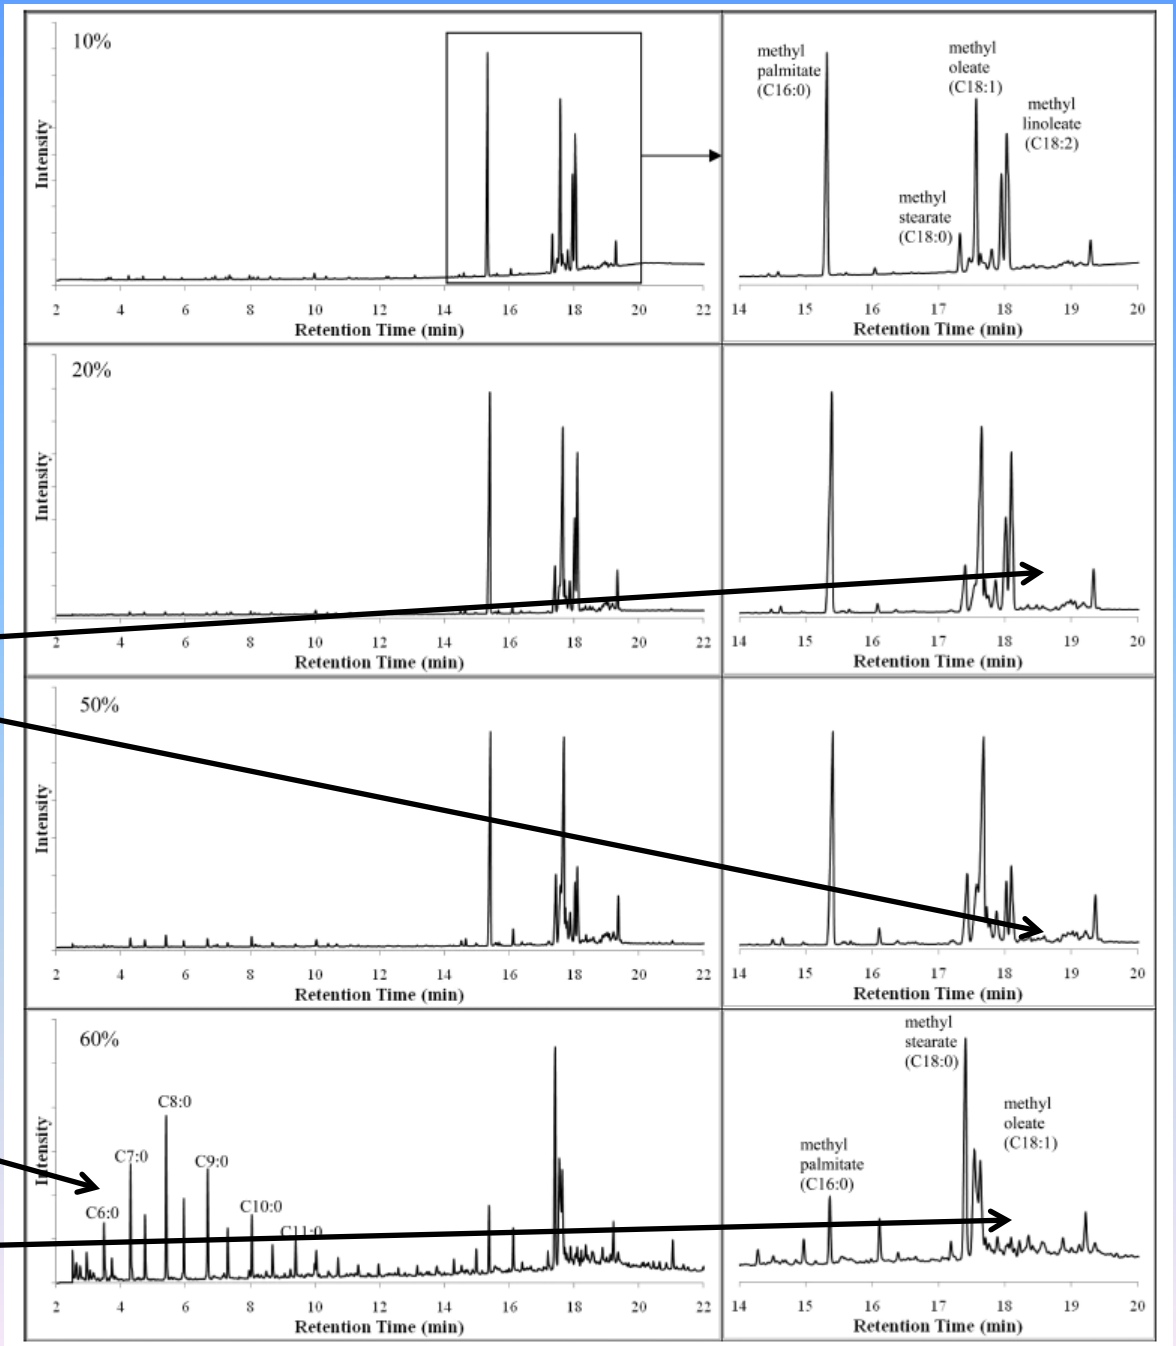

Lower the Pressure, Lower the Temperature

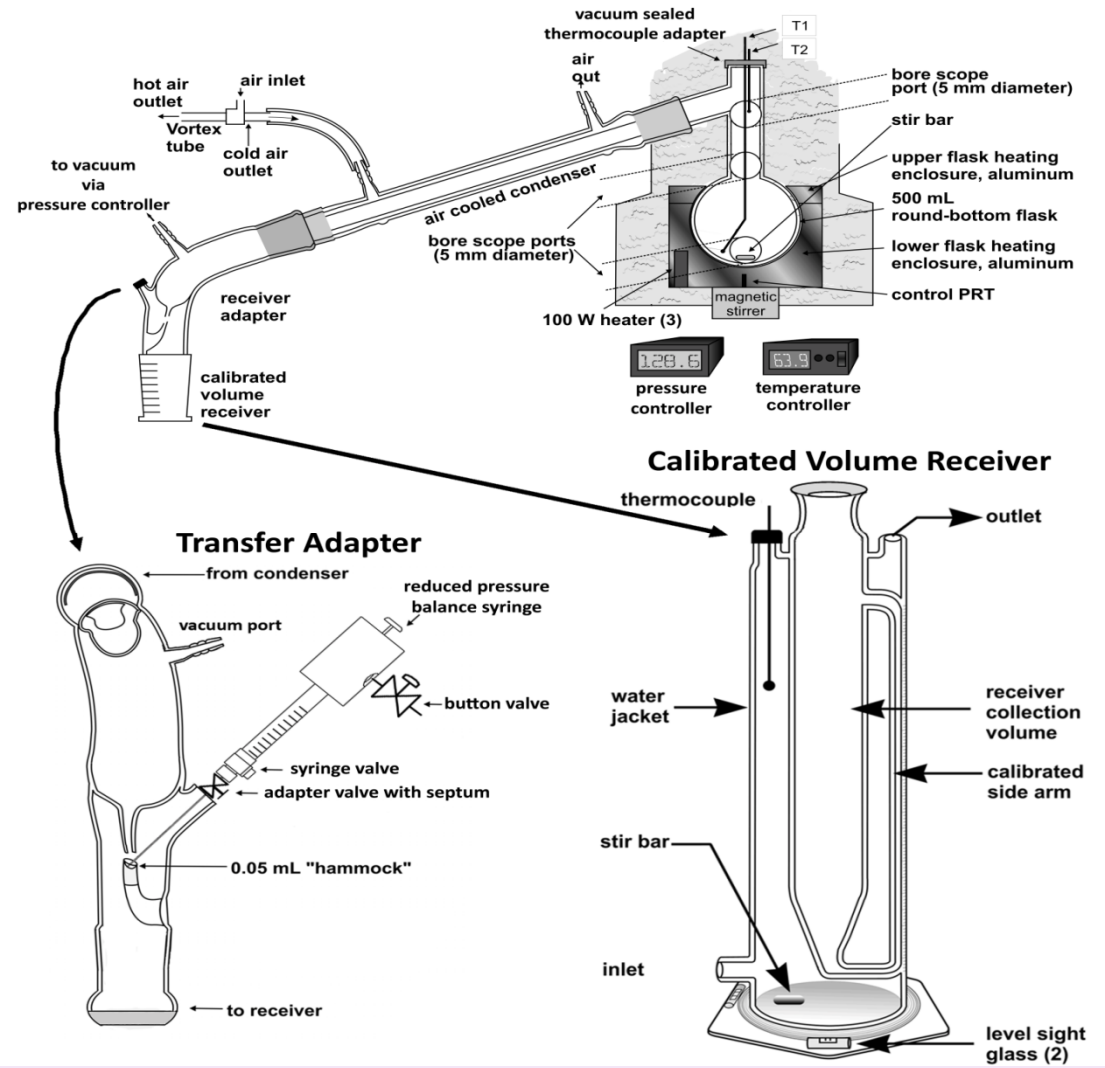

Lower the Pressure, Lower the Temperature

Apparatus is vacuum tight,

with a PID vacuum controller,

CO_2 controlled.

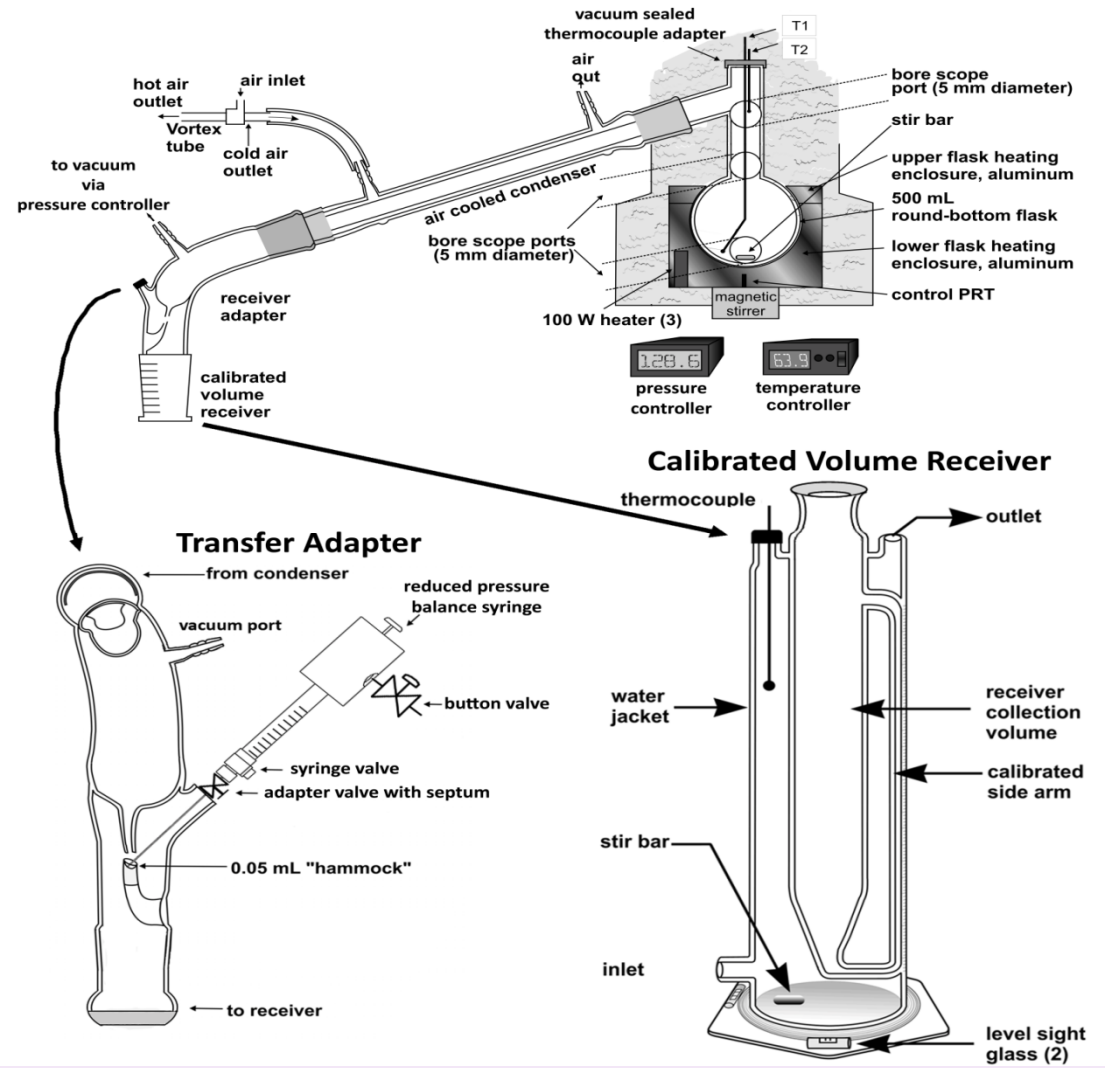

Lower the Pressure, Lower the Temperature

Apparatus is vacuum tight,

with a PID vacuum controller,

CO_2 controlled.

A low pressure, pressure balanced syringe for sampling

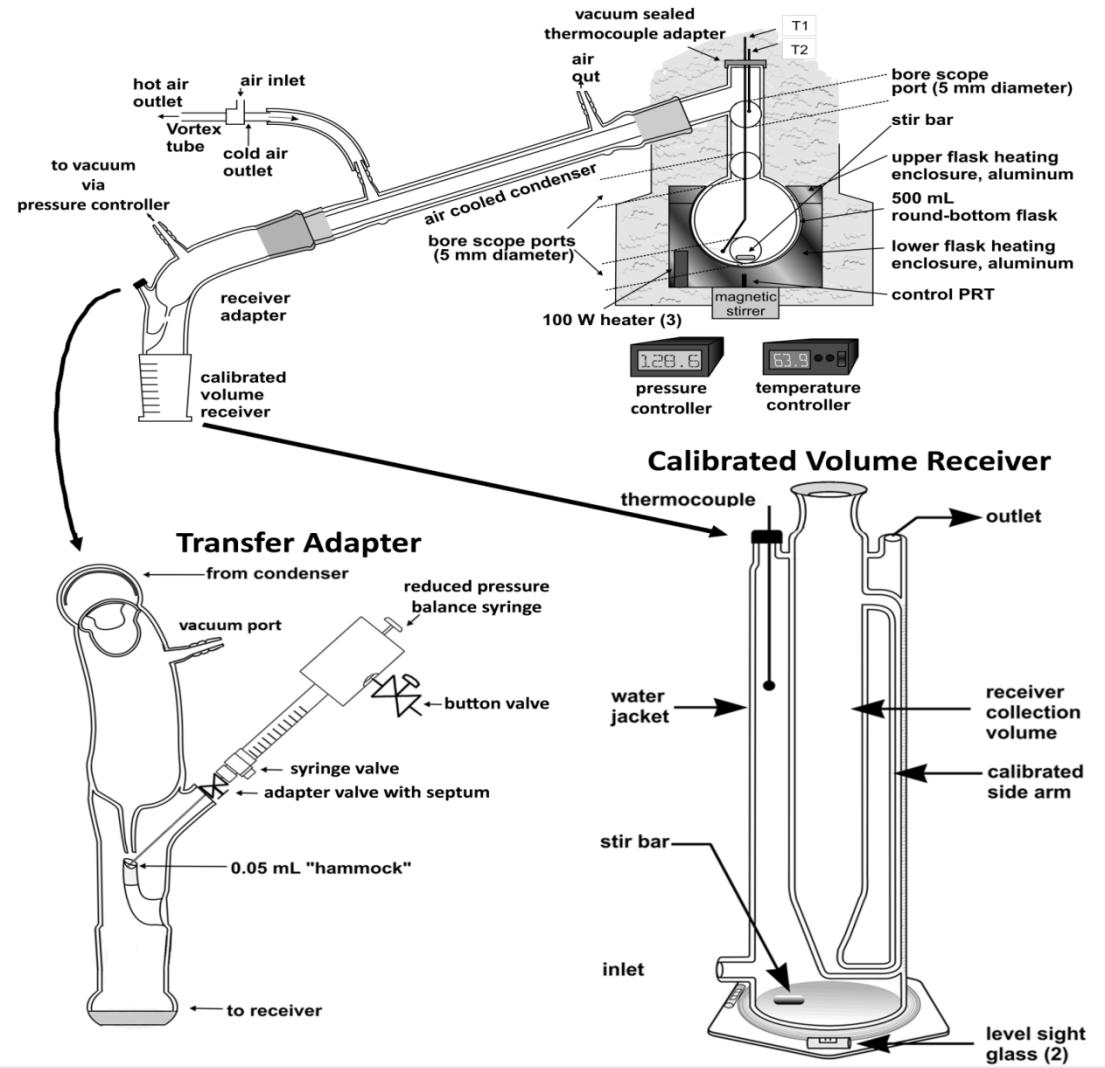

Lower the Pressure, Lower the Temperature

Apparatus is vacuum tight,

with a PID vacuum controller,

CO_2 controlled.

A low pressure, pressure balanced syringe for sampling

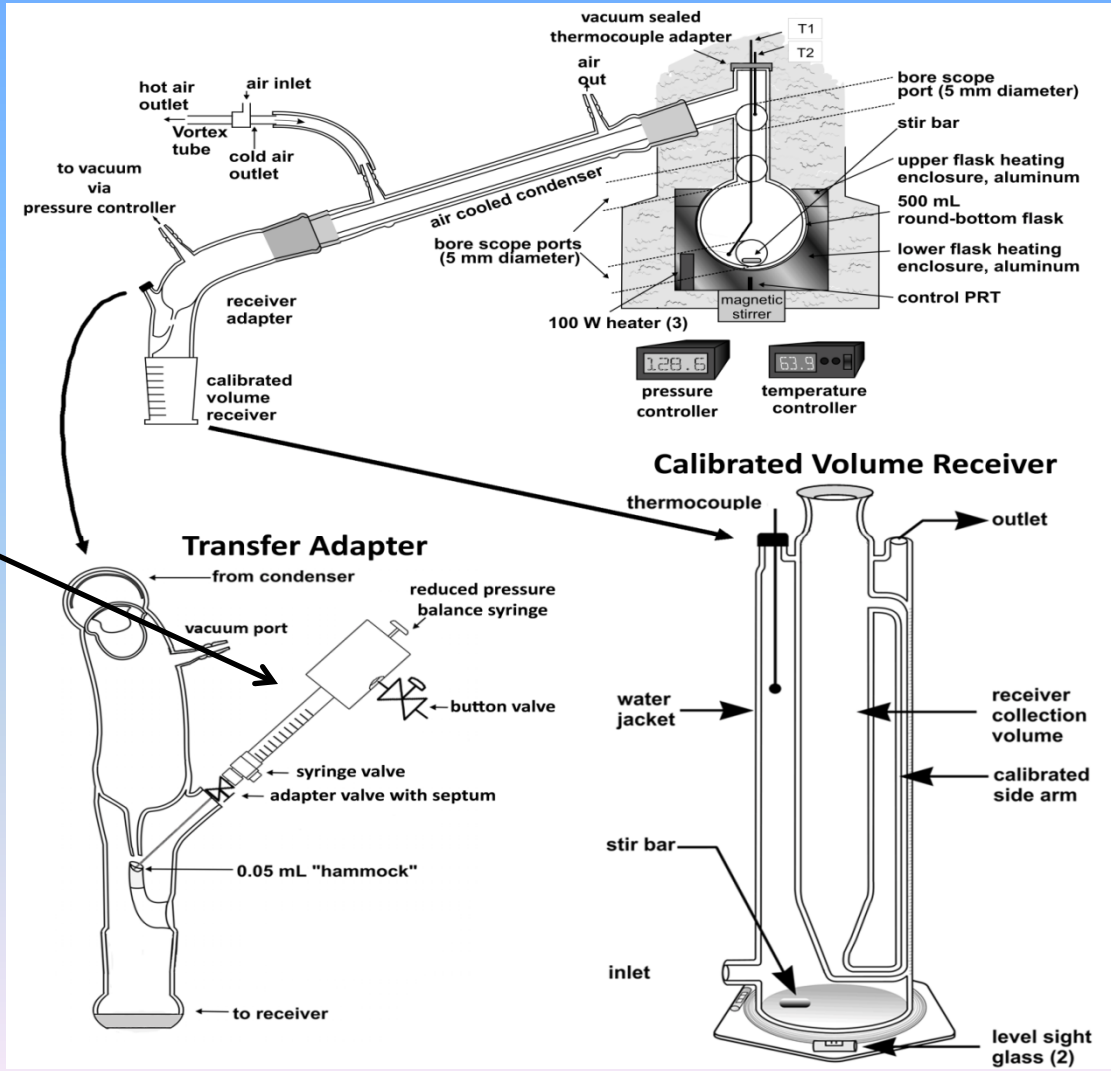

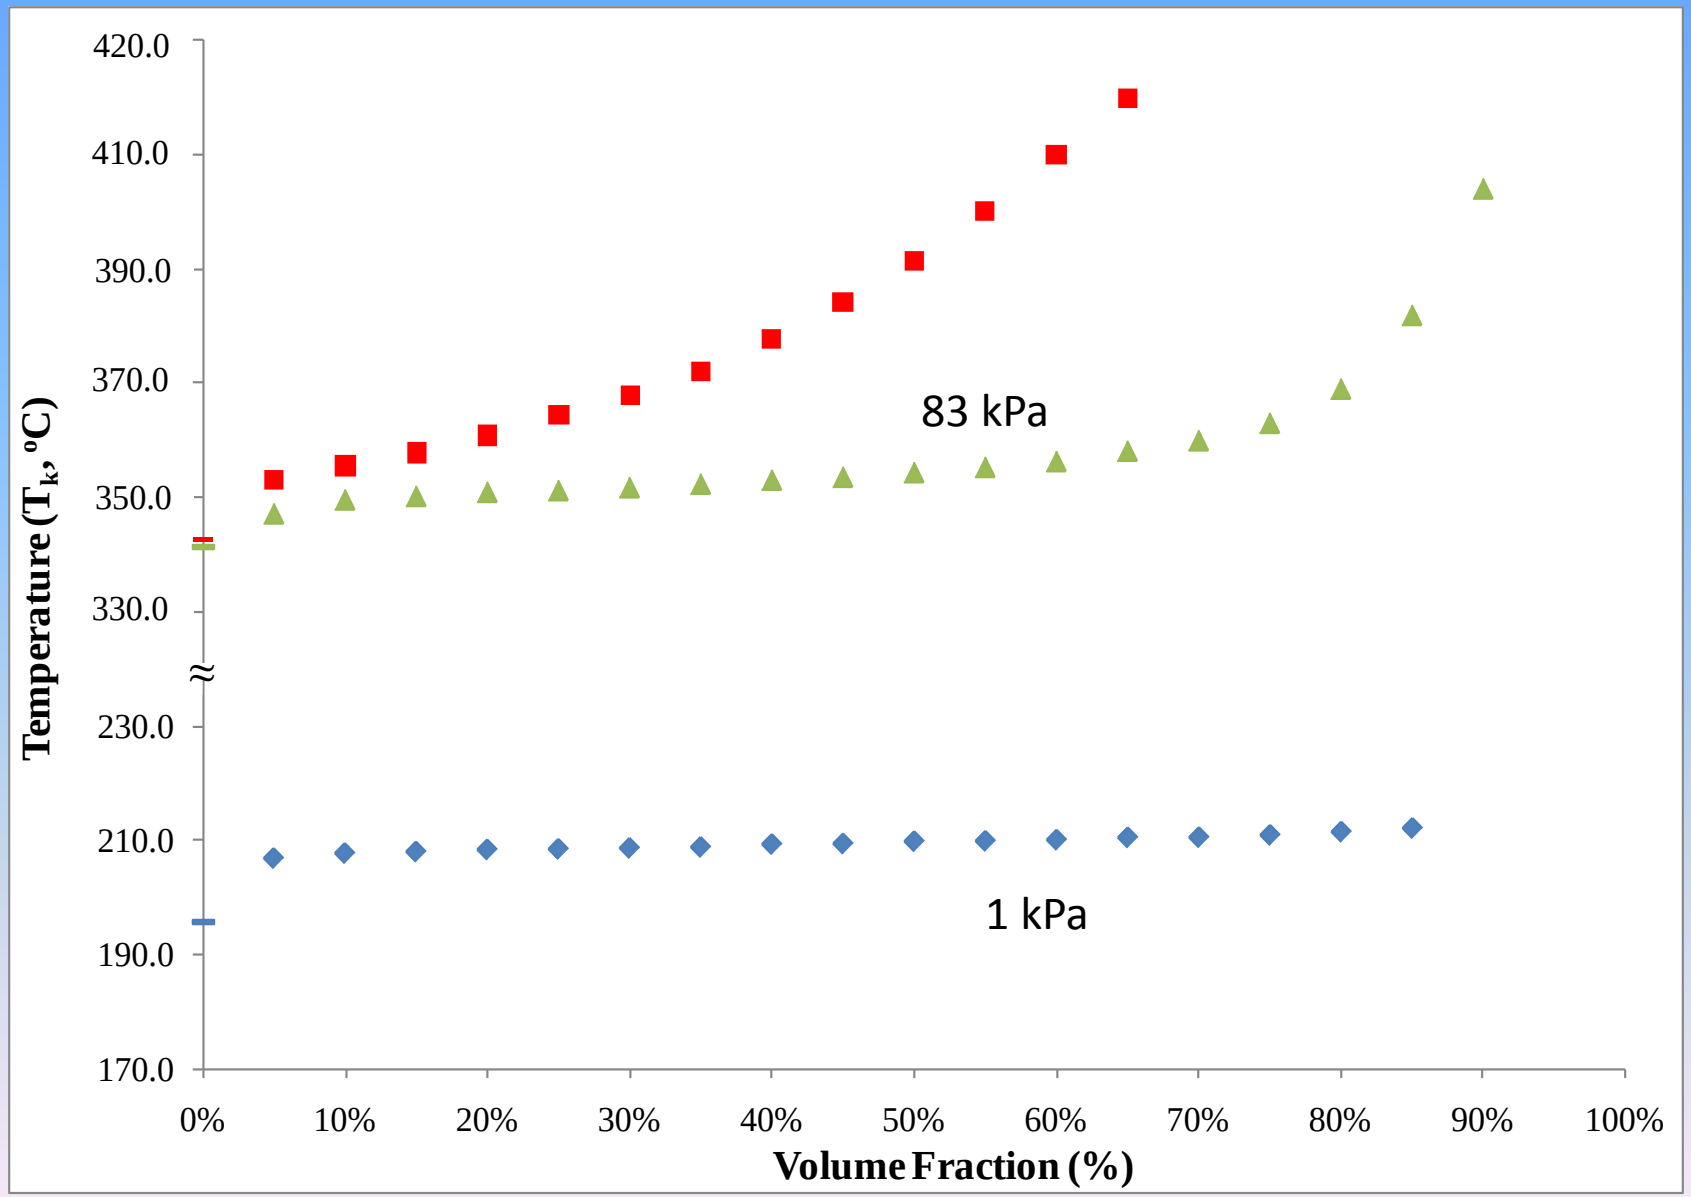
420.0
410.0
390.0
370.0
350.0
330.0
230.0
210.0
190.0
170.0
Temperature (T_k, °C)
83 kPa
1 kPa
0%
10%
20%
30%
40%
50%
60%
70%
80%
90%
100%
Volume Fraction (%)

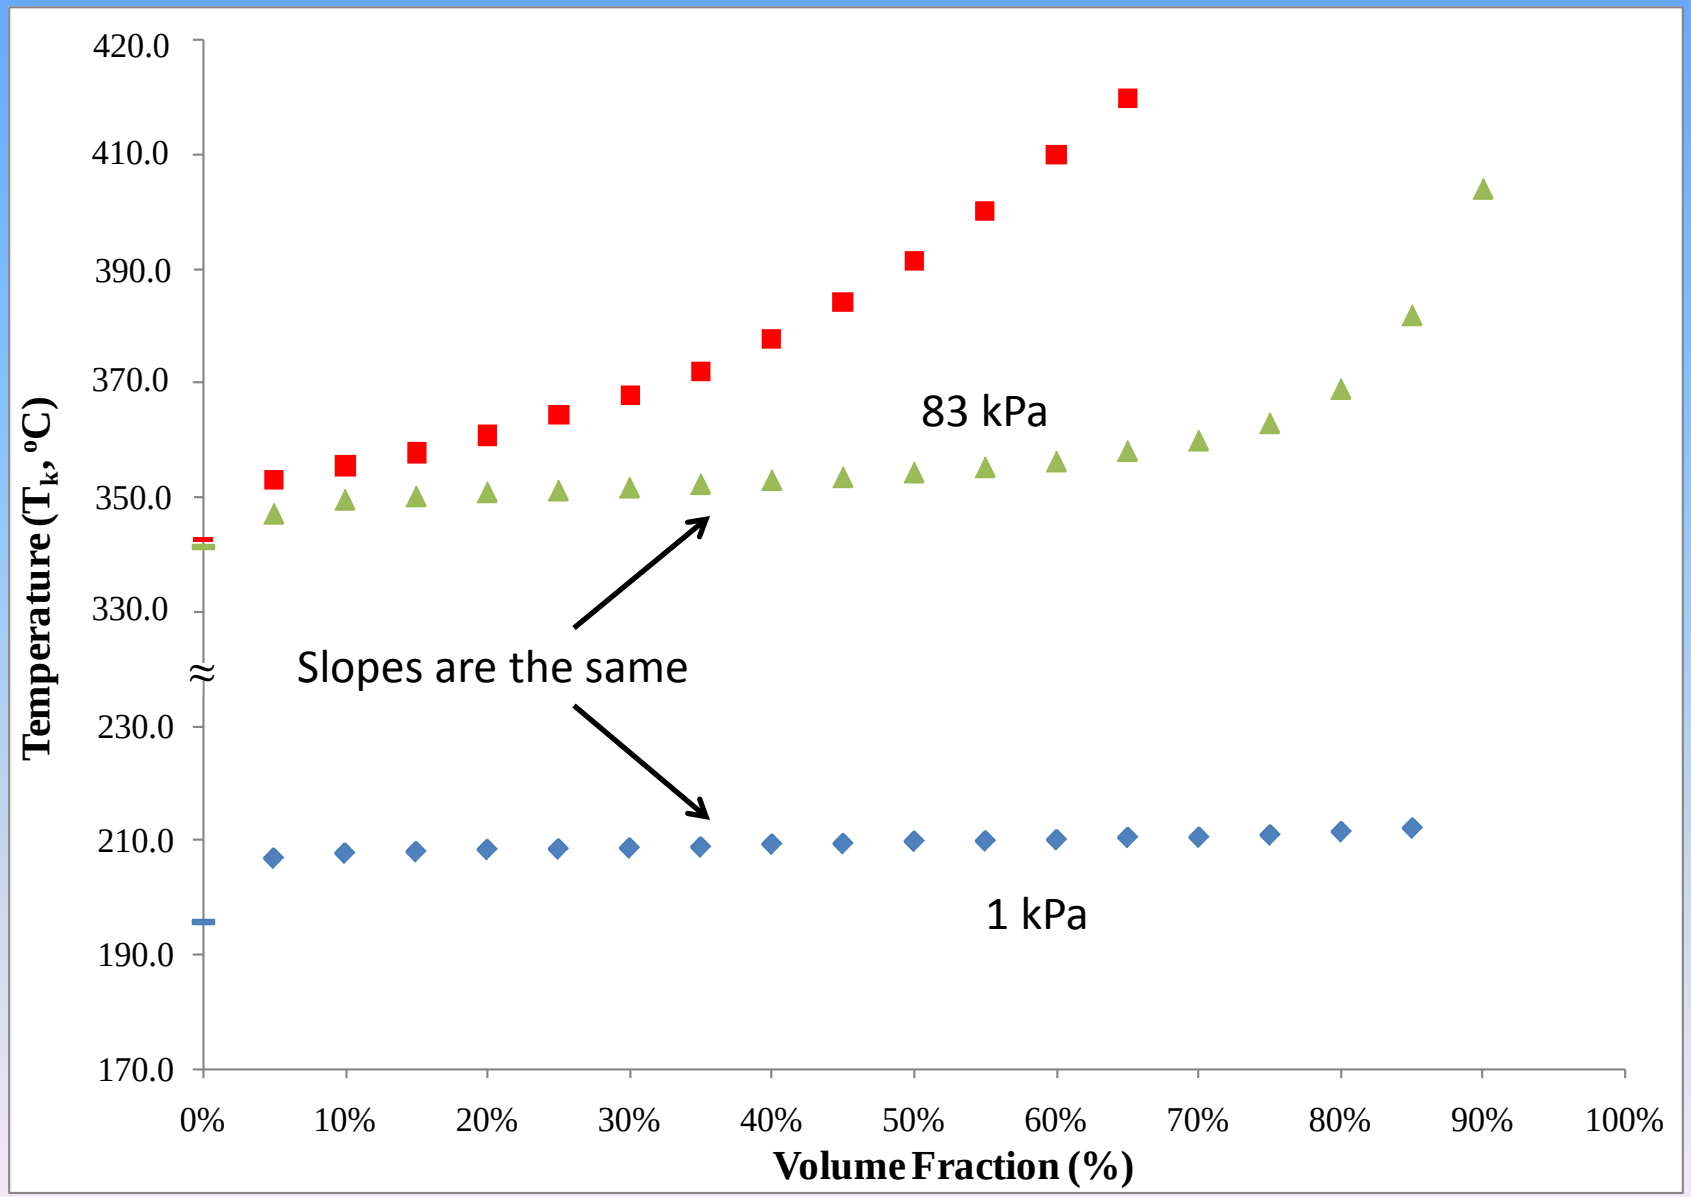
420.0
410.0
390.0
370.0
350.0
330.0
230.0
210.0
190.0
170.0
Temperature (T_k, °C)
0%
10%
20%
30%
40%
50%
60%
70%
80%
90%
100%
Volume Fraction (%)
83 kPa
Slopes are the same
1 kPa

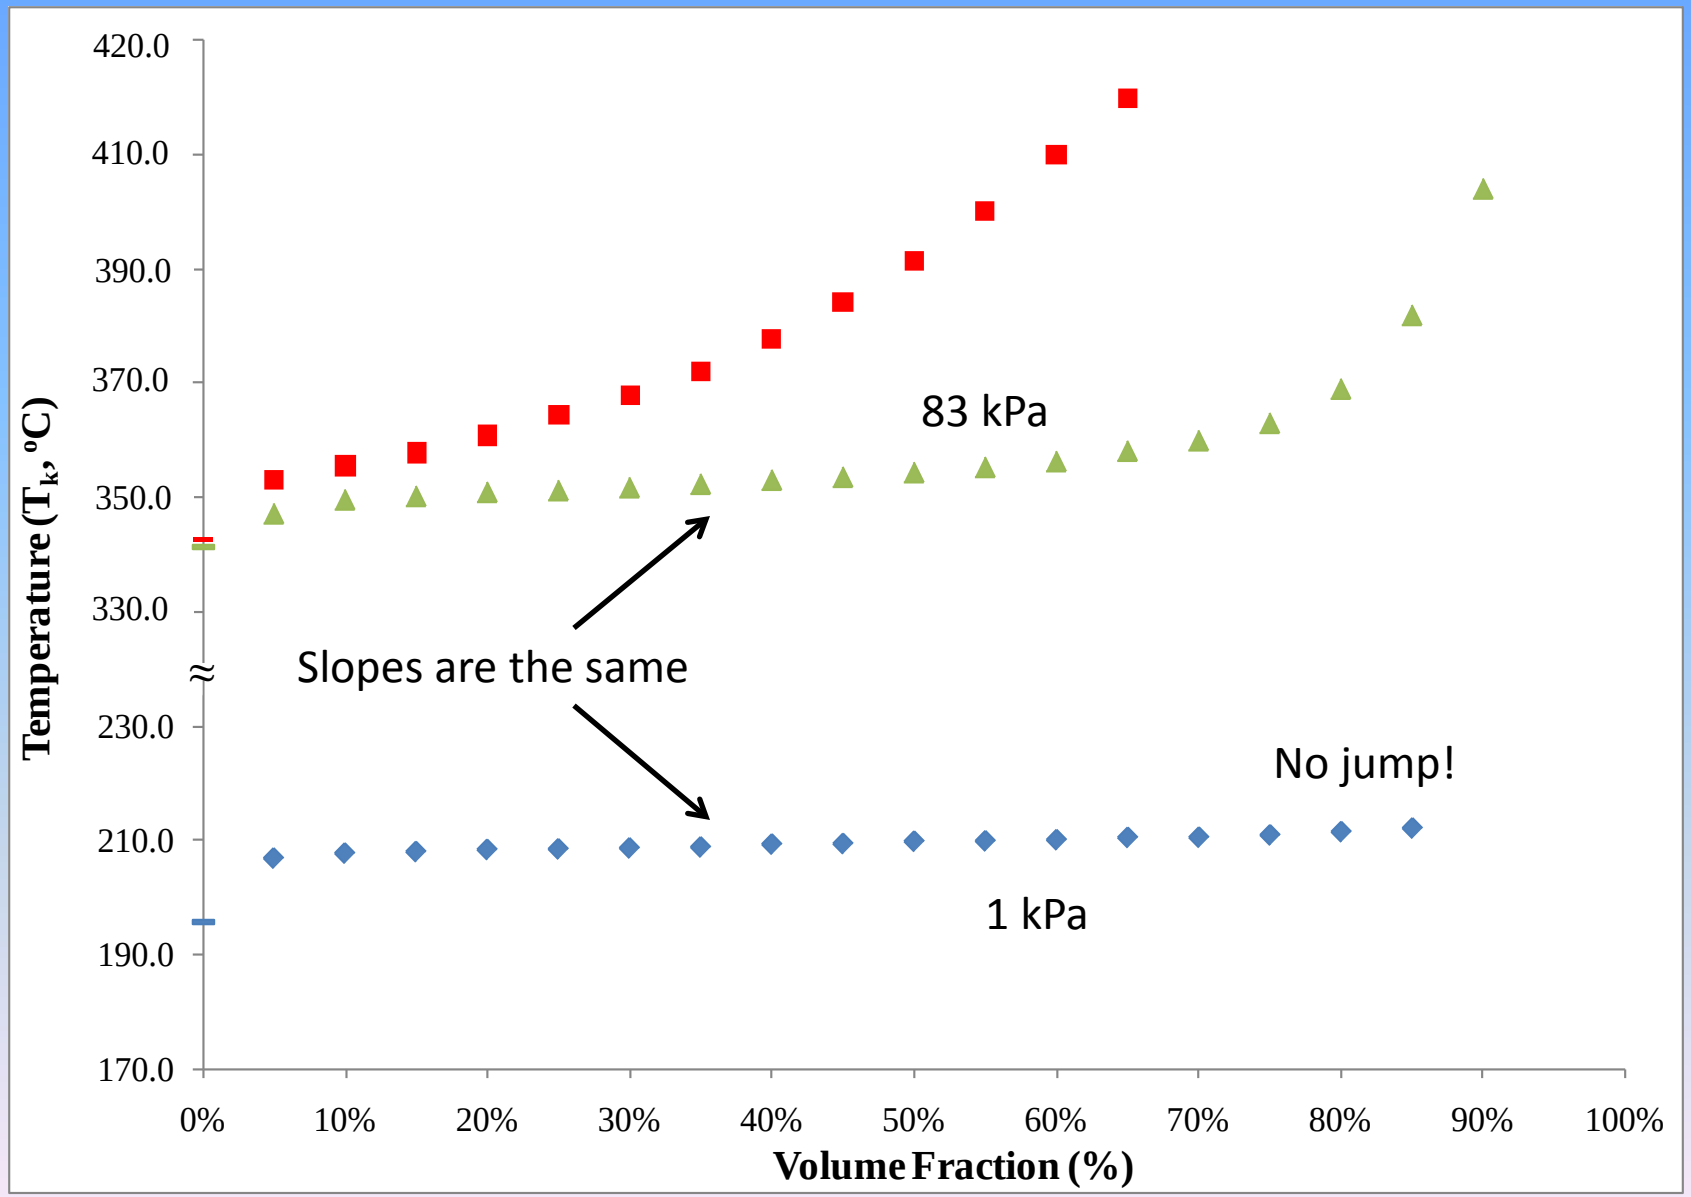
420.0
410.0
390.0
370.0
350.0
330.0
230.0
210.0
190.0
170.0
Temperature (T_k, °C)
0%
10%
20%
30%
40%
50%
60%
70%
80%
90%
100%
Volume Fraction (%)
83 kPa
Slopes are the same
No jump!
1 kPa

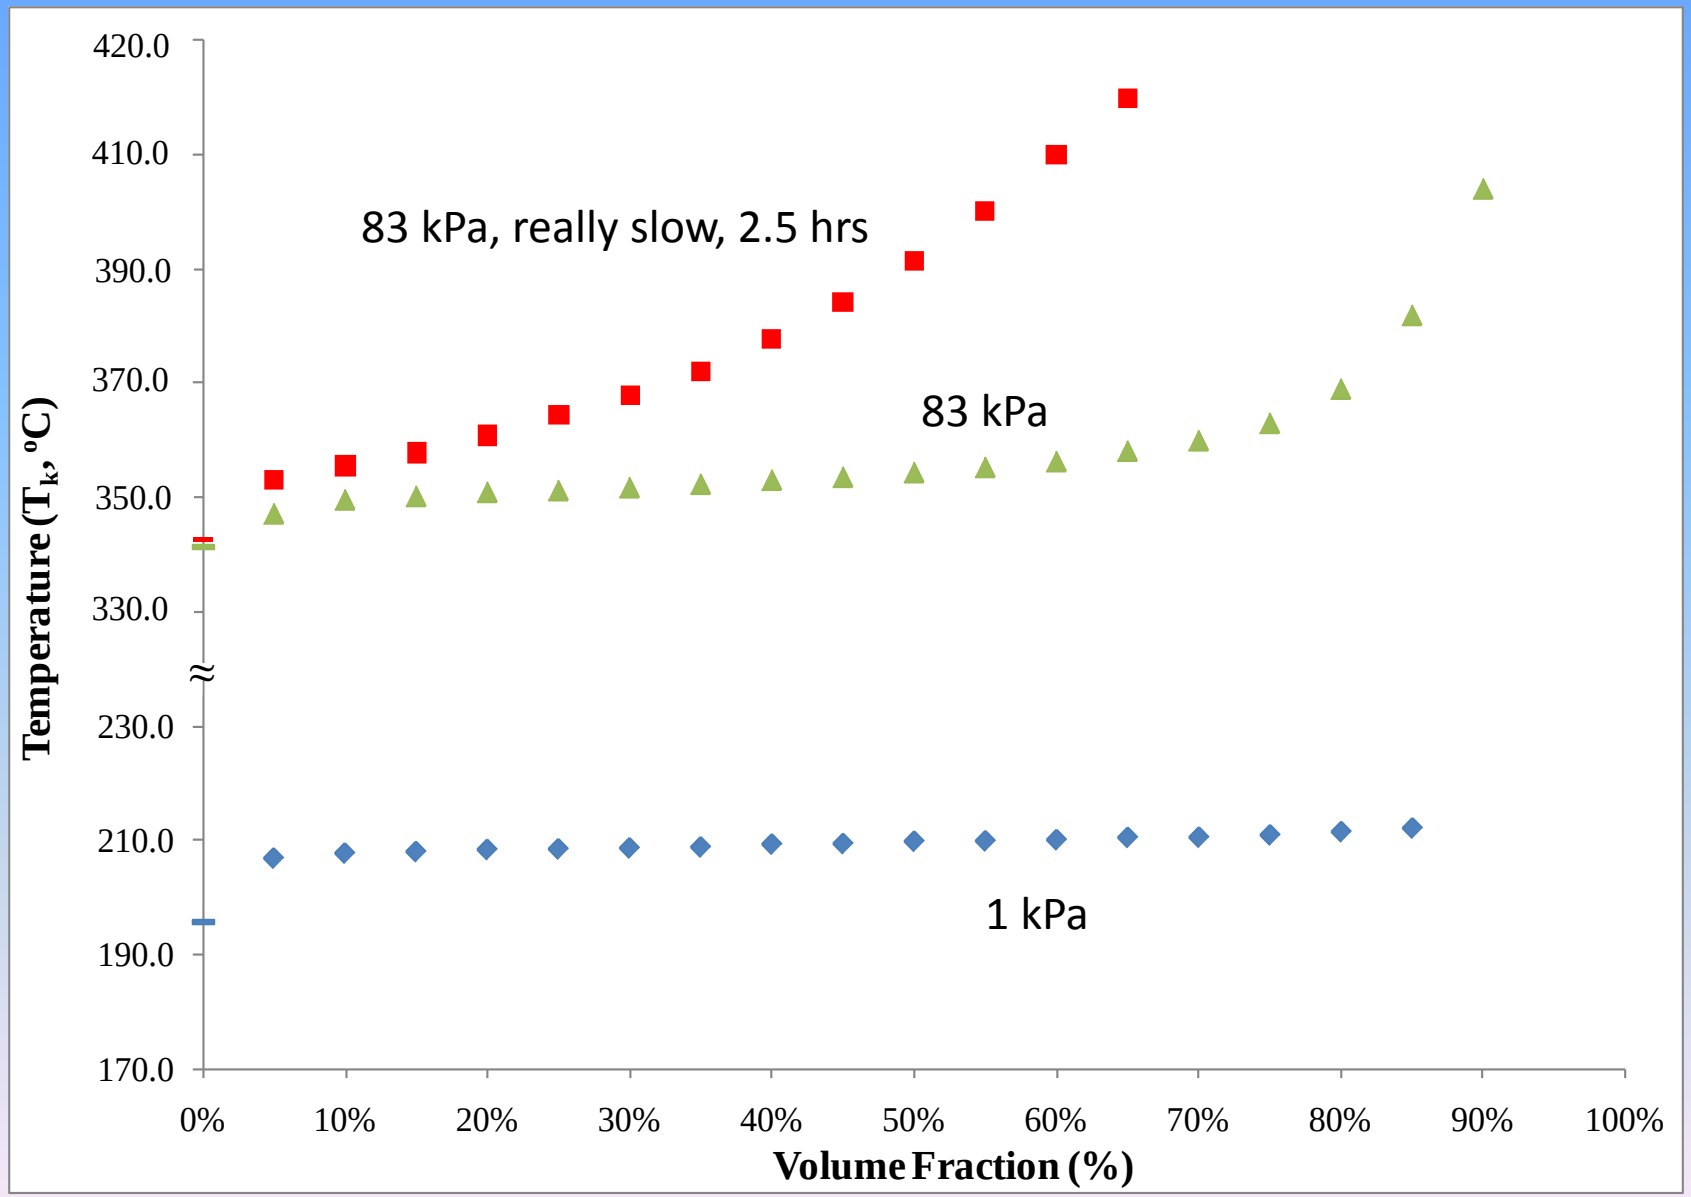
420.0
410.0
390.0
370.0
350.0
330.0
230.0
210.0
190.0
170.0
Temperature (T_k, °C)
83 kPa, really slow, 2.5 hrs
83 kPa
1 kPa
0%
10%
20%
30%
40%
50%
60%
70%
80%
90%
100%
Volume Fraction (%)

FAMEs

- Soybean-based biodiesel fuel

Soybean plant



methyl palmitate

11 %



methyl oleate

24 %



methyl linoleate

54 %

- Cuphea plant-based biodiesel fuel

Cuphea plant



methyl decanoate

74 %

Distillation curves for cuphea (CME) vs. soy (SME) -based biodiesel fuels

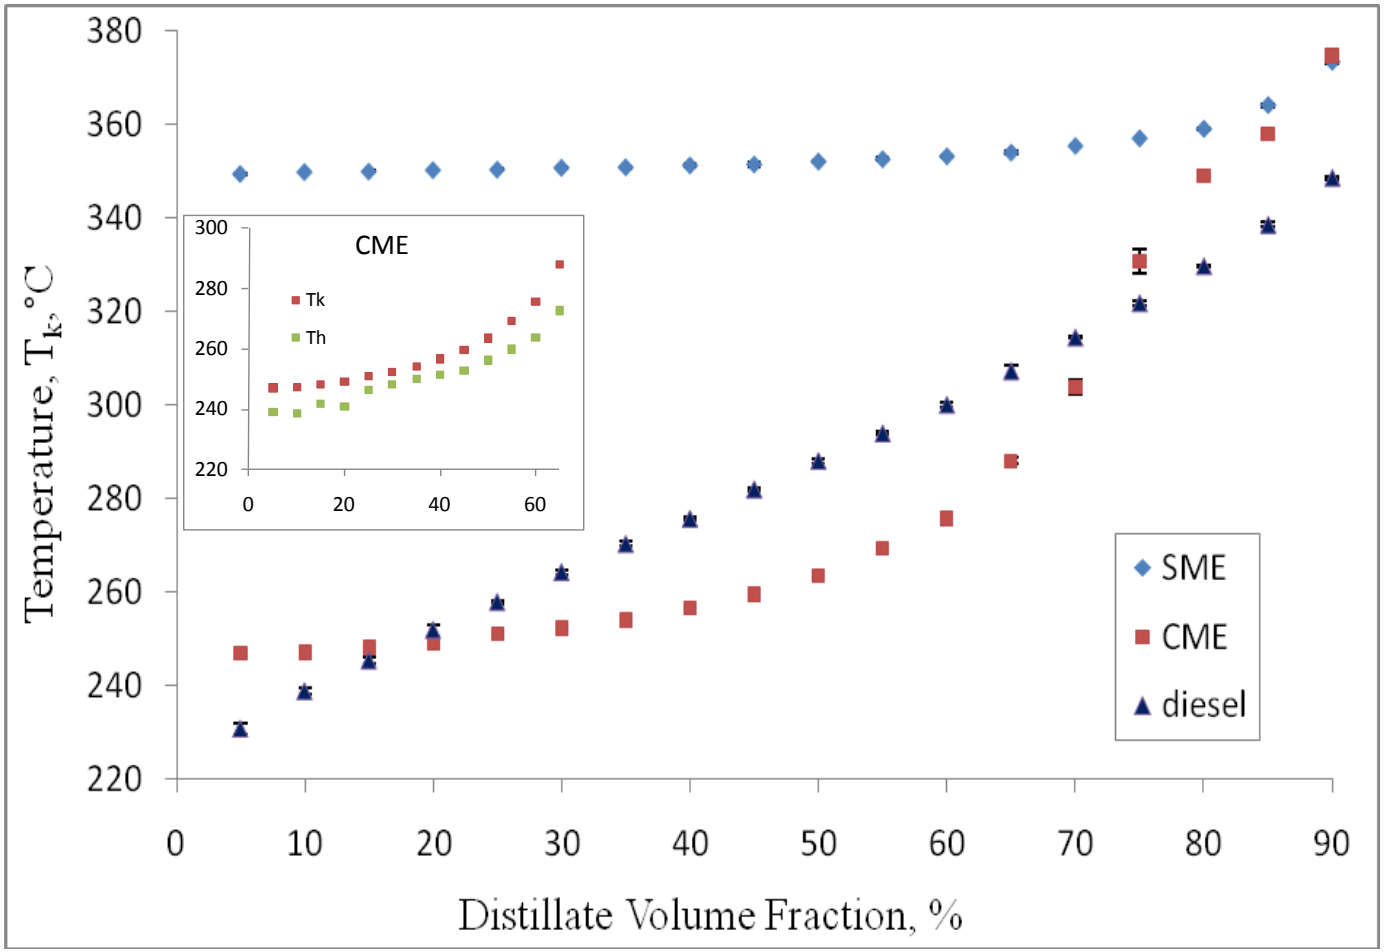

- The temperature range from 5 % to 90 % distillate volume fraction for CME spans 130 °C, whereas for SME this temperature range spans only 25 °C.

Distillation curves for SME (Soy-based B100) compared to CME (cuphea-derived biodiesel fuel

Over 80 % C18 FAMES

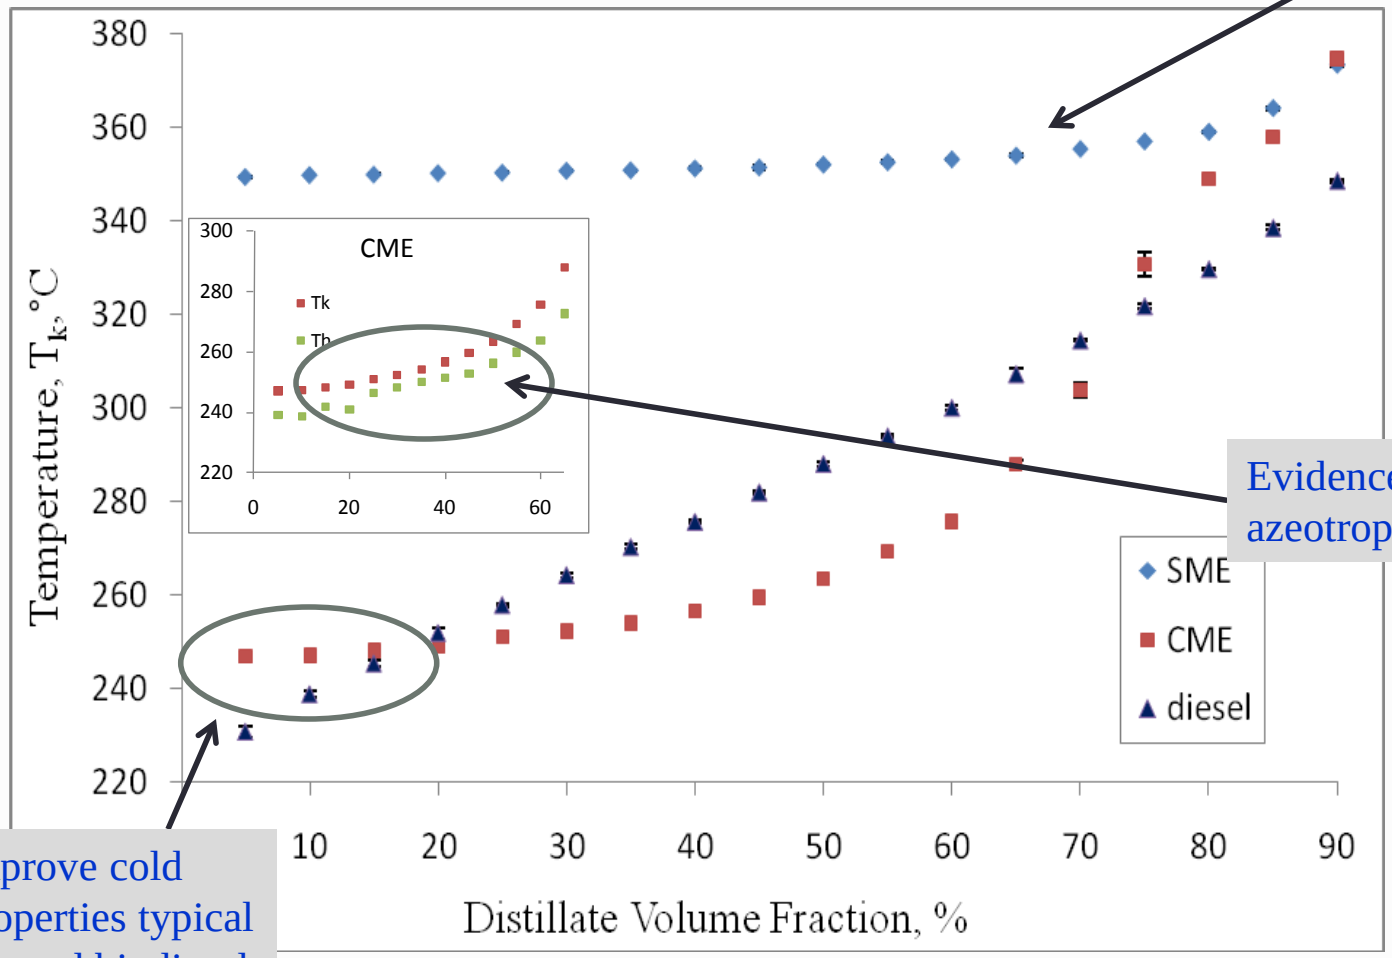

Evidence of possible azeotrope

May improve cold flow properties typical of soy-based biodiesel fuels

Chromatograms of four distillate volume fractions for soybean-based biodiesel fuel

(a) SME Biodiesel Fuel

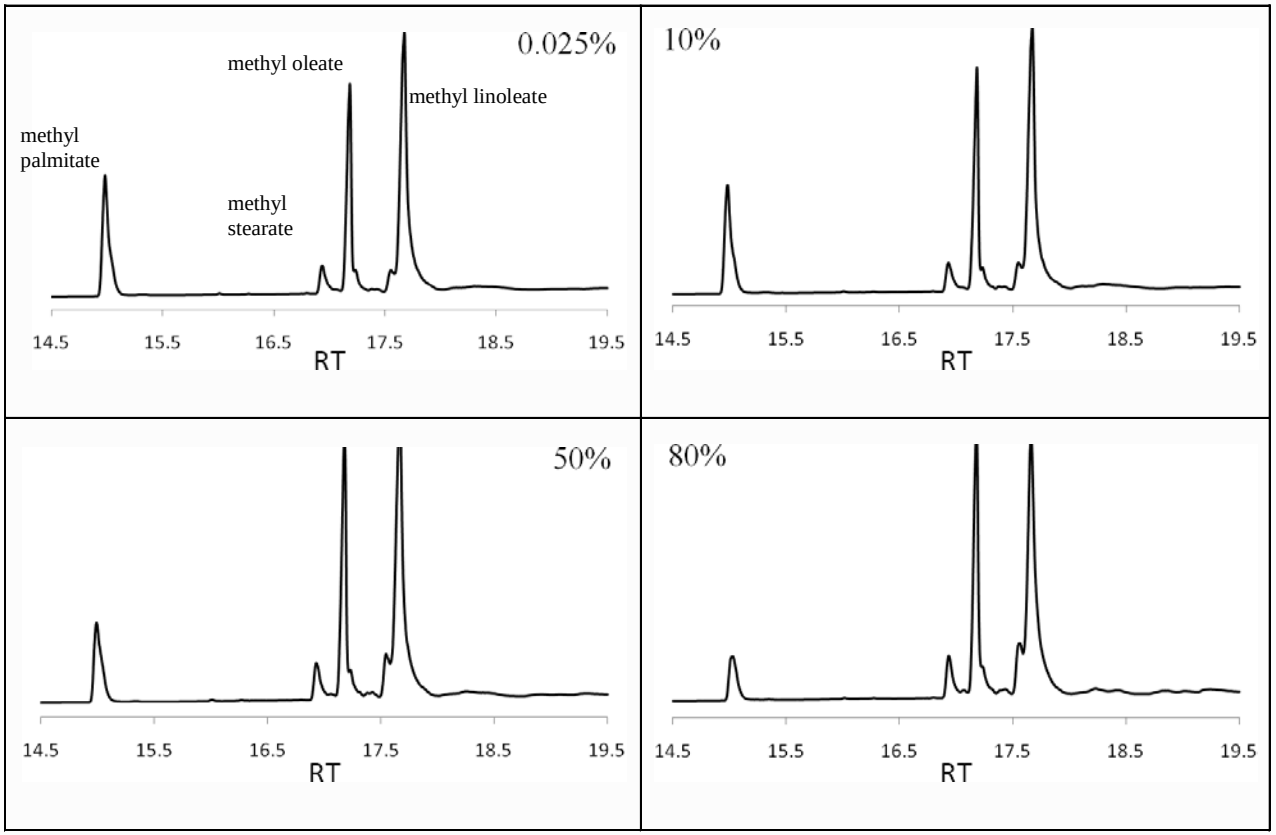

Soybean plant

Chromatograms of four distillate volume fractions for cuphea-based biodiesel fuel

(b) CME Biodiesel Fuel

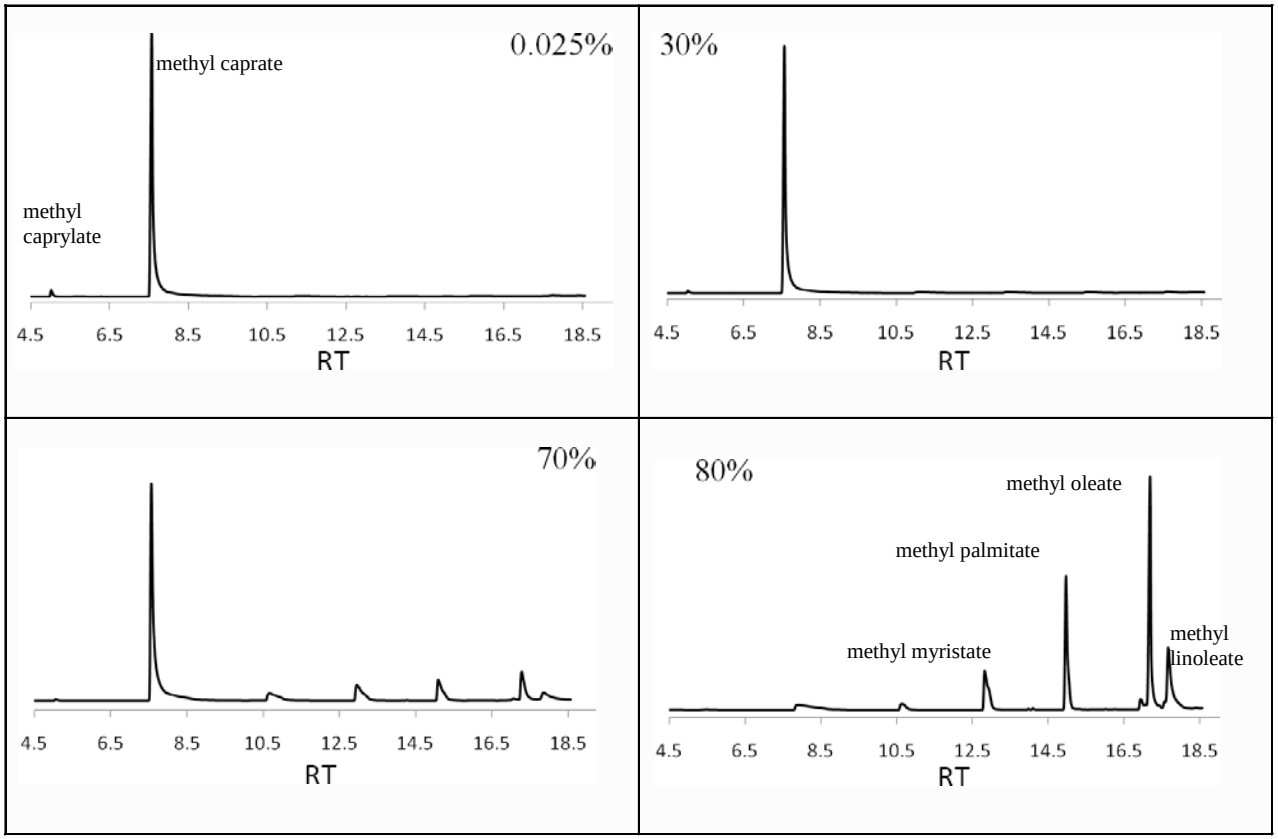

Cuphea plant

Composite enthalpy of combustion

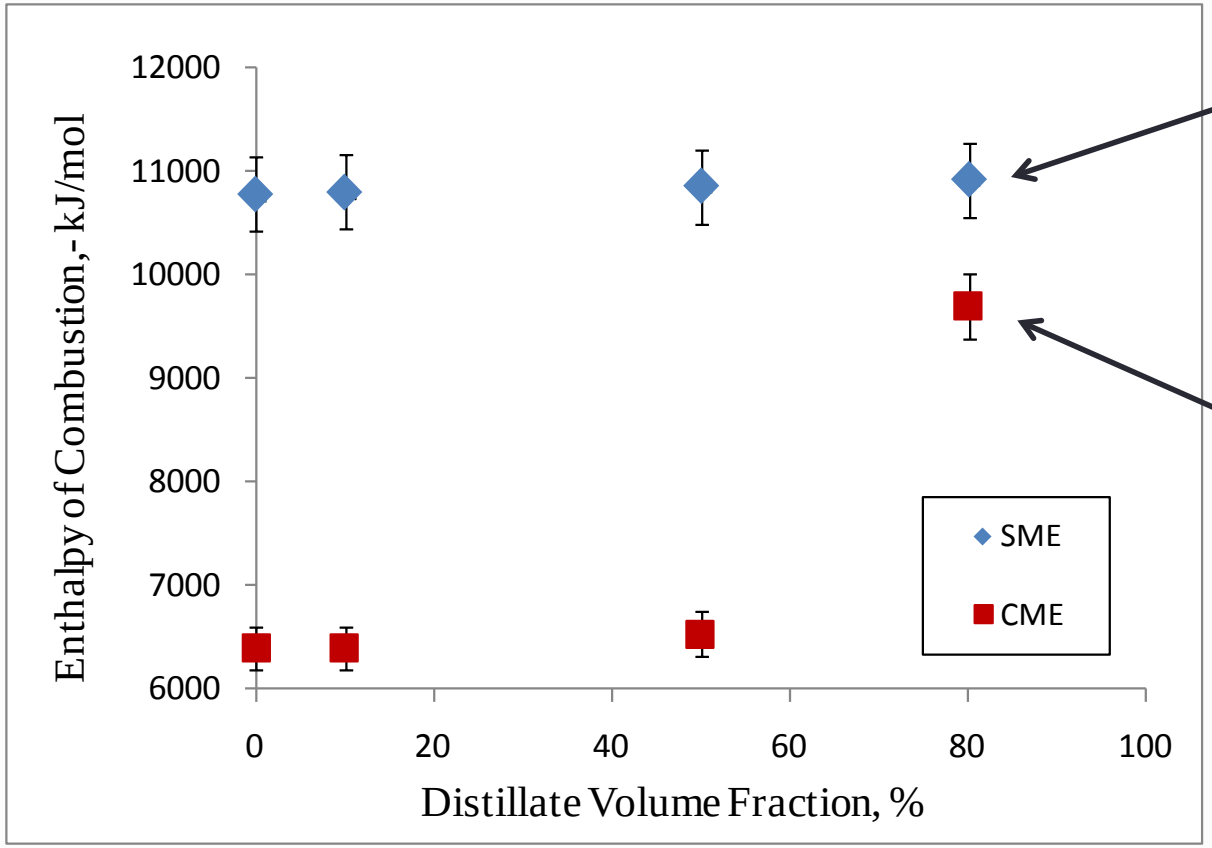

Soybean plant

Cuphea plant

- The enthalpy of combustion for the biodiesel fuels SME and CME presented at four distillate cuts, 0.025 % (the first drop), 10 %, 50 %, and 80 %.

Take Home Messages:

NOT:
you're doing it wrong, do it my way

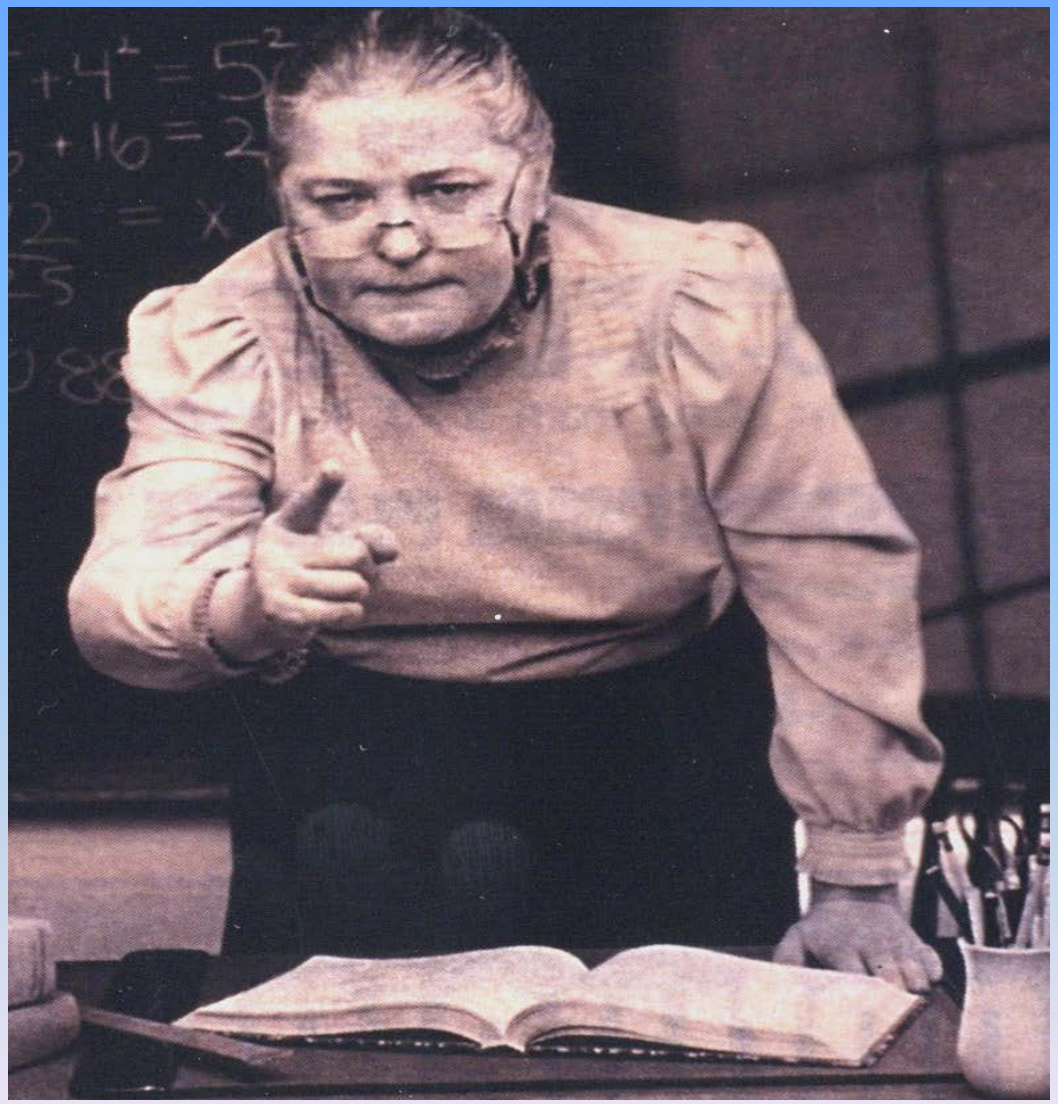

BUT RATHER:
The move to fundamental properties offer an alternative with many powerful advantages

3790 *Energy & Fuels* **2009**, *23*, 3790–3797

Model for the Thermodynamic Properties of a Biodiesel Fuel

Marcia L. Huber, Eric W. Lemmon, Andrei Kazakov, Lisa S. Ott,[†] and Thomas J. Bruno*

Thermophysical Properties Division National Institute of Standards and Technology Boulder, CO

Received February 23, 2009. Revised Manuscript Received May 16, 2009

We present an equation-of-state approach to modeling the thermodynamic properties of a biodiesel fuel. Preliminary Helmholtz-type equations of state were developed with limited experimental data for five fatty acid methyl esters (FAMEs) that are the primary constituents of soy-based biodiesel fuel, namely, methyl palmitate, methyl stearate, methyl oleate, methyl linoleate, and methyl linolenate. These components were combined in a mixture model using ideal mixing to represent the thermodynamic properties of a biodiesel fuel. We performed limited experimental measurements on the density, sound speed, and initial boiling point of two biodiesel fuel samples and compared the results with the model.

Introduction

Biodiesel fuel is a renewable fuel comprised of monoalkyl esters of long chain fatty acids. It can be produced from a variety of feedstocks including common vegetable oils (soybean, cottonseed, palm, peanut, canola, sunflower, safflower, coconut), animal fats (tallow), and even waste cooking oil.[1] In the United

For biodiesel fuel to replace or extend petroleum-derived diesel fuel on a large scale, it is necessary to be able to substitute the two fuels in a fairly straightforward manner (that is, biodiesel fuel, or mixtures thereof, should ideally be drop-in replacements). As the market accepts the various blends of biodiesel fuel mentioned above, the availability of thermophysical property information will become more critical. It is impracti-

Helmholtz Equation of State

- Formulated in terms of $a(T, \rho)$ instead of $p(T, \rho)$

$$a(\rho,T) = a^0(\rho,T) + a^r(\rho,T)$$

ideal gas contribution

residual contribution

- All single phase properties can be calculated as derivatives of the Helmholtz energy

$$p = \rho^2 \left(\frac{\partial a}{\partial \rho} \right)_T$$

Old Man Helmholtz

- Typical form of residual contribution

$$\alpha^r(\delta,\tau) = \frac{a^r}{RT} = \sum N_k \delta^{d_k} \tau^{t_k} + \sum N_k \delta^{d_k} \tau^{t_k} e^{-\delta^{l_k}}$$

summations typically have 4-20 terms

$$\delta = \frac{\rho}{\rho_c} \qquad \tau = \frac{T_c}{T}$$

REFPROP - NIST Reference Fluid Properties

File Edit Options Substance Calculate Plot Window Help Cautions

3: Mixture 1: T = 300.0 K (0.0022...

	Temperature (K)	Pressure (MPa)	Density (mol/dm³)	Enthalpy (J/mol)	Entropy (J/mol-K)
1	300.00	0.20000	0.080467	14728.	105.63
2	300.00	0.40000	0.16151	14696.	99.786
3	300.00	0.60000	0.24313	14663.	96.335
4	300.00	0.80000	0.32533	14631.	93.864
5	300.00	1.0000	0.40812	14598.	91.929
6	300.00	1.2000	0.49150	14565.	90.333
7	300.00	1.4000	0.57547	14532.	88.971
8	300.00	1.6000	0.66004	14499.	87.780
9	300.00	1.8000	0.74521	14466.	86.719
10	300.00	2.0000	0.83098	14433.	85.762
11	300.00	2.2000	0.91735	14400.	84.887
12	300.00	2.4000	1.0043	14366.	84.082
13	300.00	2.6000	1.0919	14333.	83.334

Select Properties to Display

Thermodynamic | Transport, Misc. | Derivative

- [x] Temperature
- [x] Pressure
- [x] Density
- [ ] Volume
- [ ] Int. Energy
- [x] Enthalpy
- [x] Entropy
- [ ] Cv
- [ ] Cp
- [ ] Cp0
- [ ] Cp/Cv
- [ ] Csat
- [ ] Sound Speed
- [ ] Comp. Factor
- [ ] Joule-Thom.
- [ ] Quality
- [ ] 2nd Virial Coef.
- [ ] 3rd Virial Coef.

(•) Bulk properties only
( ) Bulk, liquid, and vapor p

OK Cancel Select All Clear All

Estimated critical properties
Temperature: 196.19 K
Pressure: 5.0505 MPa
Density: 9.7532 mol/dm³

Components and composition

Mole Fraction

carbon dioxide	0.002202
nitrogen	0.021926
methane	0.95311
ethane	0.015123
propane	0.004471
isobutane	0.000495

Molar mass: 16.873 g/mol

OK Cancel

REFPROP

Reference Fluid Thermodynamic and Transport Properties

NIST Standard Reference Database 23, Version 8.1beta July 09, 2007
E.W. Lemmon, M.L. Huber, and M.O. McLinden
Physical and Chemical Properties Division
Copyright 2007 by the U.S. Secretary of Commerce on behalf of
The United States of America. All Rights Reserved.

NIST uses its best efforts to deliver a high quality copy of the Database and to verify that the data contained therein have been selected on the basis of sound scientific judgement. However, NIST makes no warranties to that effect, and NIST shall not be liable for any damage that may result from errors or omissions in the Database.

Continue Information

Select Units

Dimension	Units
Temperature	K
Pressure	MPa
Volume	dm³
Mass/Mole	g/mol
Energy	J
Sound Speed	m/s
Viscosity	µPa-s
Thermal Conductivity	mW/m-K
Surface Tension	mN/m

Reset Units: SI, SI with Celsius, Molar SI, mks, cgs, Mixed, English, Unitless

Properties: ( ) Mass Basis (•) Molar Basis

Composition: ( ) Mass Basis (•) Molar Basis

OK Cancel

Pressure
[ ] Use Gage Pressure
(•) Barometric Pressure 0.101325 MPa
( ) Elevation m

Current Fluid: Mixture 1 Components: carbon dioxide/nitrogen/methane/ethane/propane/isobutane/butane/isopentane/pentane/heptane (0.002202/0.021926/0.95311/0.015123/0.004471/0.000495/0.001366/0

Documentation

- Bruno, T.J., Improvements in the measurement of distillation curves. 1. a composition explicit approach, Ind. Eng. Chem. Res., 45, 4371-4380, 2006. (4th most cited paper in Ind. Eng. Chem. Res, for 2006)
- Bruno, T.J., Smith, B.L., Improvements in the measurement of distillation curves. 2. application to aerospace/aviation fuels RP-1 and S-8, Ind. Eng. Chem. Res., 45, 4381-4388, 2006. (5th most cited paper in Ind. Eng. Chem. Res, for 2006)
- Bruno, T.J., Method and apparatus for precision on-line sampling of distillate, Sep. Sci. Tech., 41, 309-314, 2006..
- Smith, B.L., Bruno, T.J., Improvements in the measurement of distillation curves. 3. application to gasoline and gasoline + methanol mixtures, Ind. Eng. Chem. Res., 46(1), 297-309, 2007.
- Smith, B.L., Bruno, T.J., Improvements in the measurement of distillation curves. 4. application to the turbine fuel Jet A, Ind. Eng. Chem. Res. 46(1), 310-320, 2007.
- Smith, B.L., Bruno, T.J., Advanced distillation curve measurement with a model predictive temperature controller, Int. J. Thermophys., Int. J. Thermophys., 27(5), 1419-1434, 2006.
- Bruno, T.J., Smith, B.L., Heat of combustion of fuels as a function of distillate cut: application of an advanced distillation curve method, Energy and Fuels,, 20(5), 2109-2116, 2006.
- Smith, B.L., Bruno, T.J., Comparison of JP-8 and coal derived JP-900 with an advanced distillation curve method, Energy and Fuels, 21(5), 2853-2862, 2007.
- Ott, L. S.; Bruno, T. J. Modifications to the copper strip corrosion test for the measurement of sulfur-related corrosion. Intended for J. Sulfur Chem.; 28(5), 493, 2007.
- Ott, L. S.; Bruno, T. J. Corrosivity of fluids as a function of distillate cut: application of an advanced distillation curve method. Energy & Fuels; 21, 2778-2784, 2007.
- Smith, B.L., Bruno, T.J., Application of an advanced distillation curve measurement to mixtures of jet-A + synthetic Fischer-Tropsch S-8, J. Propulsion and Power, 24(3), 618-624, 2008.

More documentation

- Huber, M.L.,Smith, B.L., Ott, L.S., Surrogate mixture model for the thermophysical properties of synthetic aviation fuel S-8, Energy & Fuels, 22, 1104-1114, 2008.
- Huber, M.L.,Smith, B.L., Ott, L.S., Surrogate mixture model for the thermophysical properties of a coal derived fluid, , Energy & Fuels, 22, 3249-3257, 2008.
- Ott, L. S.; Smith, B. L.; Bruno, T. J. Advanced distillation curve measurement of two crude oils. Fuel, 87, 3055-3064, 2008.
- Ott, L. S.; Smith, B. L.; Bruno, T. J. Advanced distillation curve measurement of a bio-derived pig manure crude oil, including corrosivity and composition assessment. Fuel, 87, 3374-3387, 2008.
- Smith, B.L., Ott, L.S., Bruno, T.J., Composition-explicit distillation curves of diesel fuel with glycol ether oxygenates, Env. Sci. Tech., 40(20), 7682-7689, 2008..
- Ott, L.S., Smith, B.L., Bruno, T.J., Composition explicit distillation curves of mixtures of diesel fuel with biomass derived oxygenates, Energy & Fuels, 22, 2518-2526, 2008.
- Smith, B.L., Ott, L.S., Bruno, T.J, Composition ex;licit distillation curves of commercial biodiesel fuels, Ind. Eng. Chem. Res., 47, 5832-5840, 2008.
- Smith, B.L., Ott, L.S., Bruno, T.J, Experimental test of the Sydney Young Equation for the presentation of distillation curve data, J. Chem. Thermodynam., 40, 1352-1357, 2008.
- Ott, L.S., Bruno, T.J., Variability of biodiesel fuel and comparison to petroleum derived diesel fuel: application of a composition and enthalpy explicit distillation curve approach, Energy & Fuels, 22, 2861-2868, 2008.
- Ott, L.S., Hadler, A.B., Bruno, T.J., Variability of rocket propellants RP-1, RP-2 and TS-5: application of a composition and enthalpy explicit distillation curve approach, Ind. Eng. Chem. Res., 47, 9225-9233, 2008.
- Bruno, T.J., Wolk, A., Naydich, A., Stabilization of biodiesel fuel at elevated temperatures: evaluation by the advanced distillation curve approach, Energy and Fuels, 23(3), 1015-1023, 2009.

Even More documentation

- Lovestead, T. M., Bruno, T.J., Application of the advanced distillation curve method to the aviation fuel avgas 100LL, Energy and Fuels, 23 (4), 2176–2183, 2009.
- Bruno, T.J., Wolk, A., Naydich, A., Composition-explicit distillation curves for mixtures of gasoline with four-carbon alcohols (butanols), Energy & Fuels, 23 (4), pp 2295–2306, 2009.
- Bruno, T.J., Wolk, A., Naydich, A., Analysis of fuel ethanol plant liquors with the composition explicit distillation curve method, Energy & Fuels, 23 (6), 3277–3284, 2009.
- Lovestead, T.M., Bruno, T.J., Comparison of the hypersonic vehicle fuel JP-7 to the rocket propellants RP-1 and RP-2 with the advanced distillation curve method, Energy & Fuels, 2009, 23(7), 3637–3644.
- Huber, M.L., Lemmon, E.W., Kazakov, A., Ott, L.S., Bruno, T.J., Model for the Thermodynamic Properties of a Biodiesel Fuel, Energy & Fuels, In Press.
- Bruno, T.J., Ott, L.S., Lovestead, T.M., Huber, M.L., "The Composition Explicit Distillation Curve Technique: Relating Chemical Analysis and Physical Properties of Complex Fluids," Journal of Chromatography A, 2009, 1217(16), 2703-2715.
- Bruno, T.J., Ott, L.S., Lovestead, T.M., Huber, M.L., "Relating Complex Fluid Composition and Thermophysical Properties with the Advanced Distillation Curve Approach," Chemical Engineering & Technology, 2010, 33(3), 363-376.
- Bruno, T.J., Ott, L.S., Smith, B., Lovestead, T.M., "Complex Fluid Analysis with the Advanced Distillation Curve Approach" Analytical Chemistry, 2010, 82(3), 777-783.
- Lovestead, T.M., Windom, B.C., Riggs, J.R., Nickell, C., and T.J. Bruno, "Assessment of the Compositional Variability of RP-1 and RP-2 with the Advanced Distillation Curve Approach" Energy & Fuels, 2010, 24(10), 5611–5623.
- Windom, B.C., Lovestead, T.M., Mascal, M., Nikitin, E.B., and T.J. Bruno, "Advanced Distillation Curve Analysis on Ethyl Levulinate as a Diesel Fuel Oxygenate and a Hybrid Biodiesel Fuel," Energy and Fuels, 2011, 25(4), 1878–1890.

Still More documentation

- Lovestead, T. M., Windom, B. C. and T. J. Bruno, “Application of the Advanced Distillation Curve Method to the Development of Cuphea-Derived Biodiesel Fuel,” Energy and Fuels, 2010, 24(6), 3665–3675.
- Bruno, T. J., Wolk, A., Naydich, A., Huber, M.L., Composition explicit distillation curves for mixtures of diesel fuel with dimethyl carbonate and diethyl carbonate Energy & Fuels 2009, 23, (8), 3989-3997.
- Bruno, T. J., Wolk, A., Naydich, A., Composition-explicit distillation curves for mixtures of gasoline and diesel fuel with gamma-valerolactone. Energy & Fuels 2010, 24, 2758-2767.
- Bruno, T. J.; Jorgenson, E. L.; Lovestead, T. M.; Huber, M. L.; Riggs, J. R., Comparison of diesel fuel oxygenate additives with the composition explicit distillation curve method. Part 1: linear compounds with one to three oxygens, Energy & Fuels, 25, 2493-2507. Energy & Fuels 2011, 25, 2493 - 2507.
- Bruno, T. J.; Lovestead, T. M.; Riggs, J. R.; Huber, M. L., Comparison of diesel fuel oxygenate additives with the composition explicit distillation curve method. Part 2: cyclic compounds with one to two oxygens. Energy & Fuels 2011, 25, (2508 - 2517).
- Lovestead, T. M.; Bruno, T. J., Comparison of diesel fuel oxygenate additives with the composition explicit distillation curve method. Part 3: t-butyl glycerols. Energy & Fuels 2011, 25, (2518 - 2525).
- Burger, J. L.; Baibouine, E.; Bruno, T. J., Comparison of diesel fuel oxygenates with the composition explicit distillation curve method Part 4: alcohols, aldehydes and butanoic acid. Energy & Fuels 2012, 26, 1114-1126.
- Bruno, T. J., Baibourine, E., and T. M. Lovestead, “Comparison of Synthetic Paraffinic Kerosene Turbine Fuels with the Composition-Explicit Distillation Curve Method,” Energy and Fuels, 2010, 24(5), 3049–3059.
- Mascal, M. and E. B. Nikitin, “Co-processing of carbohydrates and lipids in oil crops to produce a hybrid biodiesel,” Energy and Fuels. 2010, 24, 2170-2171.

Acknowledgements:

- AFOSR (MIPR F1ATA06004G004)
- AFRL (MIPR F4FBEY5102G001) Wright-Pat AFB
- AFRL (MIPR F1SBAA8022G001) Edwards AFB
- NASA (contract *C31053A)*

Katy Abel, Univ. Colorado

Jean VanBuren, Cornell

Tara M. Lovestead

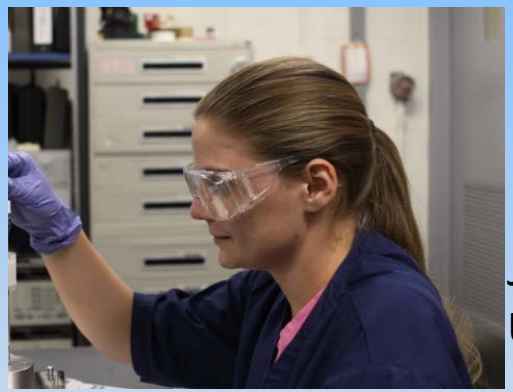

Jessica Burger
Univ. Colorado

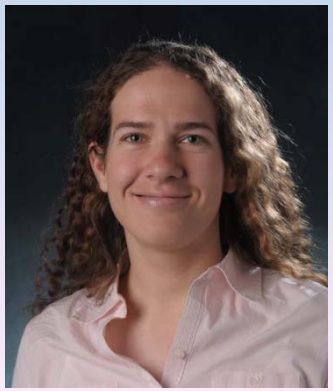

Raina Gough
CU

Sean Dembowski

Lisa S. Ott ,Cal State

More Acknowledgements

Alex Naydich,
Cornell

Arron Wolk
Yale

Peter
Hsieh, NW

Chris Nickell
CSU

Amelia Hadler,
Oberlin College

Gerd Nji
Univ. of Alberta

Bret Windom
U FL

Jen Riggs, DU

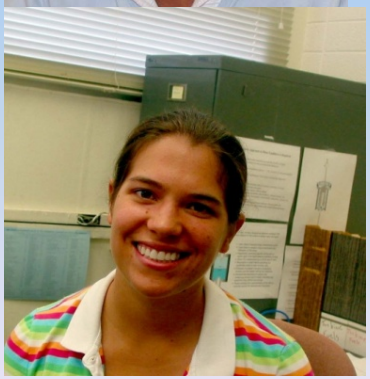

Beverly L. Smith

Univ of Oregon

Sam Allen
U Cal Chico

Erica Jorgenson
CU
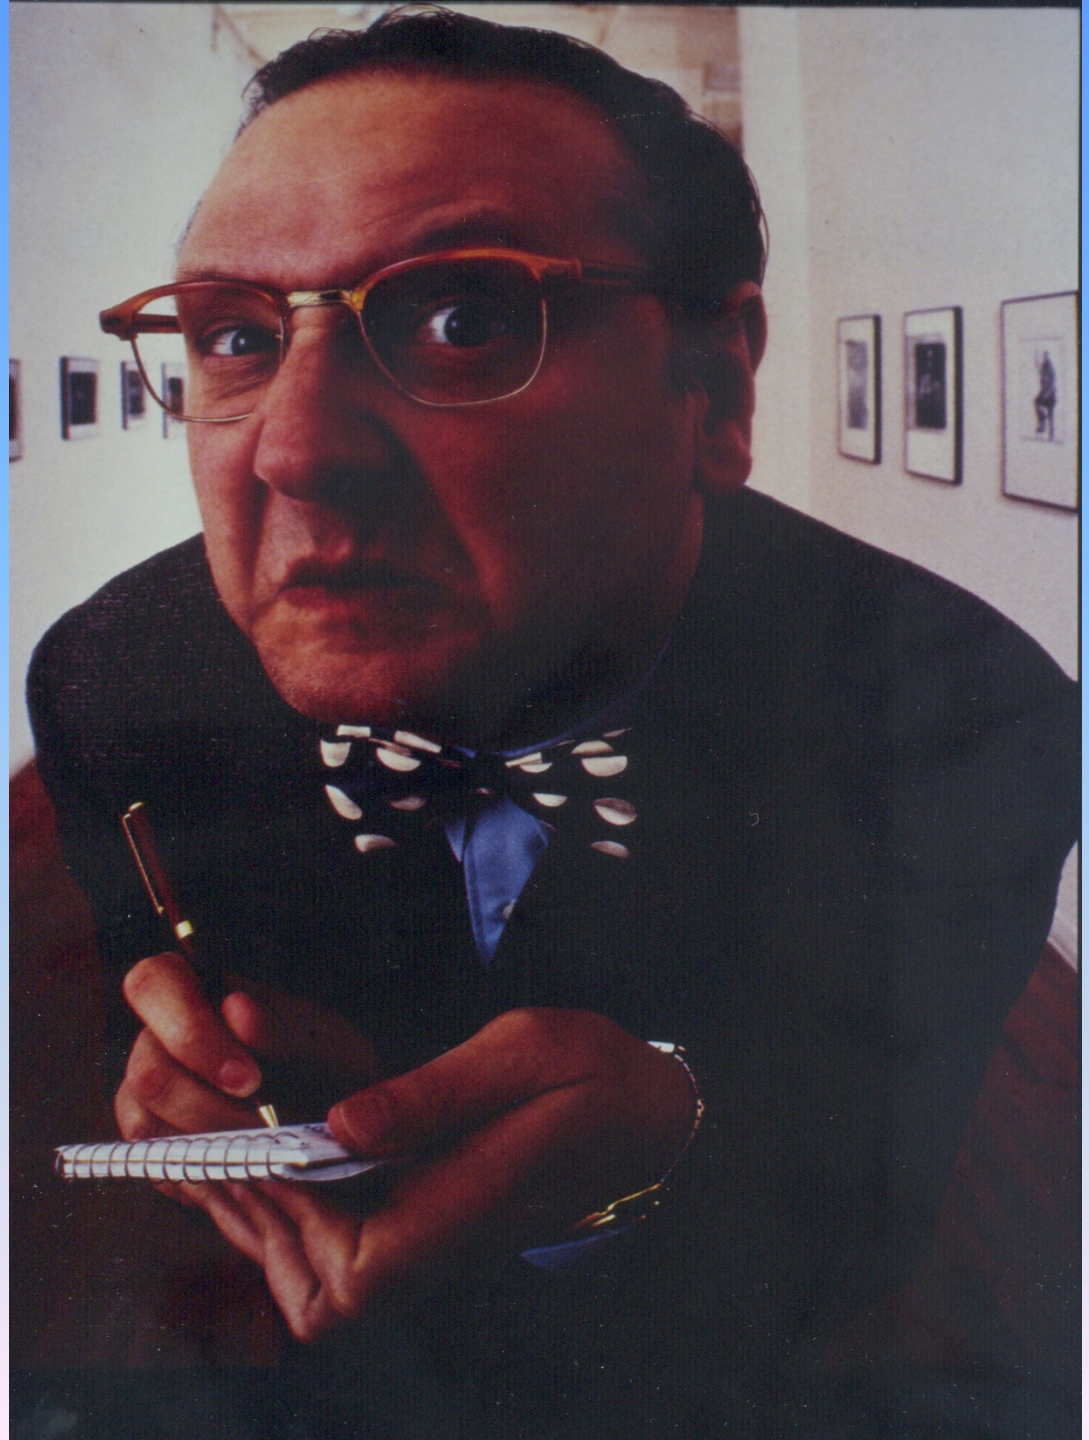
Eugene
Baibourine
CU