Objective DNA Mixture Information in the Courtroom: Relevance, Reliability & Acceptance

NIST International Symposium on Forensic Science Error Management: Detection, Measurement and Mitigation July, 2015 Washington, DC


> Mark W Perlin, PhD, MD, PhD Cybergenetics, Pittsburgh, PA



Cybergenetics © 2003-2015

DNA mixture

Two or more people contribute their DNA to a sample

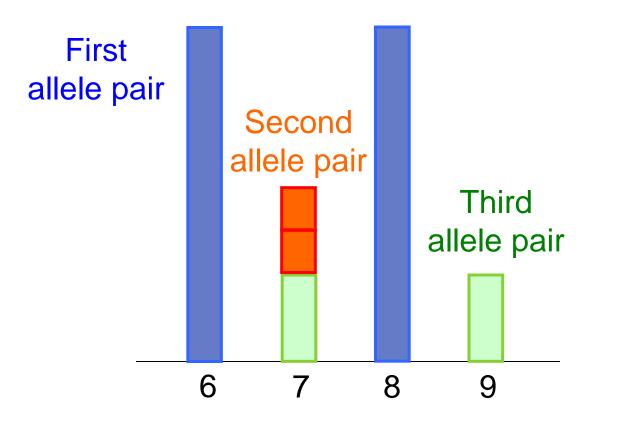

Forensic question

Did suspect Nelson Clifford contribute his DNA to the victim's clothing in a fifth case?

Man charged in multiple sexual assault cases acquitted a fourth time

Nelson Bernard Clifford, 35, remains in jail awaiting another set of charges

October 27, 2013 | By Jessica Anderson and Ian Duncan, The Baltimore Sun

A man charged in five sexual assault cases since 2010 based on DNA evidence was acquitted a fourth time Friday in Baltimore City Circuit Court, as prosecutors vowed to continue to try to convict him.

The acquittal is the latest move in a cat-and-mouse game between Nelson Bernard Clifford and the Baltimore state's attorney's office. As Clifford headed to trial on the most recent case, prosecutors refiled charges stemming from 2007 allegations, keeping him locked up without bail despite the result Friday.





Bayes law

Use data to update belief (1762)

Prob(hypothesis | data) proportional to Prob(data | hypothesis) x Prob(hypothesis)

New belief,How well hypothesisOld belief,after seeing dataexplains databefore seeing data

posterior

likelihood

prior

Genotype modeling

Apply Bayes law to genetic identification


Prob(genotype | data) proportional to Prob(data | genotype) x Prob(genotype)

New genotype probability, after seeing data posterior How well genotype choice **explains** data *likelihood* Old genotype probability, **before** seeing data *prior*

Probabilistic genotyping


Genetic data

Quantitative peak heights at locus TH01

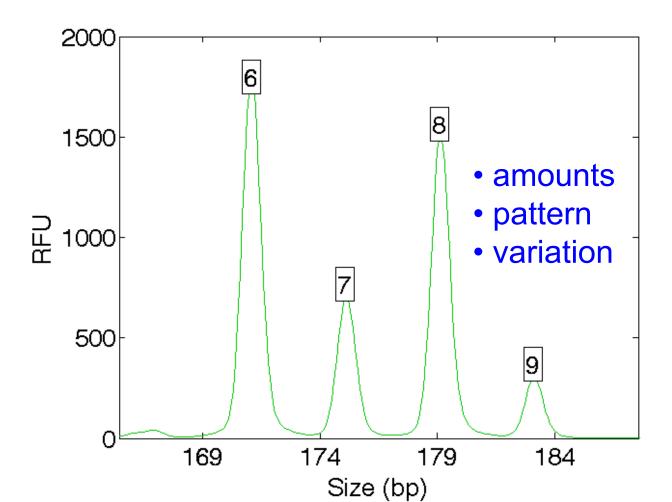


Separate genotypes

Consider every possible genotype (Bayes)

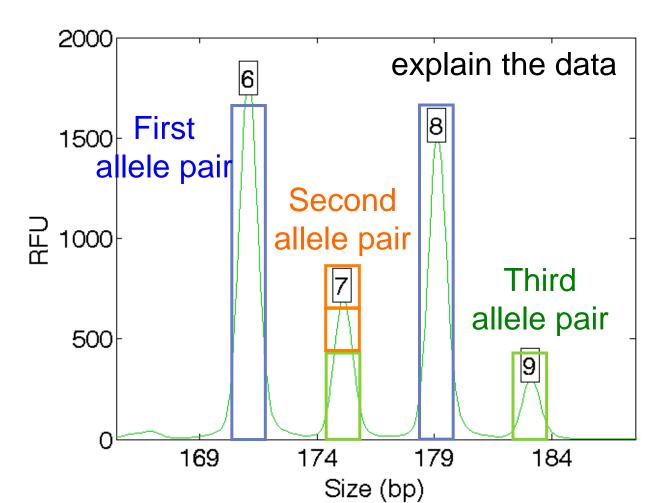


Separated genotype

Objective, **unbiased** – doesn't know suspect's genotype

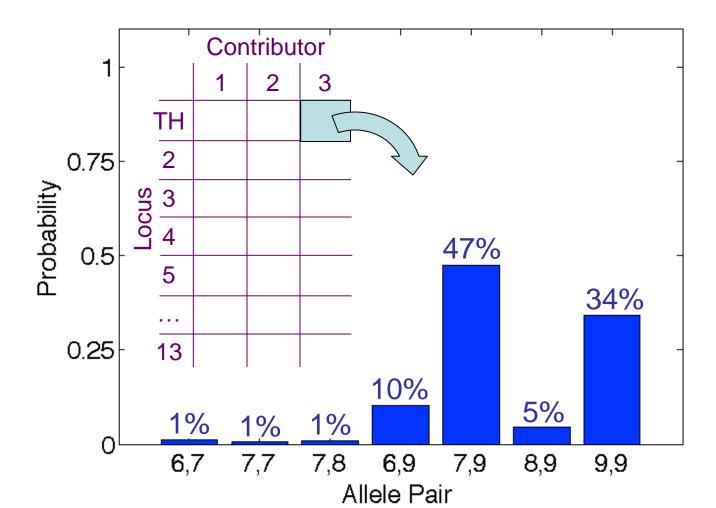

Relevance (FRE 403)

Hypothesis = "suspect contributed his DNA"

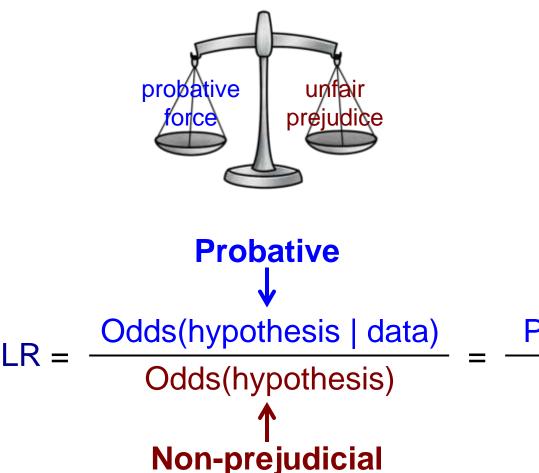



likelihood ratio (LR) is Bayes law for a hypothesis

Prob(genotype | data) Prob(genotype)

Match statistic is simple

Suspect matches evidence more than random person

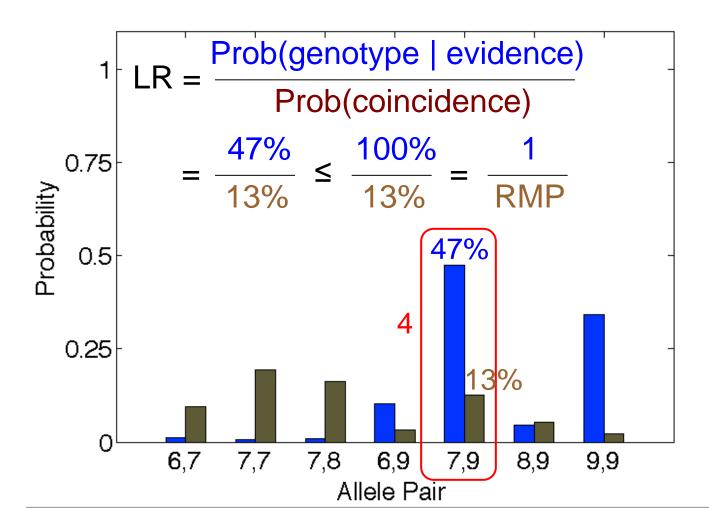


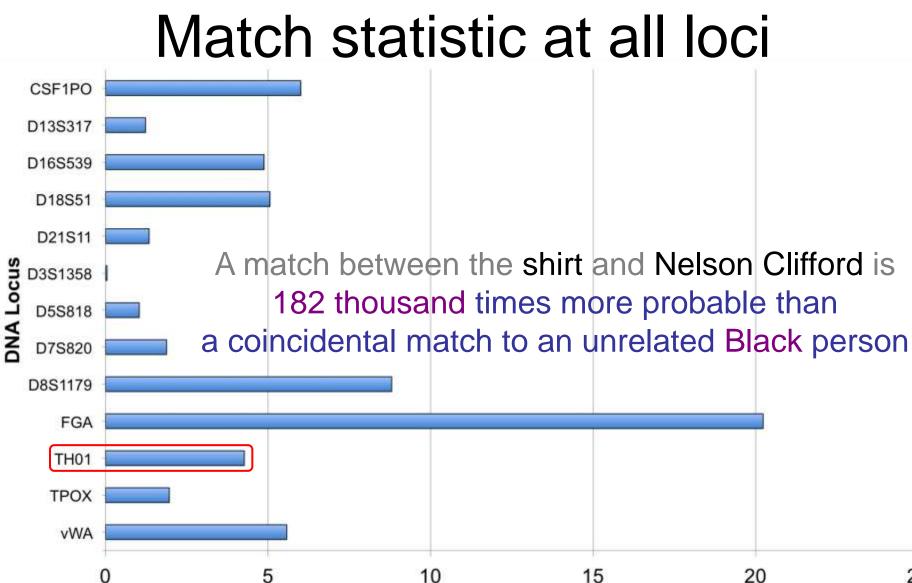


Likelihood Ratio

25


Specificity of evidence genotype

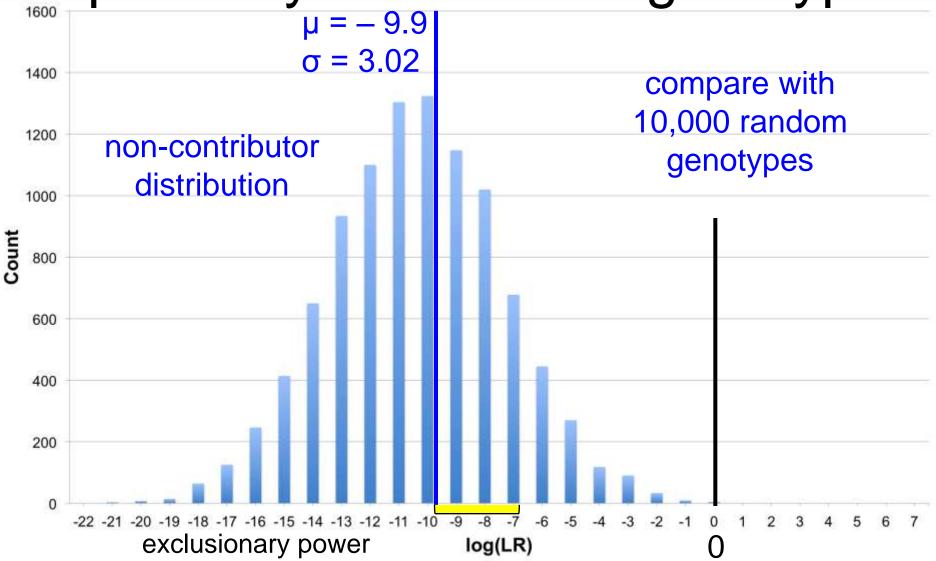

Error rate for match statistic

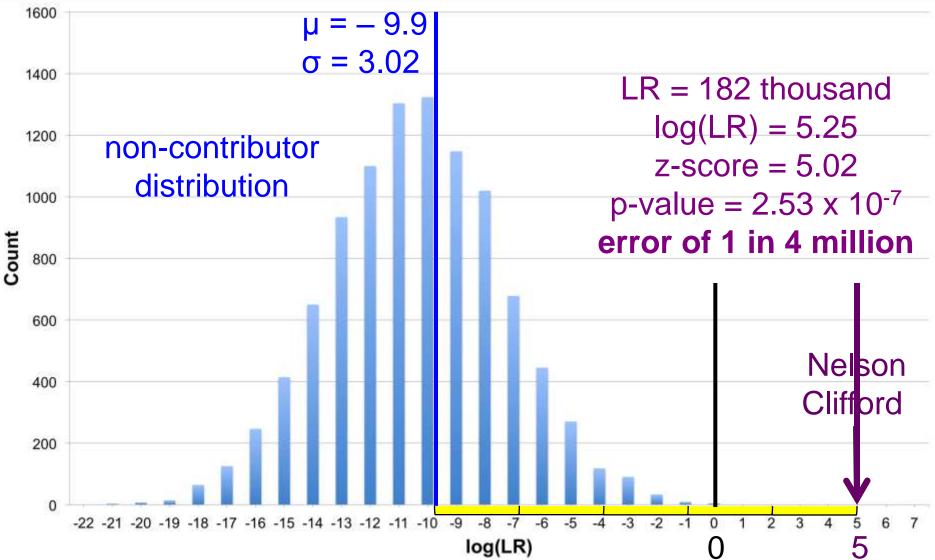

Separated DNA mixture

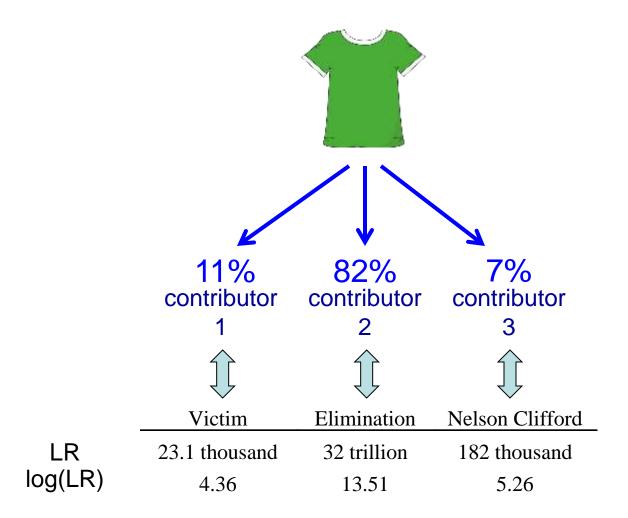

Case outcome

Jury convicts sex offender in fifth trial

By Justin George and Justin Fenton The Baltimore Sun contact the reporters

SHARELINES

After four acquittals, jurors convicted Nelson Clifford of sex offenses in a fifth trial.

Nelson Clifford faces life in prison after a jury convicted him of sex offenses Friday.

Y Prosecutors view conviction of sex offender as a needed win against predatory behavior.

MAY 8, 2015, 8:42 PM

A Baltimore jury convicted a man Friday who had been acquitted in four previous sexual assault trials, a win for prosecutors who revived the discarded case in a bid to secure an elusive conviction.

Nelson Bernard Clifford, a convicted sex offender, was found guilty of two counts of third-degree sex offense. While the counts individually carry a maximum sentence of 10 years, prosecutors say Clifford faces an enhanced penalty — up to life in prison — because of prior convictions.

Validation papers

Perlin MW, Sinelnikov A. An information gap in DNA evidence interpretation. *PLoS ONE*. 2009;4(12):e8327.

Ballantyne J, Hanson EK, Perlin MW. DNA mixture genotyping by probabilistic computer interpretation of binomially-sampled laser captured cell populations: Combining quantitative data for greater identification information. *Science & Justice*. 2013;53(2):103-14.

Perlin MW, Hornyak J, Sugimoto G, Miller K. TrueAllele[®] genotype identification on DNA mixtures containing up to five unknown contributors. *Journal of Forensic Sciences*. 2015;*on-line*.

Greenspoon SA, Schiermeier-Wood L, Jenkins BC. Establishing the limits of TrueAllele[®] Casework: a validation study. *Journal of Forensic Sciences*. 2015;*in press*.

Perlin MW, Legler MM, Spencer CE, Smith JL, Allan WP, Belrose JL, Duceman BW. Validating TrueAllele[®] DNA mixture interpretation. *Journal of Forensic Sciences*. 2011;56(6):1430-47.

Perlin MW, Belrose JL, Duceman BW. New York State TrueAllele[®] Casework validation study. *Journal of Forensic Sciences*. 2013;58(6):1458-66.

Perlin MW, Dormer K, Hornyak J, Schiermeier-Wood L, Greenspoon S. TrueAllele[®] Casework on Virginia DNA mixture evidence: computer and manual interpretation in 72 reported criminal cases. *PLOS ONE*. 2014;(9)3:e92837.

Latest peer-reviewed study




Mark W. Perlin,¹ Ph.D., M.D.; Jennifer M. Hornyak,¹ M.S; Garett Sugimoto,² M.S; and Kevin W.P. Miller,² Ph.D.

TrueAllele^â Genotype Identification on DNA Mixtures Containing up to Five Unknown Contributors*

KEYWORDS forensic science, DNA mixture, genotype modeling, validation study, likelihood ratio, probabilistic genotyping

ABSTRACT: Computer methods have been developed for mathematically interpreting mixed and low-template DNA. The genotype modeling approach computationally separates out the contributors to a mixture, with uncertainty represented through probability. Comparison of inferred genotypes calculates a likelihood ratio (LR), which measures identification information. This study statistically examined the genotype modeling performance of Cybergenetics TrueAllete[®] computer system. High- and low-template DNA mixtures of known randomized composition containing 2, 3, 4, and 5 contributors were tested. Sensitivity, specificity, and reproducibility were established through LR quantification in each of these eight groups. Covariance analysis found LR behavior to be relatively invariant to DNA amount or contributor number. Analysis of variance found that consistent solutions were produced, once a sufficient number of contributors were considered. This study demonstrates information outcome for a DNA mixture analysis.

Specificity

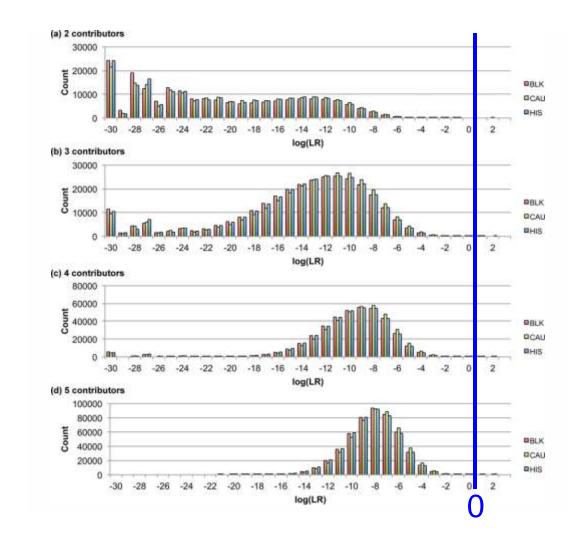

2


3

4


5

- low-template DNA compare millions
- exclusionary power
- contributor number
- false positive table
- error rate in court

Sensitivity

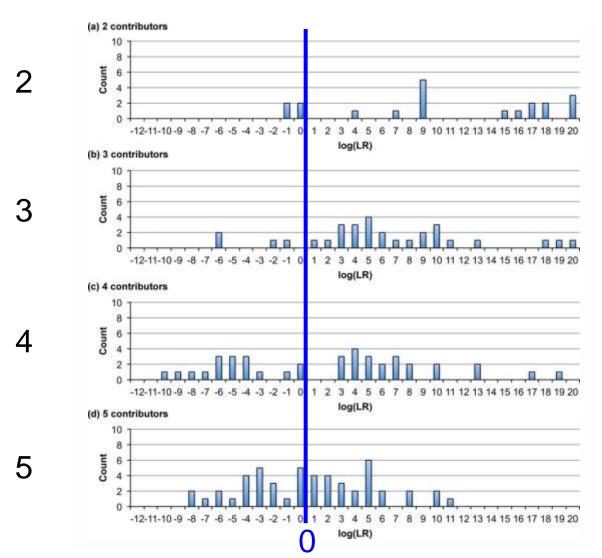

Reproducibility

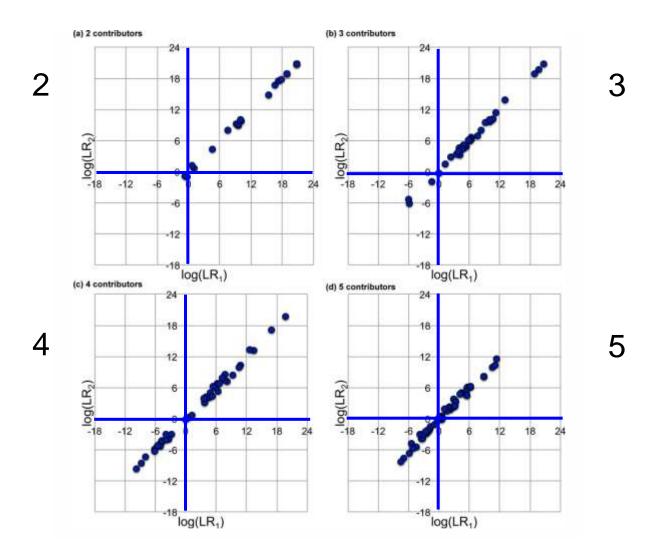

Reliability (FRE 702)

- based on sufficient facts or data
- product of reliable principles and methods
- expert has reliably **applied methods** to **data**

Daubert factors:

 (1) methods centered upon a testable hypothesis
(2) error rate associated with the method
(3) method has been subject to peer review
(4) generally accepted in relevant scientific community (Frye criterion)

Acceptance is widespread

Admitted after Daubert or Frye challenge in: California, Louisiana, New York, Ohio, Pennsylvania, Virginia, Australia & United Kingdom

Used in hundreds of criminal cases in most of the United States, for both prosecution and defense

Crimes labs use TrueAllele[®] system in California, South Carolina & Virginia; others starting soon

TrueAllele brings DNA mixture evidence back into the case, with *guilty plea* the most common outcome

Conclusions

- Objective genotyping eliminates examination bias
- Identification information for cases and validations
- Validation establishes accuracy and error rates
- Courts need solid science empirically proven

- Criminal justice
- Societal safety
- Conviction integrity

Learning about genotyping

http://www.cybgen.com/information



- Courses
- Newsletters
- Newsroom
- Presentations
- Publications
- Webinars

http://www.youtube.com/user/TrueAllele TrueAllele YouTube channel





perlin@cybgen.com